

Smart Web Manager for AP-ACS1500 Door Access Control System

The screenshot shows the web interface for the AddPac Door Access Control System. The header includes the title "Door Access Control System" and "Version 1.0.0". A notification banner states "Access control setting changed" with a link to "click here to transmitting to terminal". The user is logged in as "Administrator". The main menu includes "Home", "User and Terminal", "Access Control", "Card", and "Log and Report". The main content area features a welcome message and four primary function buttons: "Import User and Terminal", "Terminal Sync.", "Register a Card", and "Event Log". Each button has an icon and a brief description of its function.

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Welcome to AddPac Technology Door Access Control System.

The door access control system(DACS) interworks with AddPac IP-Next system to manage the door access and access control related configuration. You may execute applicable features through each menu below and detail configuration can be accessible from each menu in upper menu.

- Import User and Terminal**
Import user and terminal list from IP-Next system to use for Door Access Control System (DACS).
- Terminal Sync.**
Synchronize user, access group and schedule policy with specified terminal(s).
- Register a Card**
Register a new card to access terminal.
- Event Log**
Search event log who accessed terminal and what system logged with various search condition.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

AddPac

AddPac Technology

Sales and Marketing

www.addpac.com

Contents

- DACS Login
- DACS Main
- User List
- Terminal List
- Import User and Terminal
- Terminal Sync
- Access Control Group
- Schedule Template
- Day Template
- Card List
- Register a Card
- Event Log

DACS Login

DACS Login
웹 브라우저를 실행하여 ACS1000의 IP 주소를 입력하면 DACS 접속할 수 있는 로그인 화면이 열립니다.



관리자 인증
관리자의 아이디와 비밀번호를 입력하고 로그인 버튼을 클릭하면 인증이 완료됩니다.

DACS Main

Door Access Control System
Version 1.0.0

④ **Access control setting changed**
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

메인 메뉴
상단의 '메인 메뉴'를 통해서 DACS (Door Access Control System) 의 User and Terminal 관리 및 Access Control, Card 정책을 설정 할 수 있습니다.

바로 가기
자주 사용하는 기능에 대한 바로 가기 아이콘 입니다. (Import User and Terminal / Terminal Sync / Register a Card / Event Log)

Import User and Terminal
Import user and terminal list from terminal list to use for Access Control System


Terminal Sync.
Synchronize user, access group and schedule policy with specified terminal(s).

Register a Card
Register a new card to access terminal.

Event Log
Search event log who accessed terminal and what system logged with various search condition.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

DACS Logout

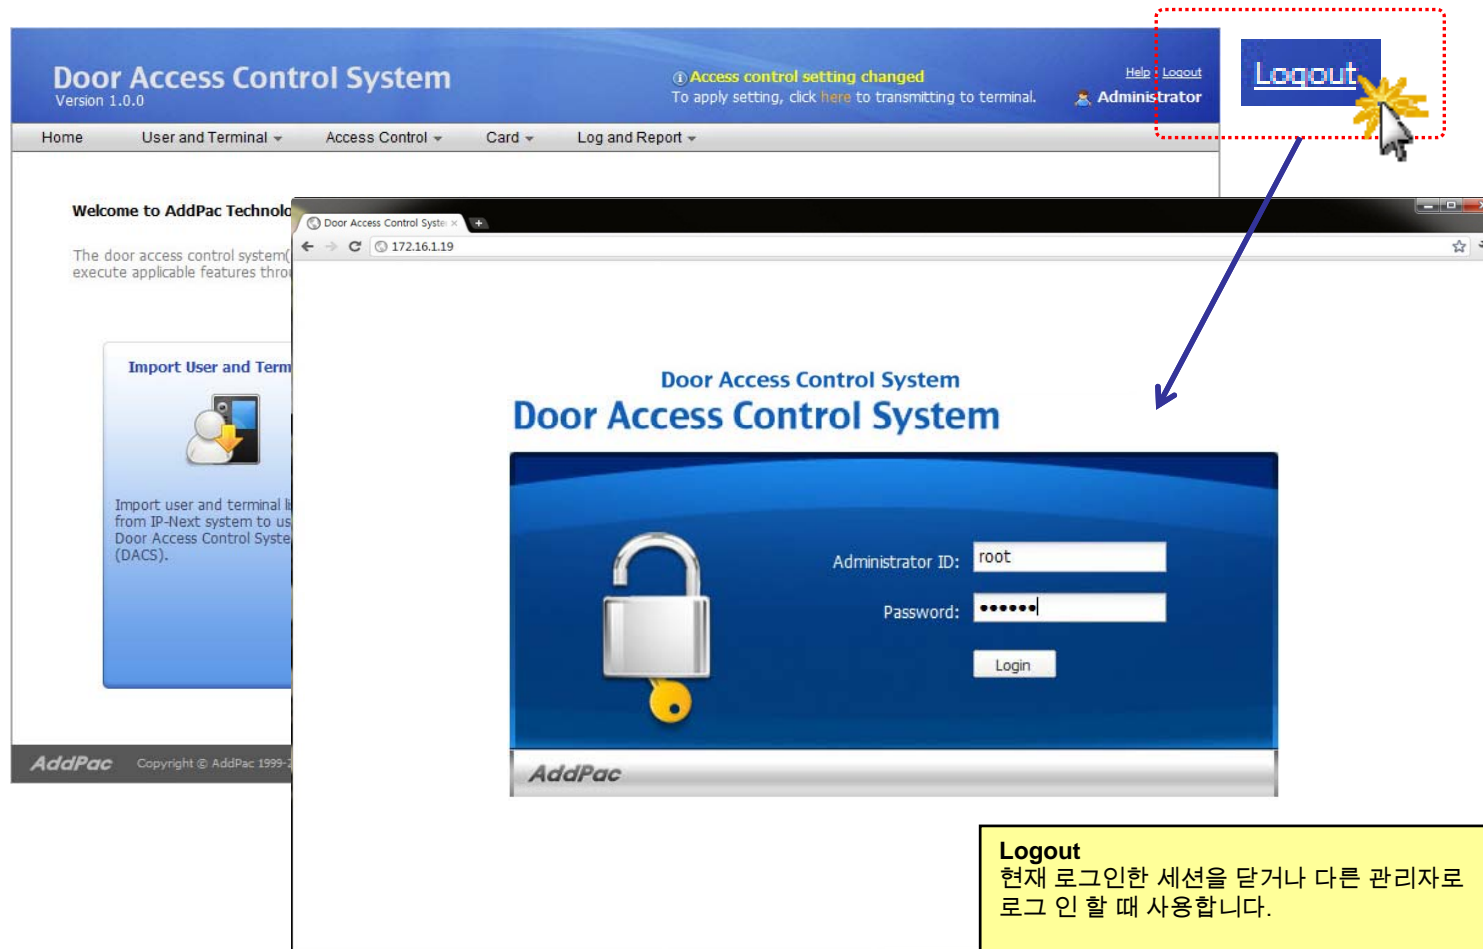

The screenshot displays the DACS web interface. At the top, the header includes "Door Access Control System Version 1.0.0", a notification "Access control setting changed", and user information "Administrator". A "Logout" button is highlighted with a red dashed box. A blue arrow points from this button to a yellow box with the following text:

Logout
현재 로그인한 세션을 닫거나 다른 관리자로 로그인 할 때 사용합니다.

User List (1/3)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

User List

Terminal List

Welcome
Import User and Terminal
Terminal Sync.
The door access control system can execute applicable features through...

Import User and Terminal

Import user and terminal list from IP-Next system to use Door Access Control System (DACS).

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

User List

Search registered access terminal user or search for all users. You can proceed add/change/delete through the screen.

Search List: All Users Input search word Search Import User

	Extension	Name	Department	Access Policy	Date Created	Modify	Delete
1	1000	Choi jinsuk	/SFloor/SM/	Access Allow	2011-07-22 15:50:01		
2	1008	Kwon hyojuun	/SFloor/SM/	Access Allow	2011-07-22 15:50:00		
3	1014	Oh hyoungsuk	/SFloor/Framework/	Access Allow	2011-07-22 15:50:01		
4	1015	Choi byunggu	/SFloor/Framework/	Access Allow	2011-07-22 15:50:01		
5	1016	Lee seonghyun	/SFloor/Framework/	Access Allow	2011-07-22 15:50:01		

Page 1 of 1 Total: 5

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

User List (2/3)

Door Access Control System

Version 1.0.0

① Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout Administrator

Home
User and Terminal ▾
Access Control ▾
Card ▾
Log and Report ▾

User List

Search registered access terminal user or search for all users. You can proceed add/change/delete through the screen.

Search List: All Users

Extension	Name	Department	Access Policy	Date Created	Modify	Delete
1 1000	Choi jinsuk	/5Floor/SM/	Access Allow	2011-07-22 15:50:01		
2 1008	Kwon hyojun	/5Floor/SM/	Access Allow	2011-07-22 15:50:00		
3 1014	Oh hyoungsuk	/5Floor/Framework/	Access Allow	2011-07-22 15:50:01		
4 1015	Choi byunggu	/5Floor/Framework/	Access Allow	2011-07-22 15:50:01		
5 1016	Lee seonghyun	/5Floor/Framework/	Access Allow	2011-07-22 15:50:01		

All Users
 Last Name
 First Name
 Department
 Extension
 All Users
 Deleted Users

User Information and Policy

1 Profile

2 Access Policy

3 Access Policy

Total: 5

User List
 AddPac IP-Next System 으로부터 Import 한 사용자 정보를 보여줍니다.
 Last Name/ First Name/ Department/ Extension/ All Users/ Deleted Users 으로 검색 할 수 있으며, 사용자 등록, 변경, 삭제 가능합니다

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

User List (3/3)

Door Access Control System
Version 1.0.0

[Help](#) | [Logout](#)
 Access control setting changed
 To apply setting, click [here](#) to transmitting to terminal. Administrator

Home User and Terminal ▾ Access Control ▾ Card ▾ Log and Report ▾

User Information and Policy

1. Profile

Extension Number: (4 digit Number)

First Name:

Last Name:

Position:

Department:

E-Mail:

Home Phone:

Mobile Phone:

Card Serial Number:

Picture:

2. Security Access Policy

If you allow this user to access, be sure the checkbox to enable.

Allow access

Select available access group for this user. You can choose one or more access groups.

Access group list		
Group Name	Schedule Policy	Description
3floor door	All Allow	

Applied access group list		
Group Name	Schedule Policy	Description
default group	All Allow	default access...
job policy	working day	job policy acce...

To apply this features, select 'Apply' or 'Cancel'

Profile
 AddPac IP-Next System 으로부터 Import 한 사용자 정보를 보여줍니다. 프로파일 정보는 편집 되지 않으며, 'Register a Card' 단추 클릭을 통해 RF Card를 등록 할 수 있습니다.

Security Access Policy
 해당 사용자의 출입 단말기 권한을 설정 할 수 있습니다.

Terminal List (1/2)

The screenshot displays the 'Door Access Control System' web interface. The top navigation bar includes 'Home', 'User and Terminal', 'Access Control', 'Card', and 'Log and Report'. A notification at the top right states 'Access control setting changed' and provides a link to 'transmitting to terminal'. The user is logged in as 'Administrator'.

The 'Terminal List' page is active, showing a table of registered door phone lists. The table has the following columns: Terminal Name, Description, Status, Extension, IP Address, Model Name, Version, Date Created, and Detail View. There are four entries in the table, all with a status of 'Disconnected'. The fourth entry has a red warning icon and the text 'Required setting'.

Terminal Name	Description	Status	Extension	IP Address	Model Name	Version	Date Created	Detail View
1 2floor door terminal	2Floor door ter...	Disconnected	1006	172.16.10.4	AP-VAC50		2011-07-29 17:08:50	
2 3floor door terminal	3Floor door ter...	Disconnected	1002	172.16.10.1	AP-VAC20	8.50.001	2011-07-22 15:50:01	
3 5floor door terminal	5Floor door ter...	Disconnected	1005	172.16.10.2	AP-VAC50		2011-07-29 17:08:50	
4 The main entrance d...	The main entran...	Disconnected	Required setting	172.16.10.3	AP-VAC100		2011-07-29 17:08:50	

The interface also features a sidebar with 'Import User and Terminal' options and a footer with 'AddPac Copyright © AddPac 1999-2011'.

Terminal List (2/2)

Door Access Control System

Version 1.0.0

① Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout Administrator

Home
User and Terminal ▾
Access Control ▾
Card ▾
Log and Report ▾

Terminal List

Display the registered door phone lists imported from IP-Next PBX system.

Terminal Name	Description	Status	Extension	IP Address	Model Name	Version	Date Created	Detail View
1	2floor door terminal	Disconnected	1006	172.16.10.4	AP-VAC50		2011-07-29 17:08:50	[Detail View]
2	3floor door terminal	Disconnected	1002	172.16.10.1	AP-VAC20	8.50.001	2011-07-22 15:50:01	[Detail View]
3	5floor door terminal	Disconnected	1005	172.16.10.2	AP-VAC50		2011-07-29 17:08:50	[Detail View]
4	The main entrance d...	Disconnected	❗ Required setting	172.16.10.3	AP-VAC100		2011-07-29 17:08:50	[Detail View]

SmartWeb Manager

- System
- Call & Media
- Miscellaneous

System Information

HW Version	1.0
SW Version	8.00.001
DACS	(0)
DACS Registration	Fail
SP	172.17.255.250(5000)

Information

AddPac Technology
Model: VAC20_02
DACS: (0)
DACS Registration: Fail
SP: 172.17.255.250(5000)

Terminal List
AddPac IP-Next System 으로부터 Import 한 출입 단말기 리스트를 보여줍니다. 출입 단말기의 상태 정보는 주기적으로 업데이트되며, 'Detail View' 단추를 통해 출입 단말기에 직접 접속할 수 있습니다.

AddPac
Copyright © AddPac 1999-2011. All Rights Reserved
Total: 4

Import User and Terminal (1/2)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home | User and Terminal | Access Control | Card | Log and Report

User List
Terminal List
Import User and Terminal
Terminal Sync

Welcome to the Door Access Control System (DACS) interface. The door access control system (DACS) interwork with IP-Next PBX system to execute applicable features through each menu.

Import User and Terminal

Import user and terminal list from IP-Next system to use for Door Access Control System (DACS).

Syn and spe

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home | User and Terminal | Access Control | Card | Log and Report

Import User and Terminal

You can import the users and terminals from IP-Next PBX system. This job can be used when you first install or users and terminals are newly added or changed in a IP-Next PBX system.

User | Terminal

1. User list to be imported

Total Users: 12 Changed: 1 Added: 11 Deleted: 6

Display new added users of IP-Next PBX.
The selected user will be imported to DACS(Door Access Control System).

Extension	Name	Department
<input checked="" type="checkbox"/>	1111	Hwang Wooseun /SFloor/
<input checked="" type="checkbox"/>	1005	Julian Jonathan /SFloor/
<input checked="" type="checkbox"/>	1013	Ramon Jorge /SFloor/
<input checked="" type="checkbox"/>	1260	White Nigel /SFloor/
<input checked="" type="checkbox"/>	1008	Kwon Hyogun /SFloor/SM/
<input checked="" type="checkbox"/>	1000	Choi jinsuk /SFloor/SM/
<input checked="" type="checkbox"/>	4099	Ham Siyoung /SFloor/SM/

Display deleted users of IP-Next PBX.
The selected user will be deleted from DACS(Door Access Control System).

Extension	Name	Department
<input checked="" type="checkbox"/>	1000	Choi jinsuk /SFloor/SM/
<input checked="" type="checkbox"/>	1015	Choi byunggu /SFloor/Framework/
<input checked="" type="checkbox"/>	1016	Lee seonghyun /SFloor/Framework/
<input checked="" type="checkbox"/>	1111	Hwang wooseun /SFloor/

2. Select Access Control Group Policy

Select access control group policy for selected added users and you can select one or more groups.

Group Name	Description
<input type="checkbox"/>	3floor door
<input type="checkbox"/>	job policy
<input checked="" type="checkbox"/>	default group

To apply this features, select 'Apply' or 'Cancel'

Apply Cancel

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Import User and Terminal (2/2)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Hide | Logout
Administrator

Home | User and Terminal | Access Control | Card | Log and Report

Import User and Terminal

You can import the users and terminals from IP-Next PBX system.
This job can be used when you first install or users and terminals are newly added or changed in a IP-Next PBX system.

User | Terminal

1. User list to be imported

Total Users: 12 Changed: 1 Added: 11 Deleted: 6

Display new added users of IP-Next PBX.
The selected user will be imported to DACS(Door Access Control System).

Extension	Name	Department
1111	Hwang Woodun	/SFloor/
1005	Julien Jonathan	/SFloor/
1013	Ramon Jorge	/SFloor/
1260	White Nigel	/SFloor/
1008	Kwon Hyolun	/SFloor/SM/
1000	Choi Ginsuk	/SFloor/SM/
4099	Ham Jiyoung	/SFloor/SM/

Display deleted users of IP-Next PBX.
The selected user will be deleted from DACS(Door Access Control System).

Extension	Name	Department
1000	Choi Ginsuk	/SFloor/SM/
1015	Choi byunggu	/SFloor/Framework/
1016	Lee seonghyun	/SFloor/Framework/
1111	Hwang woodun	/SFloor/

2. Select Access Control Group Policy

Select access control group policy for selected sticker users and you can select one or more groups.

Group Name	Description
3floor door	
job policy	job policy access group
<input checked="" type="checkbox"/> default group	default access group

To apply this features, select Apply or Cancel.

Apply Cancel

AddPac Copyright © AddPac, 1999-2011. All Rights Reserved.

User list to be imported

AddPac IP-Next System 에서 운영되는 사용자 목록을 출입 통제 시스템으로 가져오는 작업을 수행합니다. 새롭게 추가/변경된 사용자 정보만 출력합니다..

Select Access Control Group Policy

AddPac IP-Next System 에서 운영되는 사용자 (새롭게 추가/변경)에 대한 출입 권한 정책을 적용 합니다.

Terminal Sync (1/2)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

User List
Terminal List
Import User and Terminal
Terminal Sync

Welcome
The door access control system will execute applicable features this time.

Terminal Sync.
Synchronize user, access group and schedule policy with selected terminals.
Default checked terminals have updated configurations need to be synchronized.

<input checked="" type="checkbox"/>	Terminal Name	IP Address	Connection Status	Sync Status
<input checked="" type="checkbox"/>	2floor door terminal	172.16.10.4	Disconnected	Not yet synchronized
<input checked="" type="checkbox"/>	3floor door terminal	172.16.10.1	Disconnected	Not yet synchronized
<input checked="" type="checkbox"/>	5floor door terminal	172.16.10.2	Disconnected	Not yet synchronized
<input checked="" type="checkbox"/>	The main entrance door	172.16.10.3	Disconnected	Not yet synchronized

To synchronize with selected terminal above, select 'Sync' button below. Select 'Cancel' button to cancel.

Sync Cancel

AddPac Copyright © AddPac 1999-2011

Terminal Sync (2/2)

Door Access Control System
Version 1.0.0

④ Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Terminal Sync.

Synchronize user, access group and schedule policy with selected terminals.
Default checked terminals have updated configurations need to be synchronized.

<input checked="" type="checkbox"/>	Terminal Name	IP Address	Connection Status	Sync Status
<input checked="" type="checkbox"/>	2floor door terminal	172.16.10.4	Disconnected	Not yet synchronized
<input checked="" type="checkbox"/>	3floor door terminal	172.16.10.1	Disconnected	Not yet synchronized
<input checked="" type="checkbox"/>	5floor door terminal	172.16.10.2	Disconnected	Not yet synchronized
<input checked="" type="checkbox"/>	The main entrance door	172.16.10.3	Disconnected	Not yet synchronized

select 'Cancel' button to cancel.

Terminal Sync
출입 통제 시스템과 출입 단말기 간의 Sync status 를 확인
합니다. Not yet synchronized 상태이면 'Sync' 버튼을 통해
출입 권한 정책을 해당 단말기로 전송합니다.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Access Control Group (1/3)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Welcome to AddPac Technology
The door access control system (DACS) can execute applicable features through the system.

Import User and Terminal
Import user and terminal list from IP-Next system to use Door Access Control System (DACS).

Access Control Group
You can define a new Access Control Group with one or more terminals, users and schedule policy. Also, you can adjust priority of access control group using up/down arrow (or mouse drag/drop).

Add a Access Control Group

Group Name	Description	Schedule Policy	Date Created	Modify	Delete
3floor door		All Allow	2011-06-28 11:37:13		
job policy	job policy access group	working day	2011-07-04 17:06:47		
default group	default access group	All Allow	2011-06-28 11:37:13		

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Access Control Group (2/3)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home
User and Terminal ▾
Access Control ▾
Card ▾
Log and Report ▾

Access Control Group

You can define a new Access Control Group with one or more terminals, users and schedule policy.
Also, you can adjust priority of access control group using up/down arrow (or mouse drag/drop).

Group Name	Description	Schedule Policy	Date Created	
↑↓ 3floor door		All Allow	2011-06-28 11:37:13	Modify <input type="checkbox"/> Delete <input type="checkbox"/>
↑↓ job policy	job policy access group	working day	2011-07-04 17:06:47	Modify <input type="checkbox"/> Delete <input type="checkbox"/>
↑↓ default group	default access group	All Allow	2011-06-28 11:37:13	Modify <input type="checkbox"/> Delete <input type="checkbox"/>

Access Control Group
 생성된 Access Control Group 리스트를 보여줍니다.
 'Add a Access Control Group' 단추를 클릭하여 출입 권한 정책을 조회 하거나 신규로 등록 할 수 있습니다.
 Access Group은 위/아래 화살표를 이용하여 우선순위를 조정할 수 있습니다.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Access Control Group (3/3)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Hide | Logout | Administrator

Home User and Terminal Access Control Card Log and Report

Access Control Group

You can select terminals and schedule policy for this access control group. This access control group can be applied to one or more users at user setting page.

1. Group Information

Group Name*

Description

2. Select Terminal Access Policy

Select terminal to apply this access control group.

Terminal List	
Terminal Name	Description
2floor door terminal	2Floor door terminal
3floor door terminal	3Floor door terminal

List of applied terminals	
Terminal Name	Description
5floor door terminal	5Floor door terminal
The main entrance...	The main entrance door

3. Select Schedule Policy

Select schedule template to apply this access control group.

All Allow

To apply this features, please select 'Add' or 'Apply' button. To cancel, Select 'Cancel' button.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Add a Access Control Group
Select Terminal Access Policy
- 출입 권한 정책에 적용하기 위한 출입 단말기를 선택 합니다.
Select Schedule Policy
- 출입 권한 정책에 적용하기 위한 스케줄 템플릿을 선택 합니다.

Schedule Template (1/3)

The screenshot shows the 'Door Access Control System' web interface. The top navigation bar includes 'Home', 'User and Terminal', 'Access Control', 'Card', and 'Log and Report'. A red dashed box highlights the 'Access Control' menu, which is expanded to show 'Access Control Group', 'Schedule Template', and 'Day Template'. A blue arrow points from the 'Schedule Template' menu item to the 'Schedule Template' page below. The 'Schedule Template' page features a table with the following data:

	Template Name	Description	Date Created	Schedule Rules	Modify	Delete
1	All Allow	any time allowed	2011-07-28 16:28:46			
2	All Deny	any time denied	2011-07-28 16:29:09			
3	working day	working day template	2011-07-21 09:56:56			

The page also includes a 'Add a Schedule Template' button and a footer with 'AddPac Copyright © AddPac 1999-2011 All Rights Reserved'.

Schedule Template (2/3)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Schedule Template

Add schedule template for one or more schedule rules which define time, day and date duration.
This schedule template can be applied to one or more access group policies.

Template Name	Description	Date Created	Schedule Rules	Modify	Delete
1 All Allow	any time allowed	2011-07-28 16:28:46			
2 All Deny	any time denied	2011-07-28 16:29:09			
3 working day	working day template	2011-07-21 09:56:56			

[Add a Schedule Template](#)

Schedule Template
생성된 Schedule Template 리스트를 보여줍니다.
'Add a Schedule Template' 단추를 클릭하여 스케줄 템플릿을 등록/수정하며, 생성된 템플릿에 다양한 룰을 적용할 수 있습니다.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Schedule Template (3/3)

Door Access Control System
Version 1.0.0

① Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Schedule Rules (All Allow)

Display one or more schedule rules for a schedule template.
Also, you can adjust priority of schedule rules using up/down arrow (or mouse drag/drop).

Name	Description	Start	End	Date	Day Template	Access Policy	Date Created	Modify	Delete
↑ All allow time	All allow time	00:00	23:59	Sun ,Mon ,Tue ,...		Allow	2011-07-21 09:59:15		

Schedule Rule
You can define schedule rule which defines time duration to allow or deny the entrance.
You can specify special day(s) with Day Template.

Rule Name*

Description

Time ~

Day of Week Mon Tue Wed Thu
 Fri Sat Sun

Day Template

Access Policy Allow Deny

To apply this feature, please select 'Add' or 'Apply' button. To cancel, Select 'Cancel' button.

Schedule Rule
생성된 Schedule Rule 리스트를 보여줍니다.
'Add a Schedule Rule' 단추를 클릭하여 스케줄 템플릿에 적용할 Rule을 등록할 수 있으며, 다양한 옵션 (Time / Day of Week / Day Template / Access Policy)을 지정 할 수 있습니다.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Day Template (1/2)

The screenshot displays the 'Door Access Control System' web interface. The top navigation bar includes 'Home', 'User and Terminal', 'Access Control', 'Card', and 'Log and Report'. A dropdown menu under 'Access Control' is open, showing 'Access Control Group', 'Schedule Template', and 'Day Template'. A yellow starburst icon is placed over the 'Day Template' option. A blue arrow points from this option to the 'Day Template' page.

The 'Day Template' page features a header with a notification: 'Access control setting changed. To apply setting, click here to transmitting to terminal.' The user is identified as 'Administrator'. Below the header, there is a section titled '12 Day Template' with a sub-header 'Add day template for one or more day rules which define special day(s). This template can be applied to one or more schedule rules.' A table lists existing templates, and an 'Add a Day template' button is visible.

Template Name	Description	Date Created	Day(s)	Modify	Delete
1 Public Holidays	Public Holidays				
2 addpac holidays	addpac holidays				
3 test		2011-08-09 13:47:01			

Day Template (2/2)

Door Access Control System
Version 1.0.0

④ Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

12 Day Template

Add day template for one or more day rules which define special day(s).
This template can be applied to one or more schedule rules.

Template Name	Description	Date Created	Day(s)	Modify	Delete
1 Public Holidays	Public Holidays				
2 addpac holidays	addpac holidays				
3 test		2011-08-09 13:47:01			

Add a Day template

Day Template

Change the name of day template

Template Name : Public Holidays

Description : Public Holidays

Apply Cancel

Day List (Public Holidays)

Name	Description	Start Day	End Day	Date Created	Modify	Delete
1 Independence Day	Independence Day	08-15	08-17			
2 Chuseok	Chuseok	09-20	09-21			

Day Template

생성된 Day Template 리스트를 보여줍니다.
'Add a Day Template' 단추를 클릭하여 공휴일
이나 특정한 날짜/요일을 등록한 후 Schedule
Rule에 적용하여 출입 권한 정책을 수행할 수 있
습니다.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Card List (1/2)

The screenshot displays the 'Door Access Control System' web interface. The top navigation bar includes 'Home', 'User and Terminal', 'Access Control', 'Card', and 'Log and Report'. A notification banner at the top right states 'Access control setting changed' and provides a link to 'here' to transmit settings to the terminal. The user is logged in as 'Administrator'.

The main content area is titled 'Card List' and includes a search bar with a dropdown menu set to 'All card' and a 'Search' button. Below the search bar is a table of registered cards:

	Serial Number	Extension	Username	Status	Description	Date Created	Modify	Delete
1	4000238	1008	Kwon hyojun	<input checked="" type="checkbox"/> Specified	Temporary cards are issued.	2011-07-08 15:59:03		
2	123456789			<input type="checkbox"/> Unspecified		2011-07-22 16:17:04		

At the bottom of the page, there is a pagination control showing 'Page 1 of 1' and a 'Total: 2' indicator. The footer contains the 'AddPac' logo and copyright information: 'Copyright © AddPac 1999-2011 All Rights Reserved'.

Card List (2/2)

Door Access Control System
Version 1.0.0

① Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Card List

Display registered card list. Also, you can register a new card or modify/delete selected card(s).

Search List:

	Serial Number	Extension	Username	Status	Description	Date Created	Modify	Delete
1	4000238	1008	Kwon hyojun	<input checked="" type="checkbox"/> Specified	Temporary cards are issued.	2011-07-08 15:59:03	<input type="button" value="Modify"/>	<input type="button" value="Delete"/>
2	123456789			<input type="checkbox"/> Unspecified		2011-07-22 16:17:04	<input type="button" value="Modify"/>	<input type="button" value="Delete"/>

Card

Read card serial number from access terminal or save by setting up a series of numbers.

Serial Number*

Card Recognition

Description

User

Total: 2

Card List
출입 단말기에 인식할 수 있는 RF 카드 발행 현황을 조회 (All Card / Serial Number / Extension) 할 수 있습니다. 'Register a Card' 단추를 클릭하여 RF 카드 발급 및 삭제 할 수 있습니다.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Register a RF Card (1/2)

The image shows two overlapping screenshots of the AddPac Door Access Control System (DACS) web interface. The top screenshot shows the main navigation menu with the 'Card' dropdown menu open, highlighting the 'Register a Card' option. A mouse cursor is positioned over this option. The bottom screenshot shows the 'Card' registration page, which includes a header with the system name and version (1.0.0), a navigation bar, and a main content area with the following fields and buttons:

- Serial Number***: A text input field with a dropdown menu set to 'Card recognition or enter directly'.
- Card Recognition**: A dropdown menu set to 'Select card recognition terminal', with 'Read Card' and 'Write Card' buttons to its right.
- Description**: A text input field.
- User**: A text input field with a user icon and a 'Reset' button to its right.
- Buttons**: 'Register' and 'Cancel' buttons at the bottom of the form.

The interface also features a top navigation bar with 'Home', 'User and Terminal', 'Access Control', 'Card', and 'Log and Report' options. A notification banner at the top right indicates 'Access control setting changed' and provides a link to 'here' to transmit settings to the terminal. The user is logged in as 'Administrator'.

Register a RF Card (2/2)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout Administrator

Home User and Terminal Access Control Card Log and Report

Card

Read card serial number from access terminal or save by setting up a series of numbers. Setup to access into terminal by granting a card to user.

Serial Number*
Card Recognition
Description
User

Card recognition or enter directly
Select card recognition terminal
Read Card
Write Card

Select card recognition terminal
2floor door terminal
3floor door terminal
5floor door terminal
The main entrance door

Select User

Username	Extension	Department
Choi jnauk	1000	/3Floor(SM)
Kwon jonghui	1004	/
Oh hyounguk	1014	/3Floor(Framework)
Choi byunggu	1015	/3Floor(Framework)
Lee seonghyun	1016	/3Floor(Framework)
Hwang woosun	1111	/3Floor/
Han jyoung	4099	/3Floor(SM)

Register a Card
출입 단말기에 인식할 수 있는 RF 카드를 등록 합니다.

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Event Log (1/2)

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Event Log

Welcome to AddPac Technology Door Access Control System.

The door access control system(DACS) execute applicable features through...

Import User and Terminal

Import user and terminal list from IP-Next system to use Door Access Control System (DACS).

Door Access Control System
Version 1.0.0

Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator

Home User and Terminal Access Control Card Log and Report

Event Log

Display various event log with search conditions (user, datetime, terminal registration..).

Duration : 2011-07-31 ~ 2011-08-30

User Extension Number :

Event Level : Error

Search Reset

Time	Level	User Extension	Event
------	-------	----------------	-------

Page 1 of 0

Event is not registered

AddPac Copyright © AddPac 1999-2011 All Rights Reserved

Event Log (2/2)

Door Access Control System
Version 1.0.0

① Access control setting changed
To apply setting, click [here](#) to transmitting to terminal.

Help | Logout
Administrator


Home User and Terminal Access Control Card Log and Report

Event Log

Display various event log with search conditions (user, datetime, terminal registration..).

Duration : 2011-07-31 ~ 2011-08-30

User Extension Number :

Event Level : 

Error
Critical
Error
Warning
Notice
Information
Debug

Time	Level	User Extension	Event
Event is not registered			

Event Log
출입 통제 시스템에서 발생하는 사용자 정보, 출입 단말기 상태 및 기타 이벤트에 대한 이력을 조회 합니다. 목록에는 이벤트를 여러 조건을 통해서 검색할 수 있습니다

Duration
User Extension Number
Event Level

- * Critical
- * Error
- * Warning
- * Notice
- * Information
- * Debug

AddPac Copyright © AddPac 1999-2011 All Rights Reserved



Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail : sales@addpac.com