

VoIP Gateway Series

TR-069
(CPE WAN Management Protocol)



AddPac

AddPac Technology


2014, Sales and Marketing

www.addpac.com

Contents

- Protocol Architecture
- TR-069 Service Configuration (CLI, Smart Web)
- Supported Operation
- Tested High-Level Operation

Protocol Architecture

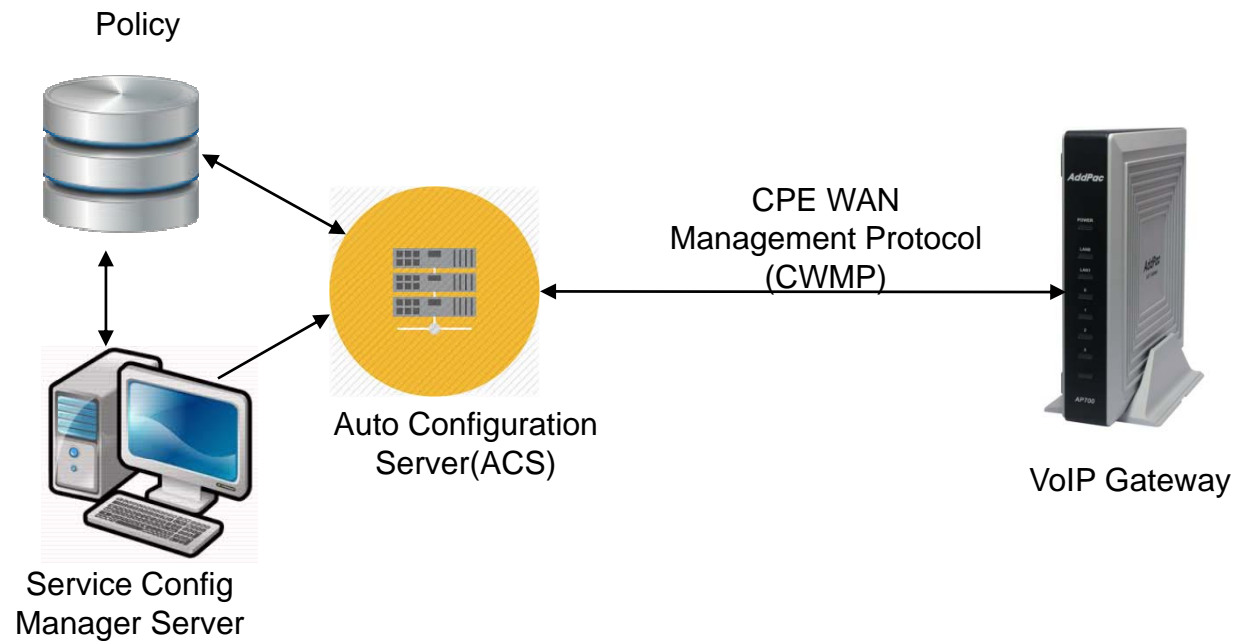

TR-069 Service Configuration (CLI)

```
!  
tr069  
  acs url http://61.33.161.2:8080/ACS/main.action  
  acs authentication login acs password *****  
  httpd port 8000  
  httpd authentication login cpe password *****  
  cpe serial-number AP-GW-12356423  
  cpe oui ADDPAC-0002A4  
  service enable  
!
```

TR-069 Service Configuration (Smart Web)

The image shows a screenshot of a web-based configuration interface for TR-069. On the left, a sidebar menu titled "Advanced" contains several options: Port Control & Statistics, Fax, Service, Filtering, Security, SNMP, and TR-069. The TR-069 option is highlighted with a dashed blue box, and an arrow points to it with the text "Select TR-069 at Advanced".

The main content area is titled "TR-069". Below the title, there is a "Service" section with two radio buttons: "Enable" (selected) and "Disable". An arrow points to this section with the text "Service Enable/Disable".

Below the "Service" section is the "ACS" section, which contains three input fields: "URL" (with the value "http://61.33.161.2:8080/ACS/main.action" and a note "(ACS Server URL start with http://)"), "Login" (with the value "acs" and a note "(optional)"), and "Password" (with masked characters "....." and a note "(optional)"). A dashed blue box surrounds the ACS section, and an arrow points to it with the text "ACS Server Configuration".

At the bottom left of the page, the text "AddPo" is partially visible.

TR-069 Service Configuration (Smart Web)

Local HTTP Server for ACS Server Access

The screenshot displays two sections of the configuration interface, both enclosed in dashed blue boxes. The top section, titled 'HTTPD', contains three input fields: 'Port' with the value '8000' and a note '(Local HTTPD Port for ACS Access , default 8000)', 'Login' with the value 'cpe' and '(optional)', and 'Password' with a masked value '*****' and '(optional)'. The bottom section, titled 'Device Information', contains three input fields: 'Model Name' with the value 'AP1850', 'Serial Number' with the value 'AP-GW-12356423', and 'OUI' with the value 'ADDPAC-0002A4'.

HTTPD	
Port	<input type="text" value="8000"/> (Local HTTPD Port for ACS Access , default 8000)
Login	<input type="text" value="cpe"/> (optional)
Password	<input type="password" value="*****"/> (optional)

Device Information	
Model Name	<input type="text" value="AP1850"/>
Serial Number	<input type="text" value="AP-GW-12356423"/>
OUI	<input type="text" value="ADDPAC-0002A4"/>

Modify CPE Information (SN, OUI)

Supported Operation

Message	Description
GetParameterNames	Used to retrieve list of supported parameters from the device.
GetParameterValues	Retrieve current value of the parameters identified by keys. Could be used to retrieve one or multiple parameters at once. The version of the call with object as the key allows for retrieval of all of the parameters associated with that object
SetParameterValues	Sets the value of one or multiple parameters
GetParameterAttributes	Retrieves attributes of one or multiple parameters
SetParameterAttributes	Sets attributes of one or multiple parameters
Download	Orders CPE to download the file specified by URL and use it (depending on specified file type) as a Firmware Image, Configuration File, Ringer file, etc.
Upload	Orders CPE to upload specified file type to the specified destination. This could cover, for example, the current configuration file or log files.
AddObject	Adds new instance to an object
DeleteObject	Removes instance from an object

Tested High-Level Operation

- Service Re-establishment
 - ✓ Device restart
 - ✓ ACS request
- Firmware / Config Download
 - apos.bin
 - apos.cfg
- Upload
 - Event
 - Configuration (apos.cfg)
- Reboot
- Factory Reset

Firmware / Configuration Download

- Download via HTTP
- Download Argument
 - FileType :
 - “1 Firmware Upgrade Image” → APOS Download
 - “3 Vendor Configuration File” → Configuration Download
 - URL
 - Specify the download file location
 - TargetFileName
 - Filename of APOS Firmware



Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail sales@addpac.com