AddPac Technology Gatekeeper Performance

2003.11

AddPac Technology

R & D Center



Contents

- ☐ Gkburst GateKeeper burstness test.
- ☐ Gkgen GateKeeper periodic load test.
- Discussion



- This program can measures the burstness of the gatekeeper call handling ability.
- ☐ This program reports the number of RRQ messages per seconds by sending a lot of RRQ messages to gatekeeper within very short time.
- □ This program reports the number of ARQ messages per seconds by sending a lot of ARQ messages to gatekeeper within very short time.


Gkburst - Usage

☐ % gkburst –gk 172.16.1.10 –n 1000


√Above command shows that gatekeeper address is 172.16.1.10 and the iteration number of RRQs, ARQs call load generation messages is one thousand(1000)


✓In Pentium III 800 MHz Linux based PC environment (minimum requirement), 1000 RRQ messages can send to Embedded Gatekeeper within 1 second from PC.

- √RCF messages from Gatekeeper is measured.
- ✓ Next, 1000 ARQ messages are sent to Gatekeeper within 1 second.
- ✓ ACF messages from Gatekeeper is measured.



Gkburst - Test Environment

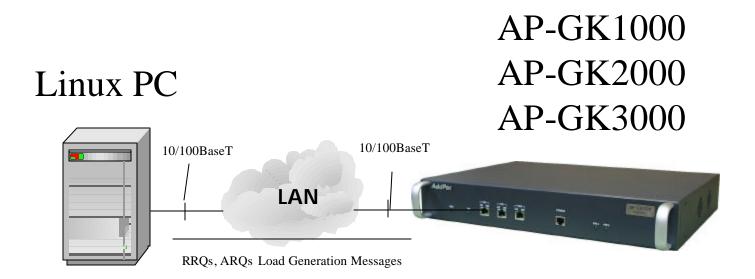



Gkburst - Test Scenario

LAN

Gkburst Program
On Linux PC


AddPac Embedded
GateKeeper

Send multiple RRQs with burst.

Receives RCFs with delay.

Send multiple ARQs with burst.

Receives ACFs with delay.





Gkburst – Test Result

- ☐ **GK1000**
 - ✓ Send 200 RRQs and 200 ARQs
 - √ 10 RRQ/sec
 - √ 10 ARQ/sec
- ☐ GK2000
 - ✓ Send 1000 RRQs and 1000 ARQs
 - √ 83 RRQ/sec
 - √ 83 ARQ/sec
- ☐ **GK3000**
 - ✓ Send 1000 RRQs and 1000 ARQs
 - √ 166 RRQ/sec
 - √ 166 ARQ/sec




- □ This program measures maximum number of endpoints and maximum concurrent calls which can be supported by a gatekeeper.
- ☐ Single Gkgen process can register 1000 endpoints with 2000 aliases.
- ☐ After register endpoints, single Gkgen process generate 1000 ARQs and DRQs periodically.
- ☐ To measure more than 1000 endpoints performance, multiple Gkgen process can be running on a Linux station or multiple Linux stations.




Gkgen - Usage

- □ % gkgen -gk 172.16.1.10 -n 1000 -b 1000 -arq- 2
 −ttl 120
 - ✓ -gk: gatekeeper IP address
 - √ -n: number of endpoints and calls to generate
 - ✓ -b: base number for distinguishing multiple
 Gkgen processes
 - ✓ -ttl: Time to live timer value.
 - √ -arq-: number of TTL period per one call





Gkgen - Test Scenario

Gkgen Program On Linux PC		AddPac Embedded GateKeeper
Phase 1 : Registration phase	RRQ	
Sends N RRQs and receives N RCFs.	RCF	
Phase 2 : Call generation periodically with periodic TTL registration.	RRQ	
	RCF	
	ARQ	
	ACF	
Sends N ARQs and		
DRQs with RRQs.	RRQ	
	RCF	
	DRQ	
	DCF	




Gkgen - Test Configuration

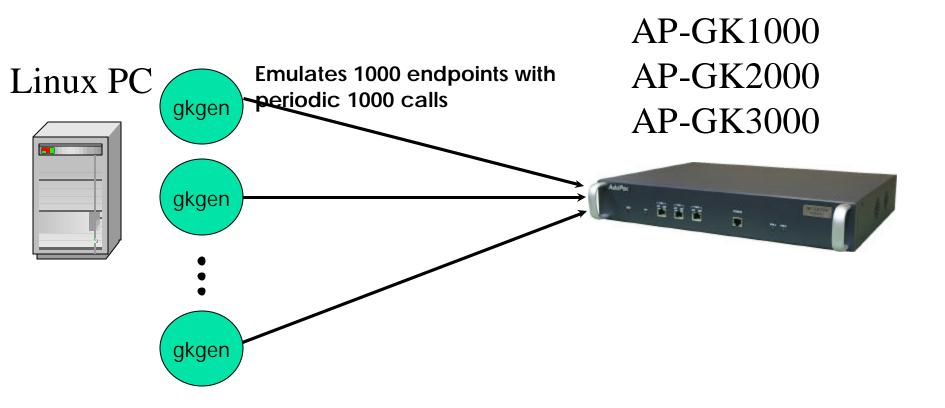



Gkgen – Test Result

- □ Condition : TTL = 60 sec, Call period is 120 sec
- □ **GK1000**
 - GK CPU load : Max 80%
 - 200 endpoints, 400 aliases, 200 concurrent calls
- **□ GK2000**
 - GK CPU load : Max 80%
 - 1500 endpoints, 3000 aliases, 1500 concurrent calls
- □GK3000
 - GK CPU load : Max 100%
 - 5000 endpoints, 10000 aliases, 5000 concurrent calls



Discussion

