AP-SNR1016™ Network DVR

High-performance Network DVR Solution



SNR1016 OSD Menu

AddPac

AddPac Technology

2009, Sales and Marketing

Contents

- DVR Viewer
  - Popup Menu
  - Media Information
  - Full Screen
- OSD Menu Tree
- Main/Sub Menu
- Main Menu Configuration/Submenu List
- Sub Menu Examples
- Remote Controller

DVR Viewer (HDTV or LCD Monitor)





or Mouse Scroll





Support Remote Controller & USB Mouse

Popup Menu





F4 or Select

F2 or Right Click

PTZ





Popup Menu (Easy Menu)



Menu Item	Remarks
Full Screen	Toggle
Sync Playback	Move To Sync
Live Info	Show Info
Audio Broadcast	On/Off Toggle(1 ch)
Audio Broad To All	On/Off Toggle(all)
Audio	Audio Play Toggle
Change Layout	Rotation(1,4,9,…)
Lock Off	TBD
Snapshot	Select Window/Screen then press O.K
Close	Close Popup Menu

Media Information



Information	Remarks
Video Codec	MPEG4/H.264
Audio Code	G.711U
Image Size	640x480(D1) 640x240(Half D1) 320x240(CIF)
Bit Rate	1024/768/512/384 256/128 kbps
Frame Rate	30/25/20/15/10/5 On archive channel play speed will be shown 16x/8x/4x/2x/1x/0.5x

※ IP Camera model dependant

Full Screen





F1

(Full Screen)

On Live Channel

F1

(Full Screen)

On Archive Play



OSD Menu Tree

- Camera
  - 1.1 Camera List
  - 1.2 New Camera
  - 1.3 New Group
  - 1.4 New Sequence
- Displayer
  - 2.1 Displayer List
  - 2.2 Archive List
  - 2.3 New Displayer
- User & Group
  - 3.1 User List
  - 3.2 Group List
  - 3.3 New User
  - 3.4 New Group
- System
  - 4.1 Viewer List
  - 4.2 Manager List
  - 4.3 Config
  - 4.4 Monitoring
  - 4.5 Live Session
  - 4.6 Play Session
  - 4.7 Recording Session
  - 4.8 Sequence Session
- Tool Box
  - 5.1 Date & Time
  - 5.2 Save All
  - 5.3 Factory Default
  - 5.4 Information
  - 5.5 Language Setup
- AV Setup
  - 6.1 Volume
  - 6.2 Display
- Network
  - 7.1 Internet Setup
  - 7.2 Network Status
  - 7.3 Auto Upgrade
- Applications
  - 8.1 SnapShot Setup
  - 8.2 Mouse Setup
  - 8.3 USB Backup

Main/Sub Menu

- Main Menu Configuration
  - Camera Submenu
  - Displayer Submenu
  - User & Group Submenu
  - System Submenu
  - Tool Box Submenu
  - AV Setup Submenu
  - Network Submenu
  - Applications Submenu

Main Menu Configuration



Camera Submenu



Sub Menu	Remarks
New Sequence	Make New Sequence Camera
Camera List	View Camera List & Modify Property
New Camera	Make New Camera
New Group	Make New Group

Displayer Submenu



Sub Menu	Remarks
New Displayer	Make New Displayer
Displayer List	View Displayer List & Modify Property & Allocate New Channel
Archive List	View Archive List & Handling

User & Group Submenu



Sub Menu	Remarks
New Group	Make New Group
User List	View User List & Modify Property
Group List	View Group List & Modify Property
New User	Make New User

System Submenu



Sub Menu	Remarks	Sub Menu	Remarks
Recording Session	View Recording Session List & Handling	**Config**	View/Configure DVR Server Setting
Sequence Session	View Sequence Session List & Handling	**Monitoring**	Monitor System Resources CPU/Memory/HDD utilization
View List	View Viewer List (SDV)	**Live Session**	View Live Session List & Handling
Manager List	View Manager List (SDM, SNR)	**Play Session**	View Play Session List & Handling

ToolBox Submenu



Sub Menu	Remarks
Information	Software Version/Name Information
Language	Select Language
Date & Time	Set Up Current Date & Time
Save All	Save all settings to the flash memory
Factory Default	Roll back all configuration

AV Setup Submenu



Sub Menu	Remarks
Volume	Set Default Volume Level
Display	Display Control • Brightness/Contrast/Saturation • Horizontal/Vertical Offset • Horizontal/Vertical End Offset

Network Submenu



Sub Menu	Remarks
Auto Upgrade	Auto Firmware Upgrade
Internet Setup	Choose Internet Option • DHCP/Static etc
Network Status	View Current Network Status • Protocol/Address etc

Application Submenu



Sub Menu	Remarks
Mouse Setup	Enable/Disable, Speed (Sensitivity)
USB Backup	Internet Setup • DHCP/Static etc
Snapshot Setup	Save Path, Format (currently BMP only)

Submenu List

- Camera Submenu
- Displayer Submenu
- User & Group Submenu
- System Submenu
- Tool Box Submenu
- AV Setup Submenu
- Network Submenu
- Applications Submenu

Camera Submenu Example



Camera Submenu Example

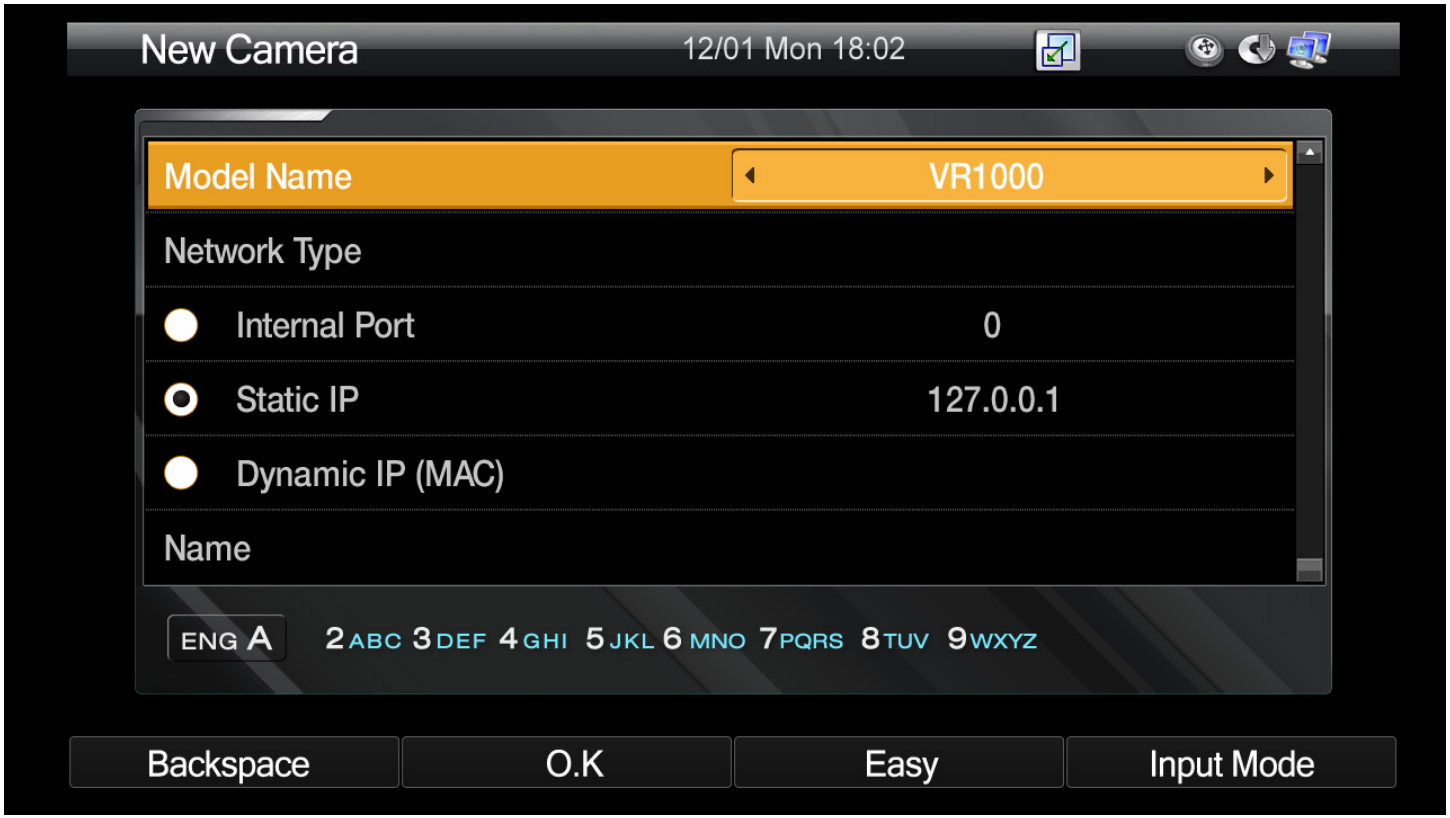

Camera Submenu Example

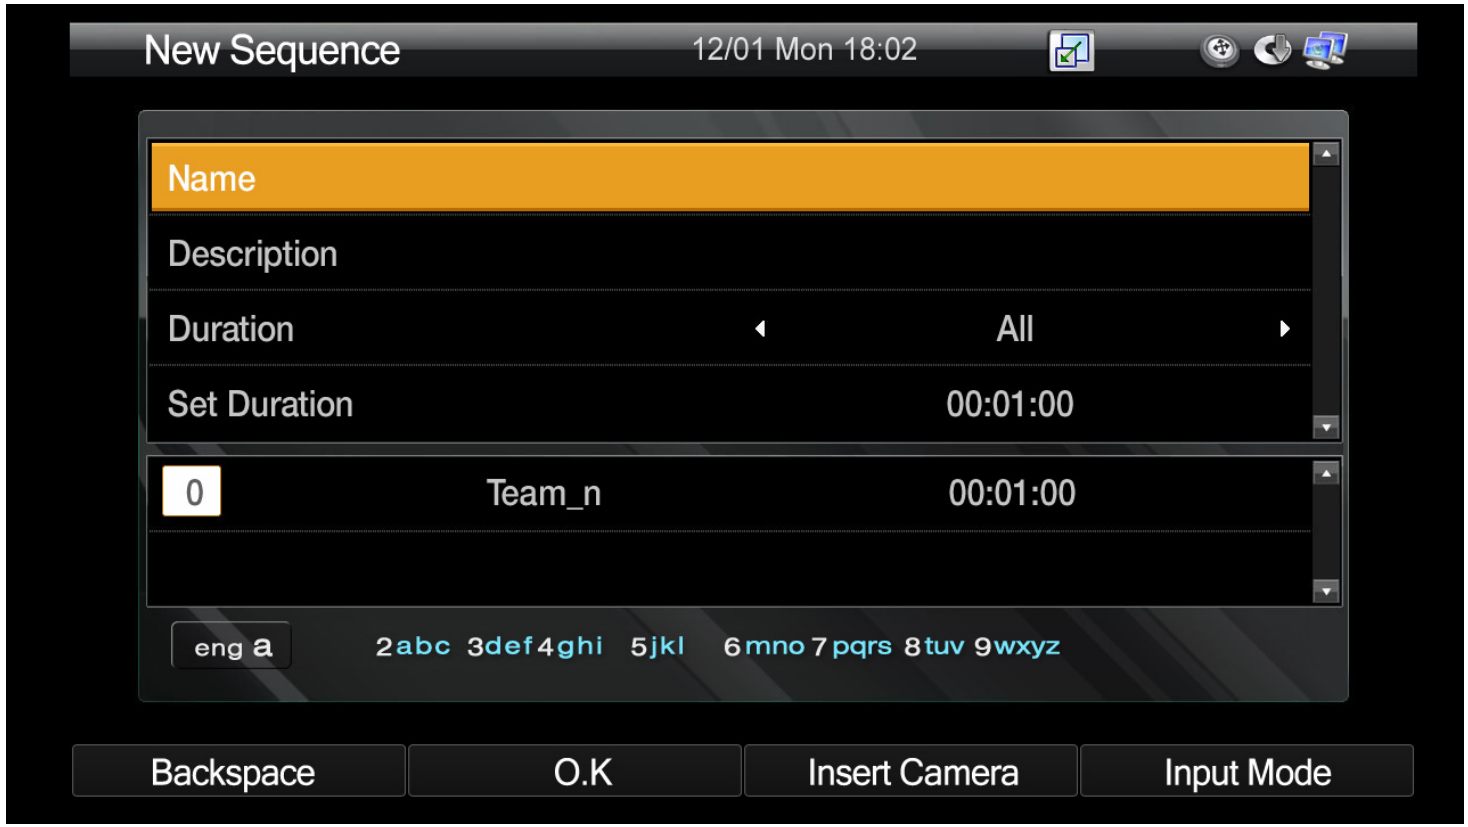

Camera Submenu Example

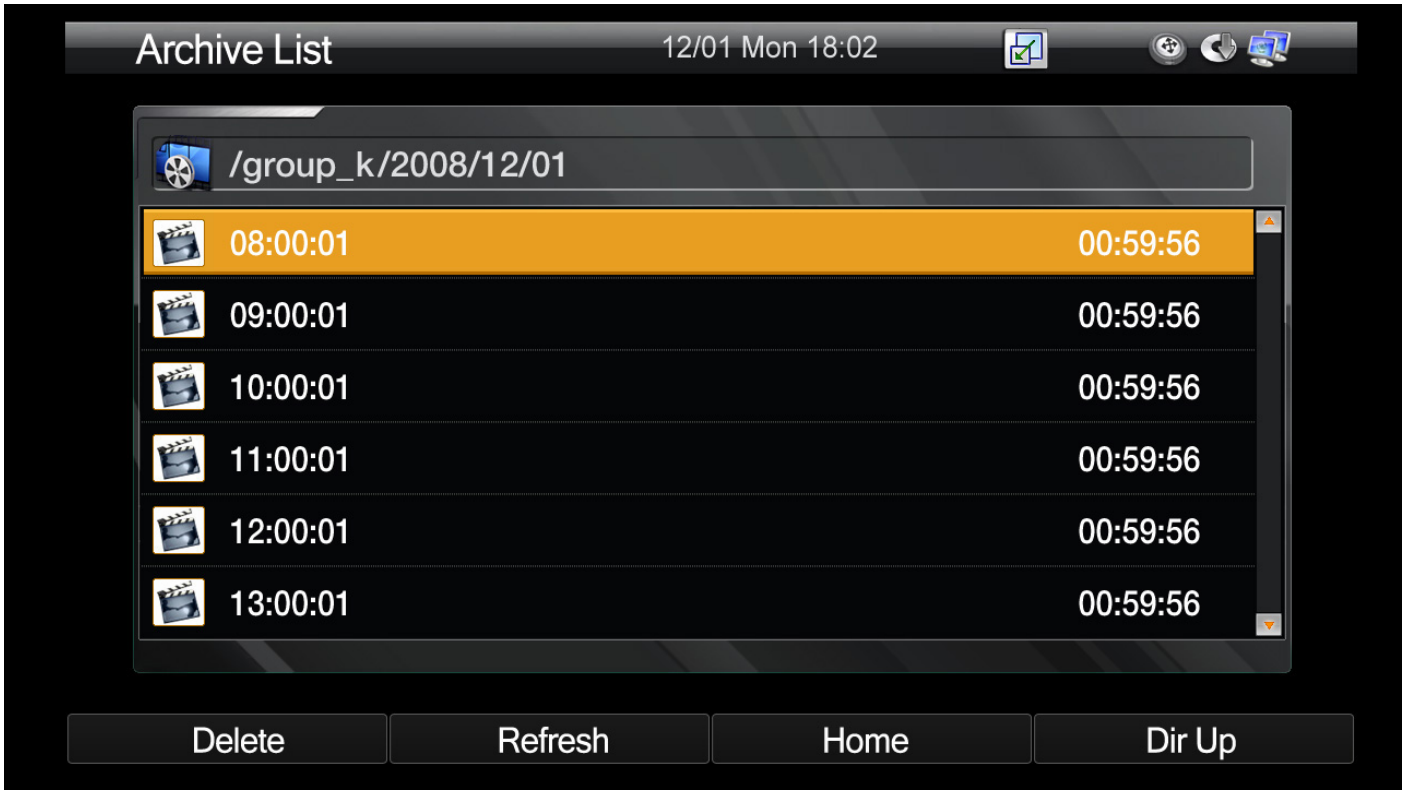

Displayer Submenu Example



User & Group Submenu Example

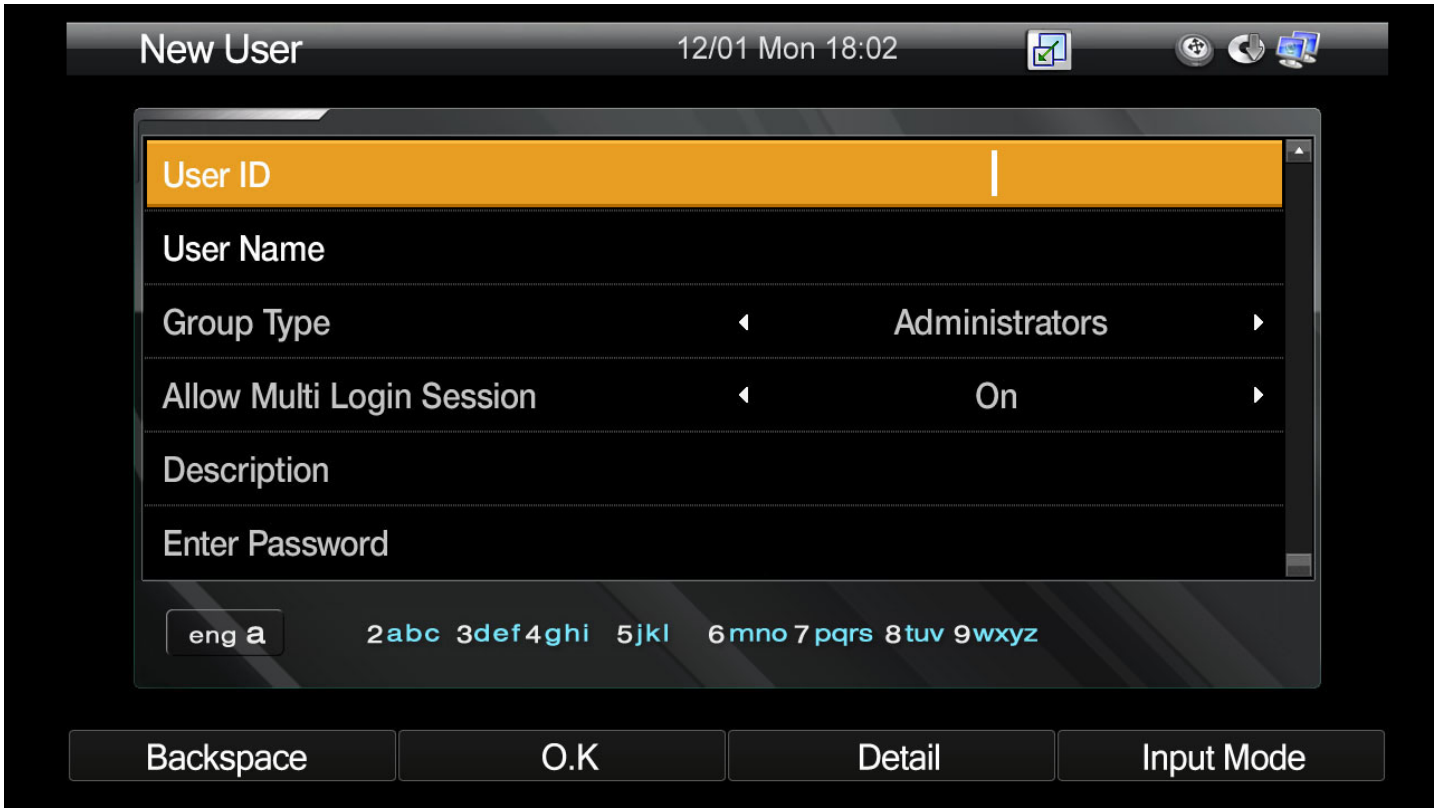

User & Group Submenu Example

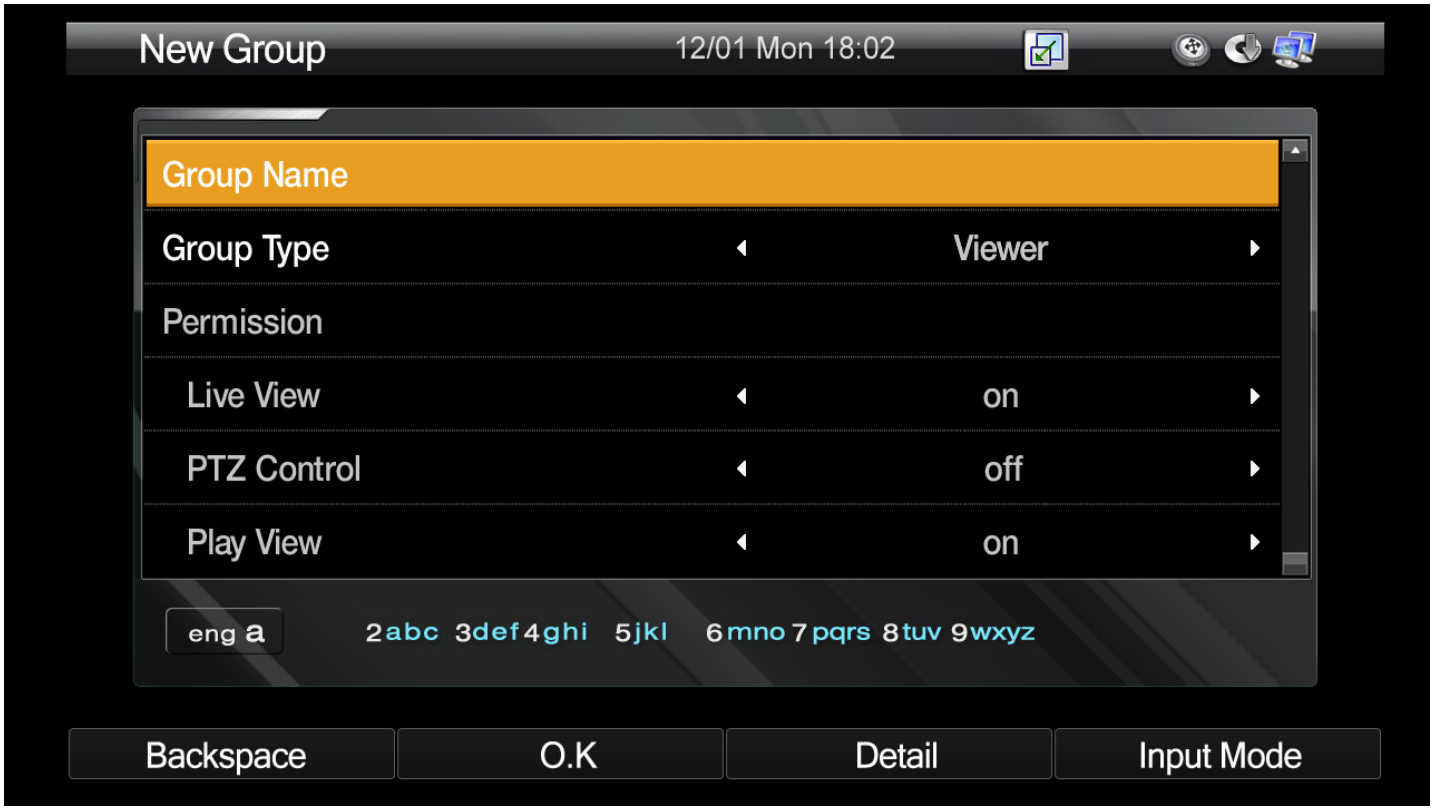

System Submenu Example

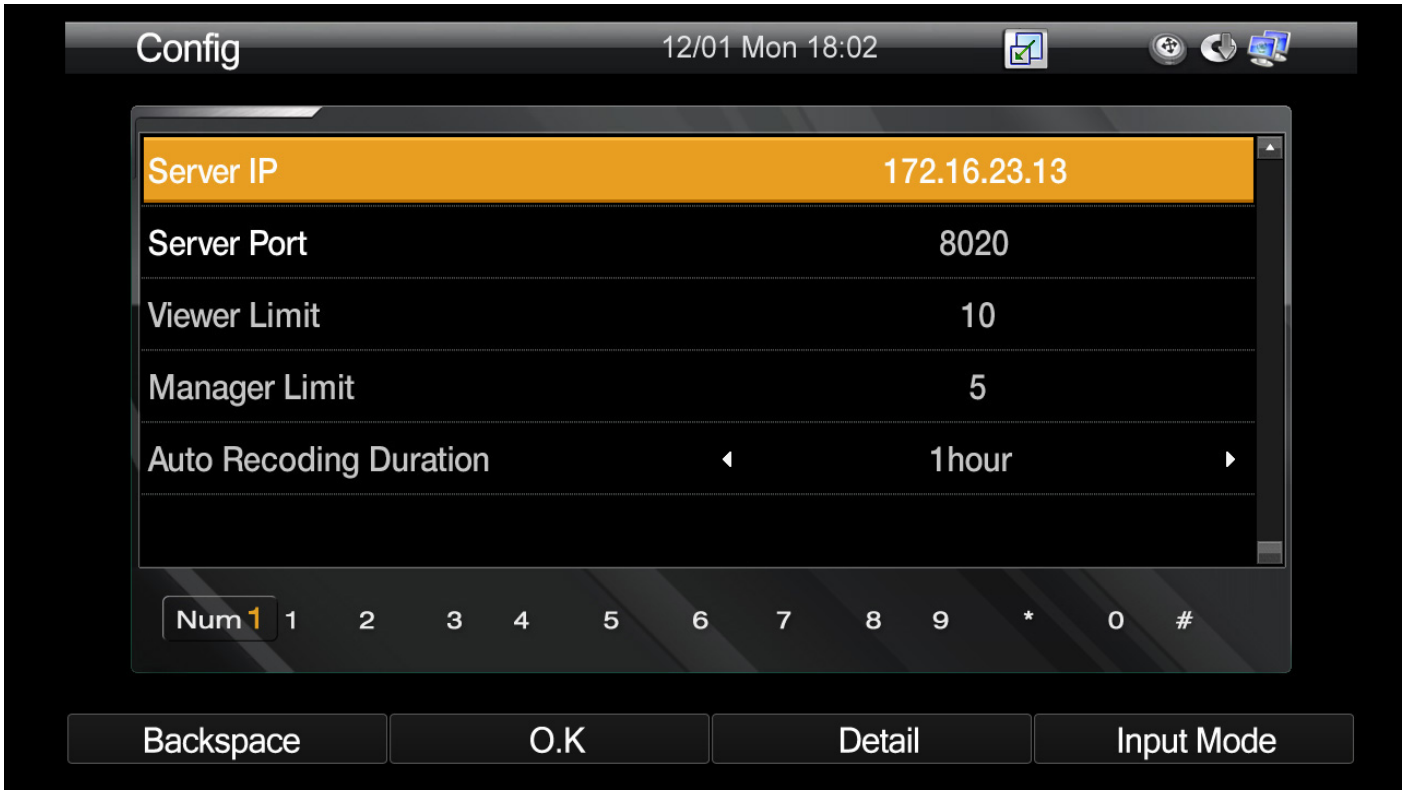

System Submenu Example

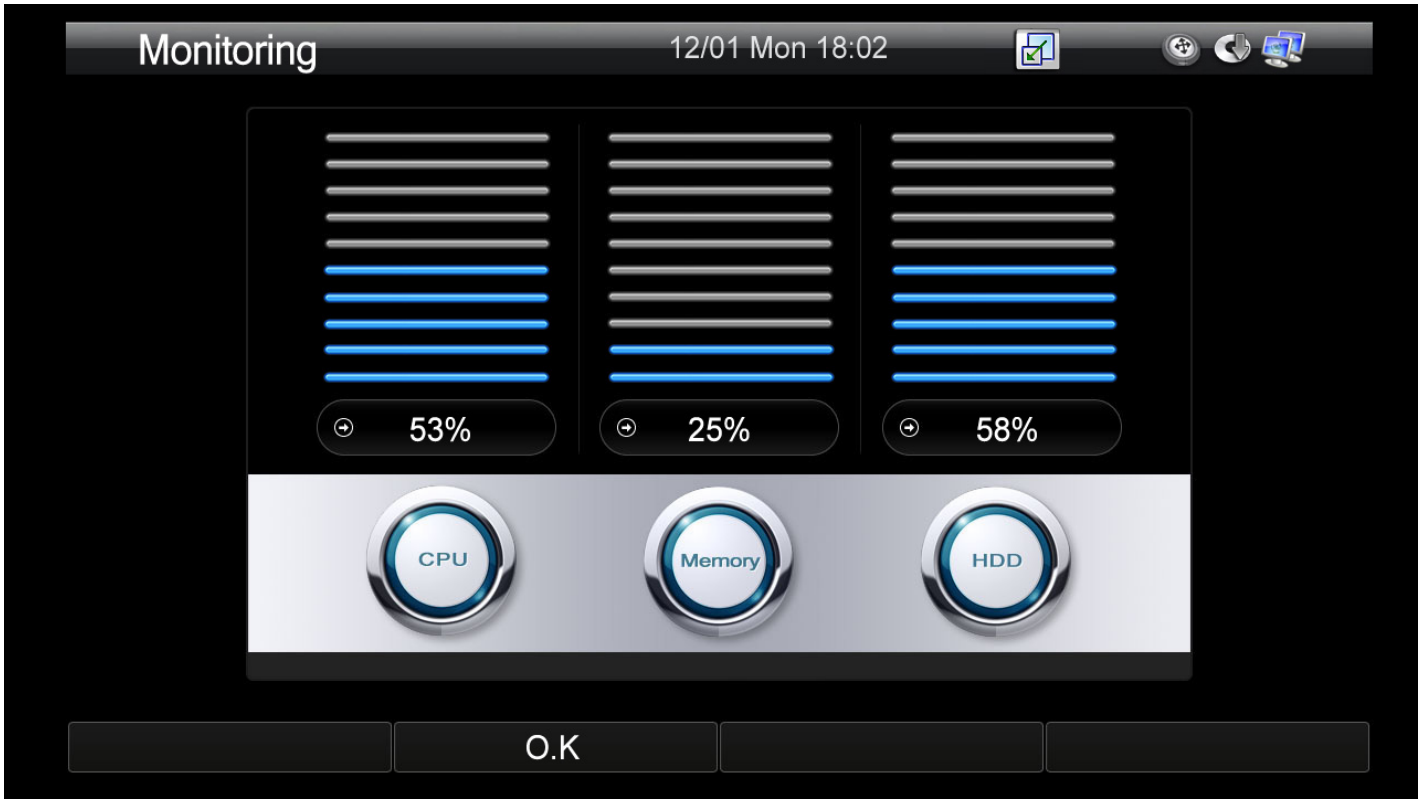

System Submenu Example



System Submenu Example



A/V Setup Submenu Example



Network Submenu Example



Network Submenu Example

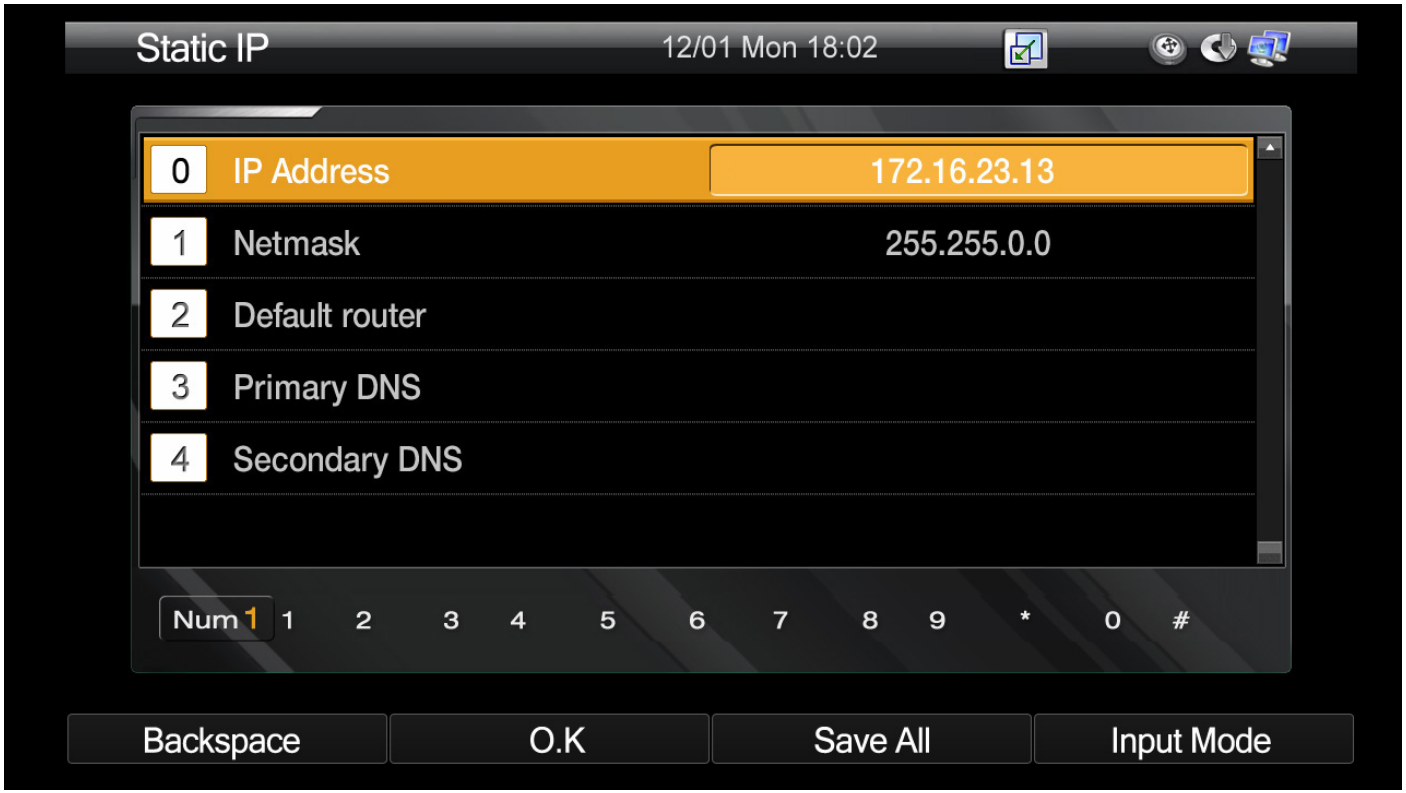

Application Submenu Example

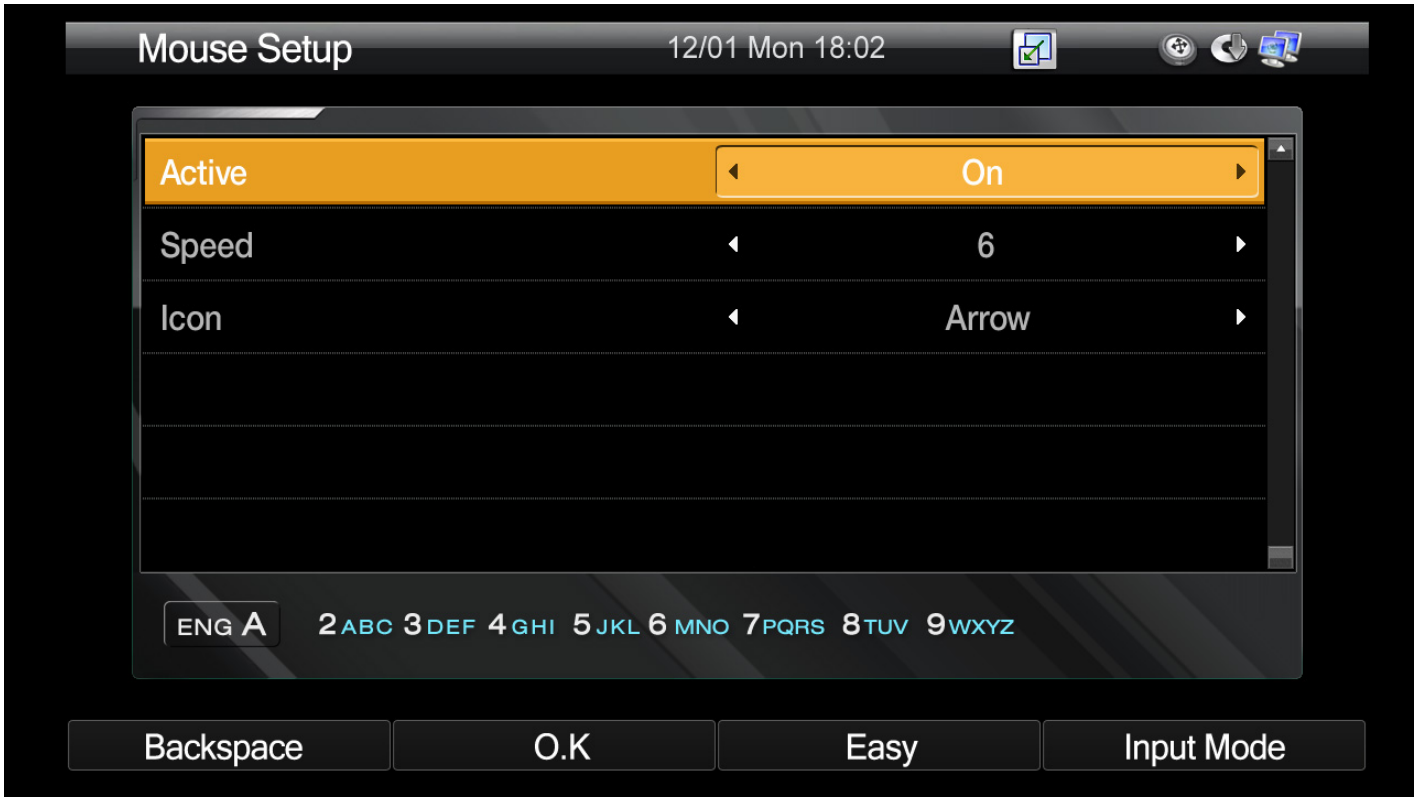

Application Submenu Example

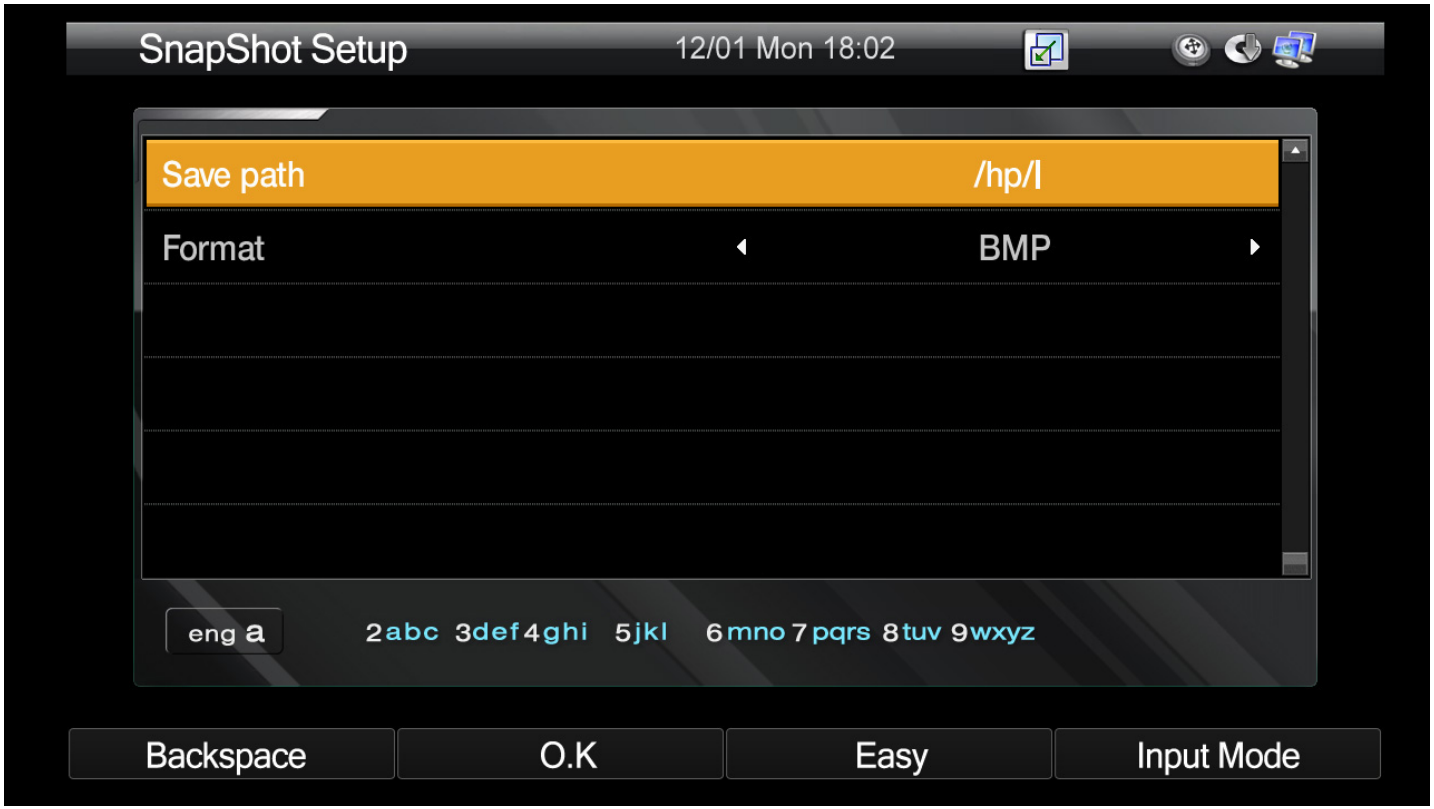

Application Submenu Example

1. USB Backup/Make Filter : Begin Date



2. USB Backup/Make Filter : End Date



3. USB Backup/Make Filter : Select Camera



4. USB Backup/Make Filter : Filter List & Handling



Application Submenu Example

USB Backup is On The Way

Status Icon is Activated

USB Backup is Completed Or Not Started

Status Icon is NOT Activated

5. USB Backup/Burn : Recording Status



6. USB Backup/Burn : Recording Successfully Completed



Remote Controller



Power On/Off

PTZ On/Off

CAM	Camera List Menu
ARCH	Archive List Menu
DISP	Display Property
NTSC	TBD

Layout	Display Layout Menu
Mute	Audio On/Off
Mic	Mic On/Off
Snapshot	Make Snapshot Image

Vol	Volume Up/Down
Zoom	Zoom In/Out on PTZ
Page/Speed	Menu Movement Play Speed on Archive

Information Bar On/Off

Menu On/Off

OK	Select Menu/Item Confirm To Any Query
Arrow	Move Menu Item Pan/Tilt on PTZ Select Channel on Viewer

Exit One Step of Menu

Play	Play Archive
Pause	Pause Play
Stop	Stop Play
Record	Record Current Channel
Prev	TBD
FR	Fast Rewind
FF	Fast Forward
Next	TBD

Move To DVR Viewer(In Any State)

Turn Off Current Mode(ex> PTZ)

Function Key

- Match To Each Function Bar Item

Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)
FAX +82.2.568.3847 (KOREA)
E-mail sales@addpac.com