


# AP-TAS300N

## Time and Attendance IP Video Door Phone

High Performance Fingerprint Recognition Time and Attendance IP Video Door Phone Solution



### Smart Web Manager

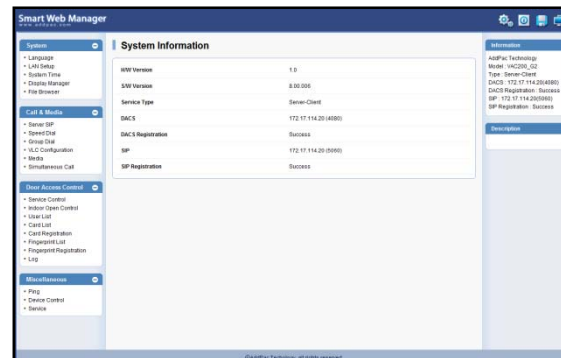

**AddPac**

**AddPac Technology**

2014, Sales and Marketing


# Contents

- Network Diagram
- Smart Web Manager
  - Main Screen
  - SYSTEM
    - Language, LAN Setup, System time, Display Manager, File Browser
  - Call & Media
    - Server SIP, Speed Dial, Group Dial, VLC Configuration, Media
  - Door Access Control
    - Service Control, Indoor Open Control, User List Card List, Card Registration, Fingerprint List, Fingerprint Registration, Log
  - Miscellaneous
    - Ping, Device Control, Service



# Network Diagram

## Integrated Door Access Control and Call Control

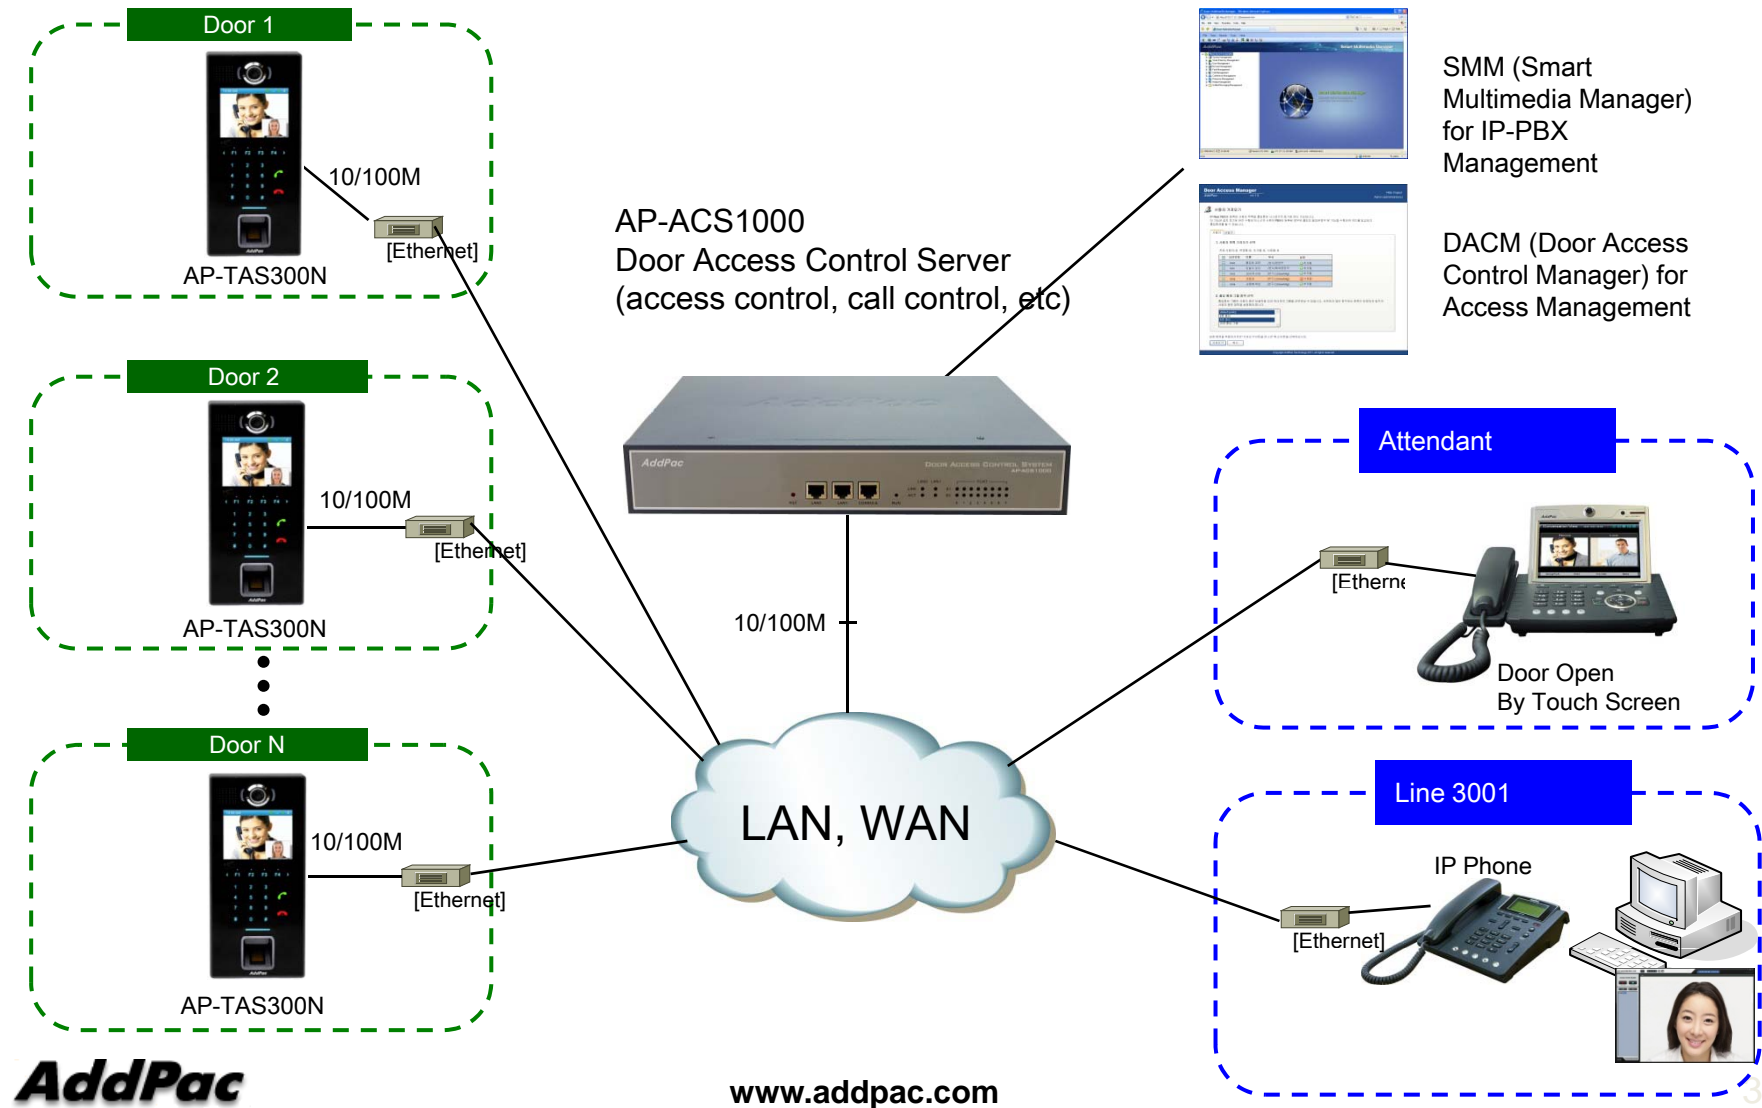



# Smart Web Manager

# Smart Web Manager

## System Information (Main Screen)

The screenshot shows the Smart Web Manager interface with the following components:

- Main Menu:** A sidebar menu on the left containing categories like System, Call & Media, Door Access Control, and Miscellaneous.
- Work Space:** The central area displaying system information in a table.
- Tool Bar:** A top-right bar with icons for settings, help, backup, and other tools.
- Information:** A panel on the right showing system details like model, type, and registration status.
- Description:** A panel on the right showing a help message.

H/W Version	1.0
S/W Version	8.00.006
Service Type	Server-Client
DACS	172.17.114.20 (4080)
DACS Registration	Success
SIP	172.17.114.20 (5060)
SIP Registration	Success

**Work Space**  
Display the AP-VAC200 system information like as H/W, S/W Version, SIP Registration Status, etc

**Tool Bar**  
Provide frequently used tool like ac System Update, Configuration backup, Initialization, Restart, Telnet

**Information**  
Display the Current system version and status summary

**Description**  
Display the help message if you move mouse over main menu

**Main Menu**  
For easy system setup, Provide the various menu and category

©AddPac Technology. all rights reserved.

# Smart Web Manager

## System - Language

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Configure Language**

Korean

English

Apply

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Choose the basic language to be applied. English is set at default.

**Configuration Language**  
Korean, English

Currently we just support two language only, but we can implement some specific language according to customer requirement

# Smart Web Manager

## System – LAN Setup

**System**

- Language
- LAN Setup**
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

### LAN Setup

LAN Setup

Hostname

IP Address  A.B.C.D

Network Mask  A.B.C.D

Default Router  A.B.C.D

**Static IP**

DNS Server  Primary DNS Server

Secondary DNS Server

DHCP

VLAN ID

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

This command sets up LAN port. The static IP address is to be assigned from the service provider and you can enter the assigned IP address. For DHCP, the IP address of the device can be changed. MAC Address change can be used only when necessary. It is recommended to use the address created by the user not the address of the device

**Host Name**  
Create a representative name for the site to be installed

**Static IP**  
This is Static IP Mode. Specify the addressed IP from the service provider

**DHCP**  
This is Dynamic IP mode which is set at default. The IP can addressed from the external DHCP server.

**VLAN**  
Configure VLAN mode and ID.

# Smart Web Manager

## System – System time

**Smart Web Manager**  
www.addpac.com

**System Time**

System Time ⓘ 5 Month 16 Day 2013 Year 13 Hour 13 Minute 24 Second

✓ Apply ✓ DACS Synchronize

**System Time**  
Current time setting  
Support DACS(Door Access Control Server) Server and Synchronize

**Information**  
AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**  
Setting the device time



# Smart Web Manager

## System – Display Manager(1)

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager**
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

**Display Manager**

Wallpaper

Directory : /home2/image/

Image	Name	Size	Last Modified	Sequence	Duration
	main_kr_green.jpg	83.0K	2013-Mar-25 07:41:02	2	0
	main_green.jpg	82.5K	2013-Mar-25 07:41:02	2	0

Apply

**Font & Output Message**

Font File

**Wall Paper**  
Display Image on Idle Screen , Images are able to set

Name	Size	Last Modified
NanumPen.ttf	3.3M	2013-Apr-17 14:13:08
NanumMyeongjoExtraBold.ttf	4.5M	2013-Apr-17 14:13:06
NanumMyeongjoBold.ttf	4.4M	2013-Apr-17 14:13:03
NanumMyeongjo.ttf	3.6M	2013-Apr-17 14:13:00
NanumGothicExtraBold.ttf	3.9M	2013-Apr-17 14:12:57
NanumGothicBold.ttf	4.0M	2013-Apr-17 14:12:55
NanumGothic.ttf	4.1M	2013-Apr-17 14:12:52
NanumBrush.ttf	3.5M	2013-Apr-17 14:12:49

Output Message File

Message File Directory : /home2/fonts/

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Setup device Invitation  
Message, Font, Menu Entrance  
Password

# Smart Web Manager

## System – Display Manager(2)

The screenshot displays the 'Font & Output Message' configuration page. On the left, there is a sidebar menu with sections: 'Simultaneous Call', 'Door Access Control' (containing Service Control, Indoor Open Control, User List, Card List, Card Registration, Fingerprint List, Fingerprint Registration, and Log), and 'Miscellaneous' (containing Ping, Device Control, and Service). The main content area is divided into two sections: 'Font File' and 'Output Message File'. Both sections feature a table with columns for Name, Size, and Last Modified. The 'Font File' section lists various font files like NanumPen.ttf and NanumGothicExtraBold.ttf. The 'Output Message File' section lists korean.bt, english.bt, and System(English). Below each table is an 'Apply' button. A 'Menu Entrance Password' section at the bottom includes input fields for 'Password' and 'Confirm Password', also with an 'Apply' button. Two yellow callout boxes highlight the 'Font & Output Message Display Setup for Font / Message' and 'Menu Entrance password Support Menu Lock function with Password'.

**Font & Output Message**  
Display Setup for Font / Message

**Menu Entrance password**  
Support Menu Lock function with Password

Font File			Font File Directory : /home2/fonts/
	Name	Size	Last Modified
<input type="radio"/>	NanumPen.ttf	3.3M	2013-Apr-17 14:13:08
<input type="radio"/>	NanumMyeongjoExtraBold.ttf	4.5M	2013-Apr-17 14:13:06
<input type="radio"/>	NanumMyeongjoBold.ttf	4.4M	2013-Apr-17 14:13:03
<input type="radio"/>	NanumMyeongjo.ttf	3.6M	2013-Apr-17 14:13:00
<input type="radio"/>	NanumGothicExtraBold.ttf	3.9M	2013-Apr-17 14:12:57
<input type="radio"/>	NanumGothicBold.ttf	4.0M	2013-Apr-17 14:12:55
<input type="radio"/>	NanumGothic.ttf	4.1M	2013-Apr-17 14:12:52
<input type="radio"/>	NanumBrush.ttf	3.5M	2013-Apr-17 14:12:49

Output Message File			Message File Directory : /home2/fonts/
	Name	Size	Last Modified
<input type="radio"/>	korean.bt	1.2K	2013-Apr-17 14:12:47
<input type="radio"/>	english.bt	1.0K	2013-Apr-17 14:12:46
<input checked="" type="radio"/>	System(English)	0	-

©AddPac Technology. all rights reserved.

# Smart Web Manager

## System – File Browser

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser**

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

**File Browser**

**Index of Root/home2/**

Name	Size	Type	Last Modified
Parent Directory/		Directory	
backup/		Directory	2013-May-15 11:46:56
cfg/		Directory	2013-May-15 13:46:50
database/		Directory	2013-May-16 15:24:19
fonts/		Directory	2013-Apr-17 17:46:32
icon/		Directory	2013-Apr-17 14:13:18
image/		Directory	2013-Mar-25 07:41:02
libs/		Directory	2013-Mar-25 07:41:02
lost+found/		Directory	2013-May-16 13:58:14
run/		Directory	2013-May-10 16:49:12
system/		Directory	2013-Apr-03 00:34:49
upload/		Directory	2013-May-10 16:49:12
database_vac200.tar	40.0K		2013-Mar-25 07:42:45

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Back up / Restore the setting of the system software and device

©AddPac Technology. all rights reserved

### File Browser

Back up / Restore the setting of the system software and device

# Smart Web Manager

## Call & Media – Server SIP

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP**
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

### SIP (Session Initiation Protocol)

Use SIP Server  Yes  No

Primary SIP Server   Server address and Port (default 5060)

Secondary SIP Server   Server address and Port (default 5060)

Local Domain Name  (SIP userpart of authentication)

SIP Signaling Port  (default 5060, between 1 to 65535)

Register Expiration  (in seconds, default 60, between 10 to 86400)

Session Re-Fresh  INVITE  UPDATE

Session Expire Time  (in seconds, default 1800, between 30 to 86400, 0 = disable)

Min-SE  (in seconds, default 1800, between 30 to 86400)

Extension    User Name, Extension Number, Password

Apply

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Configure the settings for SIP.  
Contact your service provider for the settings

**SIP Server**  
Primary & Secondary Server, Local Domain Name,  
SIP Signaling Port (reboot necessary)  
Timer - Register Expire, Session Refresh, Session Expire  
Extension - User Name, Extension Number, Password

©AddPac Technology. all rights reserved.

# Smart Web Manager

## System – Speed Dial

Smart Web Manager  
www.addpac.com

System

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

Call & Media

- Server SIP
- Speed Dial**
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

Door Access Control

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

Miscellaneous

- Ping
- Device Control
- Service

### Speed Dial

Directory : /home2/login/

No.	Text	Dial	Image
1			Default Image
2			Default Image
3			Default Image
4			Default Image
5			Default Image
6			Default Image
7			Default Image
8			Default Image
9			Default Image
0			Default Image

Speed Button Type

List  Table

Apply

**Speed Dial**  
Able to use Speed Dial on Menu Screen  
Text, Dial, Image Type  
Speed Button Type – List, Table(Button Map)

Information

AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

Description

Setup speed dial image, user, dial.

©AddPac Technology. all rights reserved.

# Smart Web Manager

## Call & Media – Group Dial

The screenshot displays the Smart Web Manager interface for configuring Group Dial. The main content area features a table with the following structure:

No.	Group Number	Primary Number	Add/Delete
1	<input type="text"/>	<input type="text"/>	<input type="button" value="Add"/>

A yellow callout box highlights the table with the text: "Group Dial Primary Dial configuration according to Group Dial."

The right-hand panel contains the following information:

- Information**
  - AddPac Technology
  - Model : VAC200\_G2
  - Type : Server-Client
  - DACS : 172.17.114.20(4080)
  - DACS Registration : Success
  - SIP : 172.17.114.20(5060)
  - SIP Registration : Success
- Description**
  - Primary Dial configuration according to Group Dial.

# Smart Web Manager

## Call & Media – VLC Configuration

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

### VLC Configuration

No.	Called-Number	IP Address	Port
1	2000	172.17.1.115	554
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : Server-Client  
DACS : 172.17.114.20(4080)  
DACS Registration : Success  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Setup VLC IP Address and Port.

**VLC Configuration**  
Setup VLC IP Address and Port.

# Smart Web Manager

## Call & Media – Media(1)

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

**Media**

**Camera**

Brightness: - [Slider] + [0] (default 0, between 0-127)

Contrast: - [Slider] + [32] (default 48, between 0-127)

Exposure: - [Slider] + [8] (default 672, between 0-767, auto 0)

Flicker:  50 HZ  60 HZ(default)

Apply

**Audio Gain**

Input: - [Slider] + [20] (default 20, between 0-31)

Output: - [Slider] + [58] (default 58, between 0-63)

Ring: - [Slider] + [38] (default 38, between 0-63)

DTMF digit: - [Slider] + [3] (default 3, between 0-63)

Tone: - [Slider] + [10] (default 10, between 0-63)

Apply

**Audio I/O**

Input:  Mic  Line

Output:  Both  Speaker  Line

Apply

**Information**

**Camera**  
Adjust camera brightness, Contrast and exposure

**Description**  
Change media device setup information.

**Audio Gain**  
Adjust Gain.  
Audio Input, Output, Ring, DTMP digit and tone output

**Audio I/O**  
Audio I/O configuration.  
Audio Input / Output Port



# Smart Web Manager

## Call & Media – Media(2)

• Group Dial  
• VLC Configuration  
• **Media**  
• Simultaneous Call

Door Access Control

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

Miscellaneous

- Ping
- Device Control
- Service

✓ Apply

**Audio Gain**

Input : - [Slider] +  (default 20, between 0-31)

Output : - [Slider] +  (default 58, between 0-63)

Ring : - [Slider] +  (default 38, between 0-63)

DTMF digit : - [Slider] +  (default 3, between 0-63)

Tone : - [Slider] +  (default 10, between 0-63)

✓ Apply

**Audio I/O**

Input  Mic  Line

Output  Both  Speaker  Line

✓ Apply

**Video Display**

Mute  Enable  Disable

✓ Apply

**Auto Answer**

Time  (in seconds, default 0, between 1-30, 0 = disable)

✓ Apply

©AddPac Technology. all rights reserved.

**Video Display**  
Setup video mute when talking with inside video phone  
If enable, peer party is not displayed

**Auto Answer**  
Setup and answer  
Setup from 1 to 30.  
Setup as 0 then auto answer will be remove

# Smart Web Manager

## Door Access Control – Service Control

**Door Access Control Service**  
Type  Server-Client  StandAlone

**Event Log**  
Log  Local  Disable

Storage Period  day(default 30, 3-90)

Max Size Configuration  (default 10000, 1000-30000)

Current Size

**Door Access Control Service**  
Setup the DACS service type : Standalone mode without DACS System(AP-ACS1000) or not

**Event Log**  
Log – Setup access control server event log.  
Storage Period – Setup access control server event log storage period  
Max Size Configuration - Setup access control server event log max Size.

**Information**  
AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**  
Setup access control server.

# Smart Web Manager

## Door Access Control – Indoor Open Control

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control**
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

### Door Open

**Feature Code**  using 0~9, #, \*

**Door Close Time**  default 2 sec, 1~180 sec

**Door Open**

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Open/Close the door remotely.

**Feature Code**  
Open the door remotely by Feature Code, for example "0"  
numeric key

**Door Close Time**  
Close Door remotely

**Door Open**  
Able to open Door using Execute button

# Smart Web Manager

## Door Access Control – User List

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List**
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

### User List

Search words:  Card:  All  Registration  Unregistration Action:

Name	Extension	Department	Card	Action
<input type="checkbox"/> TEST	1000	TEST	N	<input type="button" value="Delete"/>

Name:  Extension:  Department:  Password:  Action:

**User List**  
Register, add and delete the list of available user

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Register, add and delete the list of available user access register.

# Smart Web Manager

## Door Access Control – Card List

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List**
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

### RF Card List

Search words:  Registration:  All  Unregistration Action:

Serial Number	Extension	Name	Department	Action
				<input type="button" value="✓ Delete"/>

Serial Number:  Extension:  Action:

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

RF Card List management.

**RF Card List**  
RF Card List Management.

# Smart Web Manager

## Door Access Control – Card Registration

The screenshot displays the Smart Web Manager interface for Door Access Control. The main content area is titled "RF Card Registration" and contains a status bar with "RF Card Recognition" and "Refresh" buttons, both marked with green checkmarks. Below this is a table with the following data:

	Time	Serial Number	Status	Name	Extension
<input type="checkbox"/>	5/20/2013 13:43:23	C26E0832	new		

Below the table is a "Registration" button with a green checkmark. A red dashed box highlights the "RF Card Recognition" button, the table, and the "Registration" button. A yellow callout box points to the "Registration" button with the text: "RF Card Registration RF Card Recognition and Registration."

The left sidebar contains a menu with three sections: "System" (Language, LAN Setup, System Time, Display Manager, File Browser), "Call & Media" (Server SIP, Speed Dial, Group Dial, VLC Configuration, Media, Simultaneous Call), and "Door Access Control" (Service Control, Indoor Open Control, User List, Card List, **Card Registration**, Fingerprint List, Fingerprint Registration, Log). The "Card Registration" item is highlighted with a mouse cursor.

The right sidebar contains "Information" (AddPac Technology, Model: VAC200\_G2, Type: StandAlone, SIP: 172.17.114.20(5060), SIP Registration: Success) and "Description" (RF Card Registration).

# Smart Web Manager

## Door Access Control – Fingerprint List

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List**
- Fingerprint Registration
- Log

### Fingerprint List

Search words:  Registration:  All  Unregistration Action:

Fingerprint ID	Extension	Name	Department	Fingerprint 2
<input type="checkbox"/> 1369058338	<input type="text" value="1000"/>	TEST	TEST	<input type="button" value="✓ Unregistration"/>

Fingerprint ID:  Extension:  Action:

**Fingerprint List**  
Fingerprint List Management

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

# Smart Web Manager

## Door Access Control – Fingerprint Registration

**Smart Web Manager**  
www.addpac.com

**Fingerprint Registration**

✓ Recognition    ✓ Refresh

	Time	ID	Fingerprint 1	Fingerprint 2	Action
<input type="checkbox"/>	05/20/2013 13:58:58	1369058338	Y	Y	

✓ Registration

**Information**  
AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

**Fingerprint Registration**  
Fingerprint Recognition and Registration.



# Smart Web Manager

## Door Access Control – Log

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Log**

Access Log    Event Day    Extension    Action

2013/ 5/20    1000    Search

Time	Extension	Name	Log
5/20/2013 14: 6:20	1000	TEST	Access Allow
5/20/2013 14: 6:13	1000	TEST	Access Allow

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

check the access log.

**Log**  
Door Access Control event Log

# Smart Web Manager

## Miscellaneous – Ping

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

**Ping**

Host address:

PING 172.17.1.1 (172.17.1.1): 56 data bytes  
64 bytes from 172.17.1.1: icmp\_seq=1 ttl=255 time=0 ms  
64 bytes from 172.17.1.1: icmp\_seq=2 ttl=255 time=0 ms  
64 bytes from 172.17.1.1: icmp\_seq=3 ttl=255 time=0 ms  
64 bytes from 172.17.1.1: icmp\_seq=4 ttl=255 time=0 ms

--- 172.17.1.1 ping statistics ---  
5 packets transmitted, 4 packets received, 20% packet loss  
round-trip min/avg/max = 0/0/0 ms

**Ping**  
Verify the outgoing ping to the outside from the device by entering IP address and URL  
Verify network status of the location in where the terminal is located

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Verify the outgoing Ping to the outside from the device by entering IP address and URL  
Verify network status of the location in where the terminal is located

# Smart Web Manager

## Miscellaneous – Device Control

**Smart Web Manager**  
www.addpac.com

**System**

- Language
- LAN Setup
- System Time
- Display Manager
- File Browser

**Call & Media**

- Server SIP
- Speed Dial
- Group Dial
- VLC Configuration
- Media
- Simultaneous Call

**Door Access Control**

- Service Control
- Indoor Open Control
- User List
- Card List
- Card Registration
- Fingerprint List
- Fingerprint Registration
- Log

**Miscellaneous**

- Ping
- Device Control
- Service

**Device Control**

Sensor Input Port 0

- LCD
- Keypad

Sensor Input Port 1

- LCD
- Keypad

Apply

**Information**

AddPac Technology  
Model : VAC200\_G2  
Type : StandAlone  
SIP : 172.17.114.20(5060)  
SIP Registration : Success

**Description**

Control the device.

**Device Control**  
Check the device.  
Sensor Input Port 0 – LCD, Keyboard  
Sensor Input Port 1 – LCD, Keyboard

# Smart Web Manager

## Miscellaneous – Service

The screenshot displays the Smart Web Manager interface. The top header shows the logo and URL 'www.addpac.com'. The left sidebar contains four main categories: System, Call & Media, Door Access Control, and Miscellaneous. The 'Miscellaneous' category is expanded, showing 'Service' as the selected option. The main content area is titled 'Service' and features a red dashed box around the 'FTP Server' control, which includes radio buttons for 'Enable' (selected) and 'Disable', and an 'Apply' button. Below this, a yellow callout box contains the text: 'Device Control Configure Service. FTP Server(Default Port 21) On/Off'. The right sidebar contains two panels: 'Information' with details like 'AddPac Technology', 'Model: VAC200\_G2', 'Type: StandAlone', 'SIP: 172.17.114.20(5060)', and 'SIP Registration: Success'; and 'Description' with the text 'Configure Service.'



# Thank you!

**AddPac Technology Co., Ltd.**  
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail [sales@addpac.com](mailto:sales@addpac.com)