

Digital VoIP Gateway Active-Standby Backup Service using VRRP Protocol



AddPac

AddPac Technology

2014, Sales and Marketing

Contents

- What is VRRP Protocol?
- VRRP Protocol in VoIP Gateway Service
- Network Diagram
- Sample Configuration using Command Line Interface (CLI)


What is VRRP Protocol?

- Virtual Router Redundancy Protocol
- Originally Developed for Router System
- Described in RFC 2338
- Two types of routers; master and backup routers.
- Configure up to 255 virtual routers in a group.
- Master routers have a priority of 255 and backup routers have a priority of 1-254.

VRRP Protocol in VoIP Gateway Service

- High-Availability Solutions for VoIP Service
- Enables a pair of redundant (1+1) gateways on a LAN to negotiate ownership of a virtual IP address. One device is elected to be active and the other to be standby.
- If the active fails, the backup server takes over.

Network Diagram for VRRP

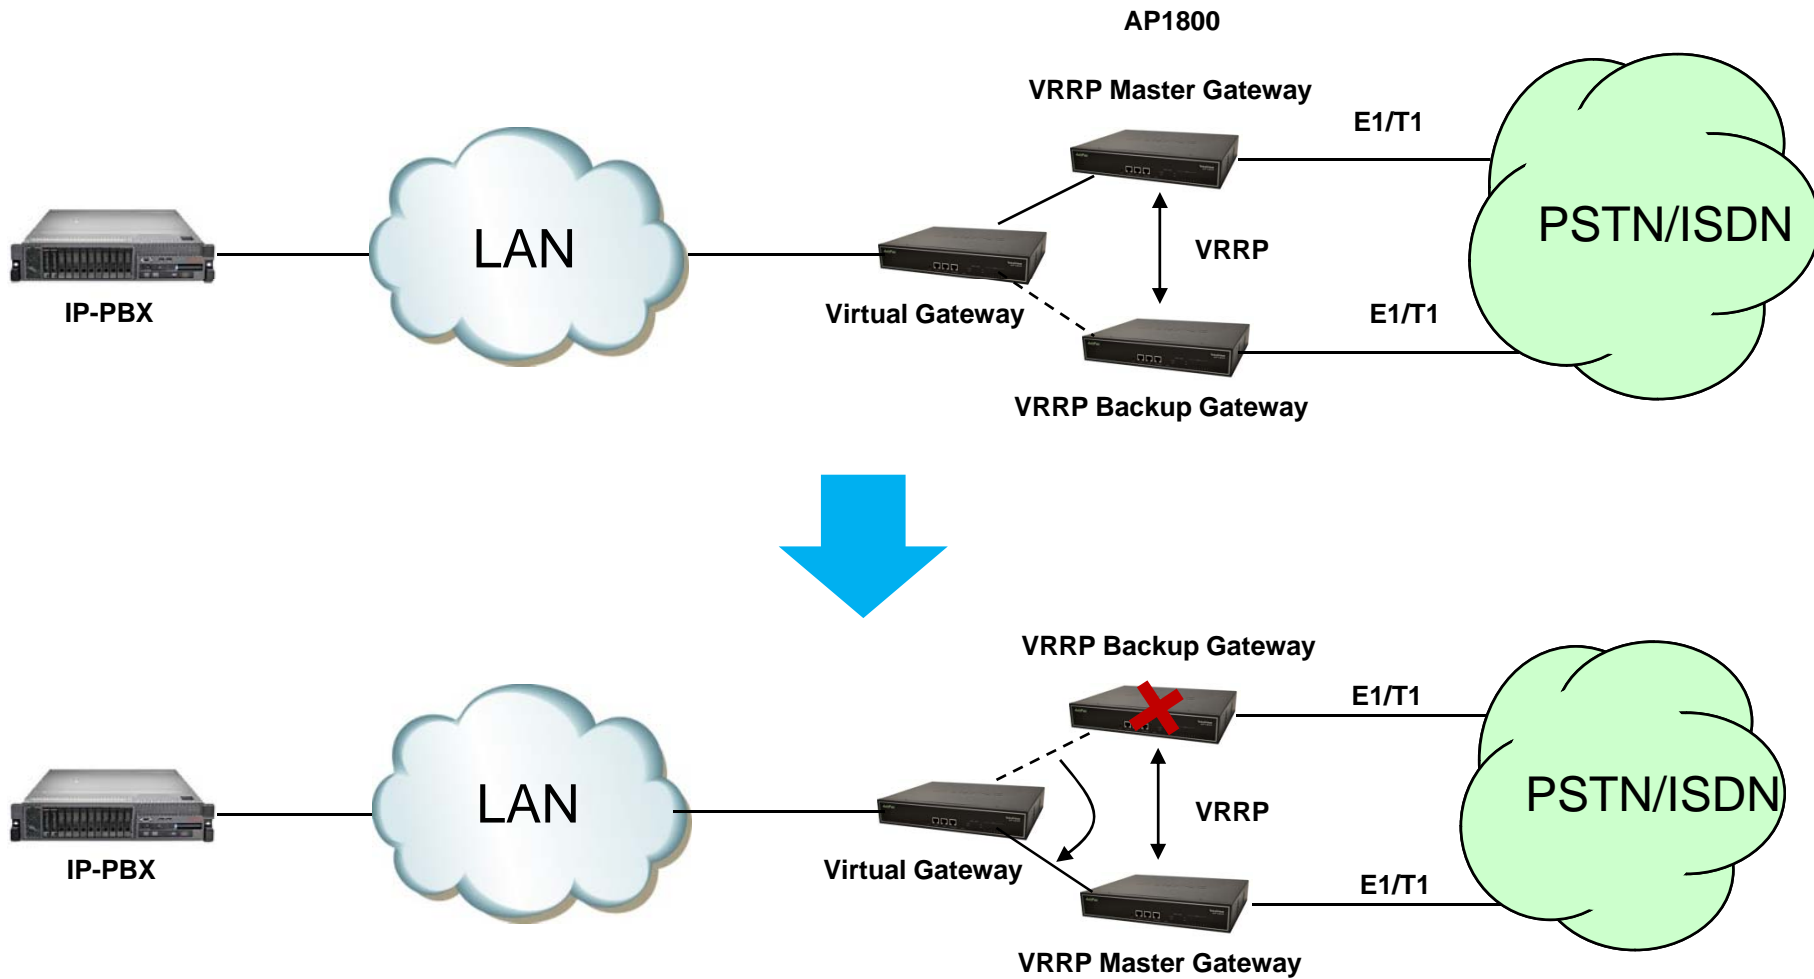

Sample Configuration (CLI)

Master Gateway

```
interface FastEthernet0/0
ip address 172.16.8.49 255.255.0.0
speed auto
vrrp 1 ip 172.16.8.1
```

Backup Gateway

```
interface FastEthernet0/0
ip address 172.16.8.48 255.255.0.0
speed auto
vrrp 1 ip 172.16.8.1
```

```
Router# show vrrp
```

```
FastEthernet0/0 vrid 1 state is Master
```

```
Advertisement Interval: 1 second(s)
```

```
Auth Type: No Authentication (0)
```

```
Priority: 100 (default backup priority)
```

```
Preempt is enabled
```

```
MAC address: use virtual address (0000.5e00.0101)
```

```
IP Address: 172.16.8.1
```

```
Router#
```



Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail sales@addpac.com