

IPNext IP-PBX Solution for SOHO



IPNext100 IP-PBX



IPNext50 IP-PBX



IPNext20 IP-PBX

AddPac

AddPac Technology


Sales and Marketing

www.addpac.com




Contents

- IPNext SOHO IP-PBX Service Diagram
- IPNext SOHO IP-PBX Comparison Table
- IPNext SOHO IP-PBX Series
 - IPNext100 IP-PBX
 - IPNext50 IP-PBX
 - IPNext20 IP-PBX
- AddPac IP Terminals, Soft Phone, Smart Messenger
- IP Video Phones for IPNext SOHO
- IP Phones for IPNext SOHO
- SMM (Smart Multimedia Manager) for IPNext SOHO

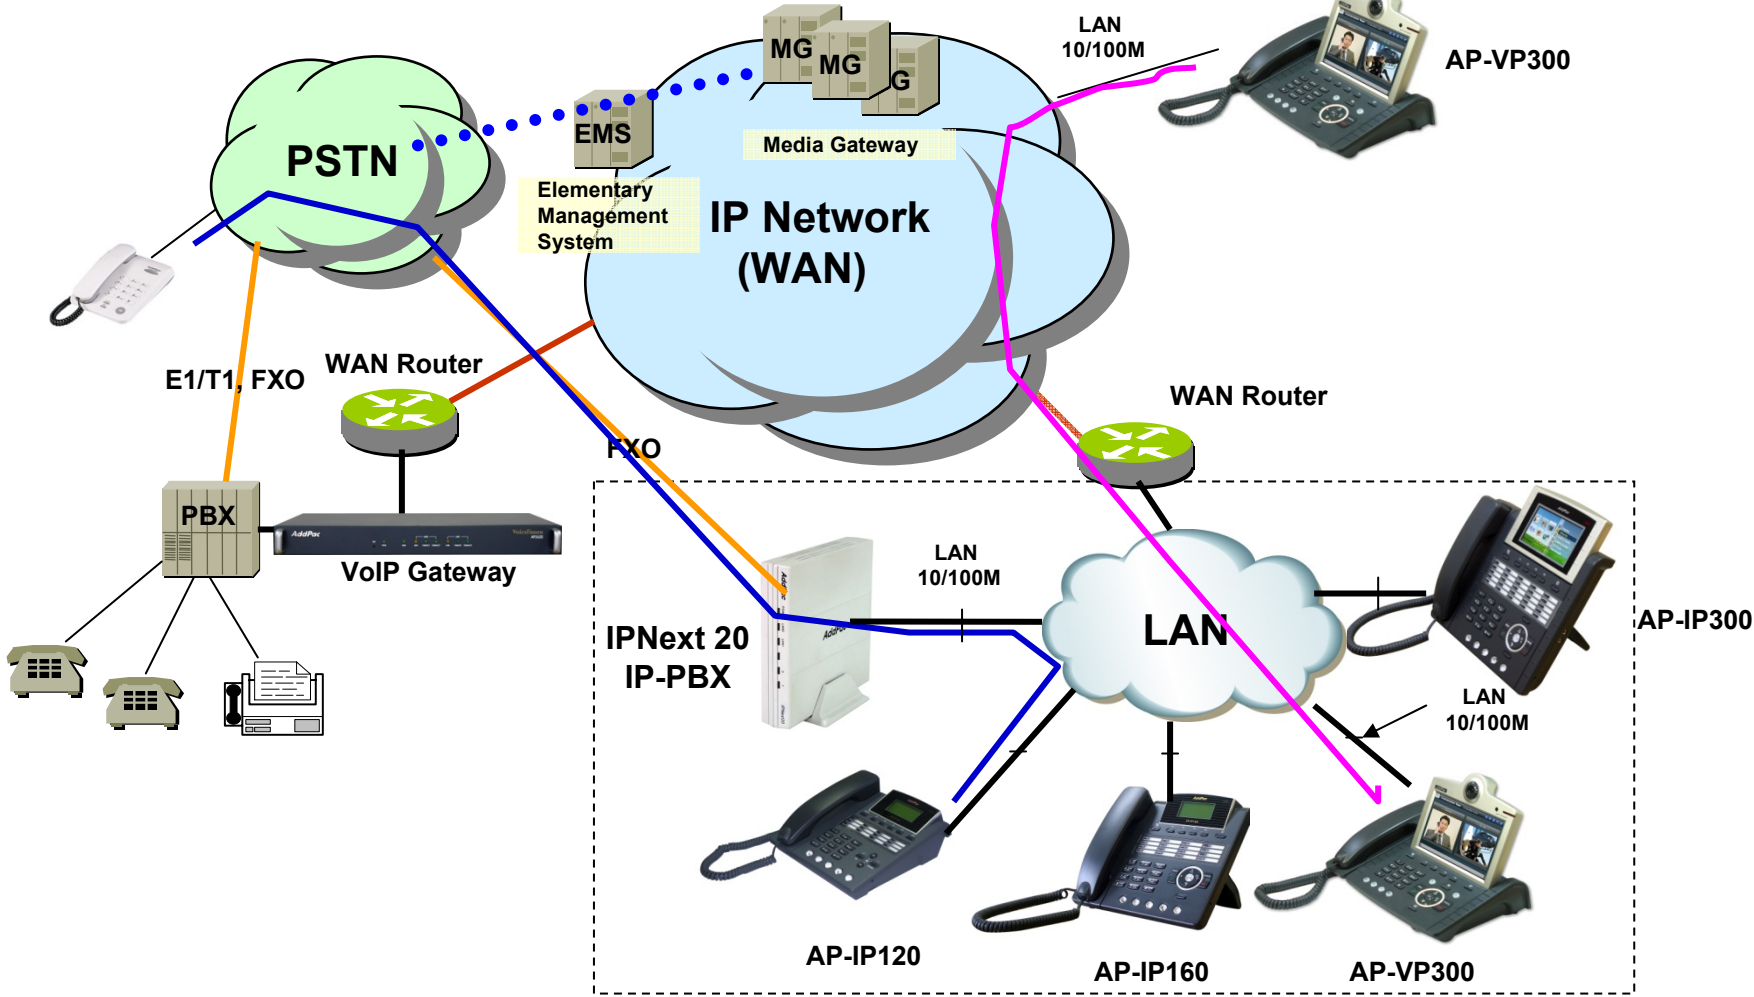IPNext SOHO IP-PBX Service Diagram



IPNext SOHO IP-PBX Comparison Table

		IPNext100 	IPNext50 	IPNext20 
Registration User Number		50	30	10
Concurrent Call User Number		20	15	5
IPv4/IPv6 Dual Stack Support		Support	Support	Support
VoIP Signaling	Internal	SIP	SIP	SIP
	External	H.323/SIP	H.323/SIP	H.323/SIP
Powerful IVR, UMS, Media Service, User Presence Service		Support	Support	Support
RTP Proxy Service (IPv6, Private IP)		Support	Support	Support
LAN Port		2	2	2
USB Interface		Support	Support	Option
FXO, FXS Interface		Option	Option	Option

IPNext100 SOHO IP-PBX



Main Features

IPNext100 IP-PBX for SOHO

- SIP Application Server, Proxy, Registrar and Location Server
- Multiple ITSP Trunk with SIP & H.323 Accounts Support
- High Performance RISC & Programmable DSP Architecture
- Two(2) 10/100Mbps Fast Ethernet (IP Share ,etc)
- One(1) USB Port for USB Memory and Wireless LAN
- Analog VoIP Gateway Interface
- High Performance LAN-to-LAN Routing Capability
- VoIP Gateway : G.711/G.726/G.723/G.729, T.38 Fax , VAD, etc
- Powerful Network Protocols (PPPoE, DHCP, Static Routing, etc)
- IPv4/IPv6 Dual Stack
- RTP Proxy Function Embedded for Private IP and IPv6 Address Interworking
- User Presence Service for Smart Multimedia Messenger and Smart IP Phone
- IVR Scenario Editor, Three Party Conference (G.711)
- Unified Messaging Service (Voice Mail, etc)
- Firmware Upgradeable Architecture
- Smart Multimedia Manager for IP-PBX Management
- Smart Messenger Service for UC
- Advanced Voice QoS Mechanism
- Small, Light and Compact Design
- Power Switch for Stability and Status LEDs

Hardware Specification

IPNext100 IP-PBX for SOHO

RISC
CPU

High-end
DSP

- RISC Microprocessor Computing Power
- + High End Programmable DSP
- VoIP Gateway Interface
 - IPNext100 Model A: Two(2) FXS Port
 - IPNext100 Model B: Two(2) FXO Port
 - IPNext100 Model C: Two(2) FXS Port + Two(2) FXO Port
 - IPNext100 Model D: Four(4) FXO Port
- Network Interface
 - Two(2) 10/100Mbps Fast Ethernet (RJ45)
- USB Interface
 - One(1) USB Host Mode Interface for USB Memory and Wireless LAN
- Power Supply
 - External Power Adaptor
- Power On/Off Switch
- Power LED, LAN LEDs, Port LEDs

Hardware Specification

IPNext100 IP-PBX for SOHO


RISC
CPU

High-end
DSP

Hardware Specifications

IPNext100 Series	Basic Specifications
CPU	High End RISC Microprocessor
Voice Interface (Option)	2FXS, 2 FXO, 2FXS 2FXO, 4FXO Voice Interface(RJ-11)
Ethernet Interface	2-Ports 10/100Mbps Ethernet Interface(RJ-45)
Console Interface	1-Port RS232C Interface(RJ-45)
Flash Memory	High-speed Flash Memory for System, Voice Mail, etc
System Main Memory	128Mbyte High-speed SDRAM
USB Interface	USB Host Mode Interface for USB Memory, Wireless LAN, USB Hub.
Power Requirement	External Power Supply Adaptor / VAC 110~220V, 50/60Hz, 5V 3A
Operating Temperature	0°C ~ 45°C (32 °F ~ 122°F)
Storage Temperature	-40°C ~ 85°C (-40°C ~ 185°F)
Relative Humidity	5% ~ 95% (Non-condensing)
Dimensions	43 x 265x 165(H x W x D)

Network interface Configurations

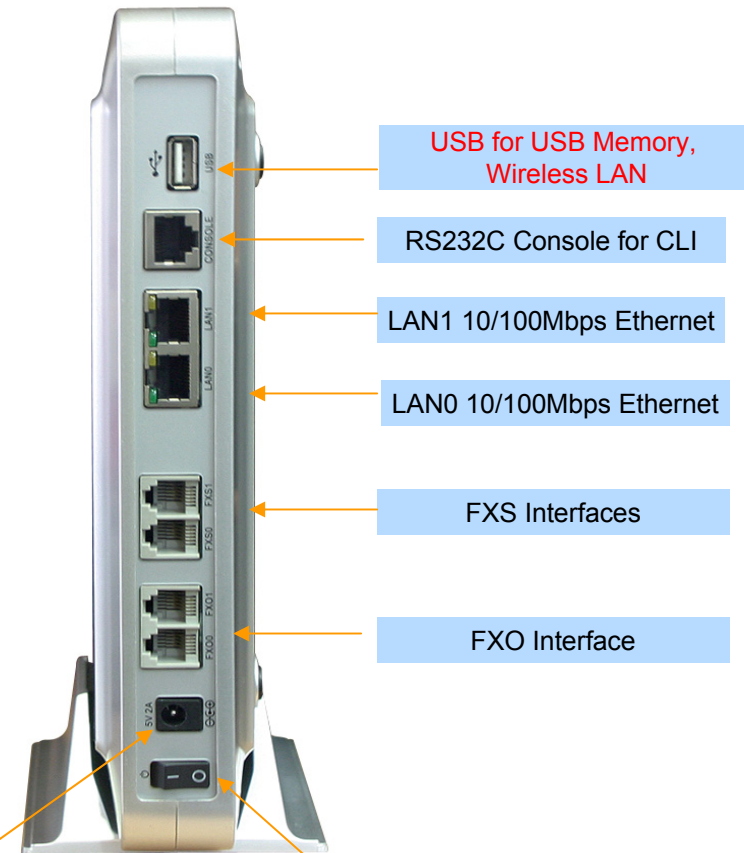


External Power Interface



Power Switch

Network Diagram

IPNext100 IP-PBX for SOHO (Model D)

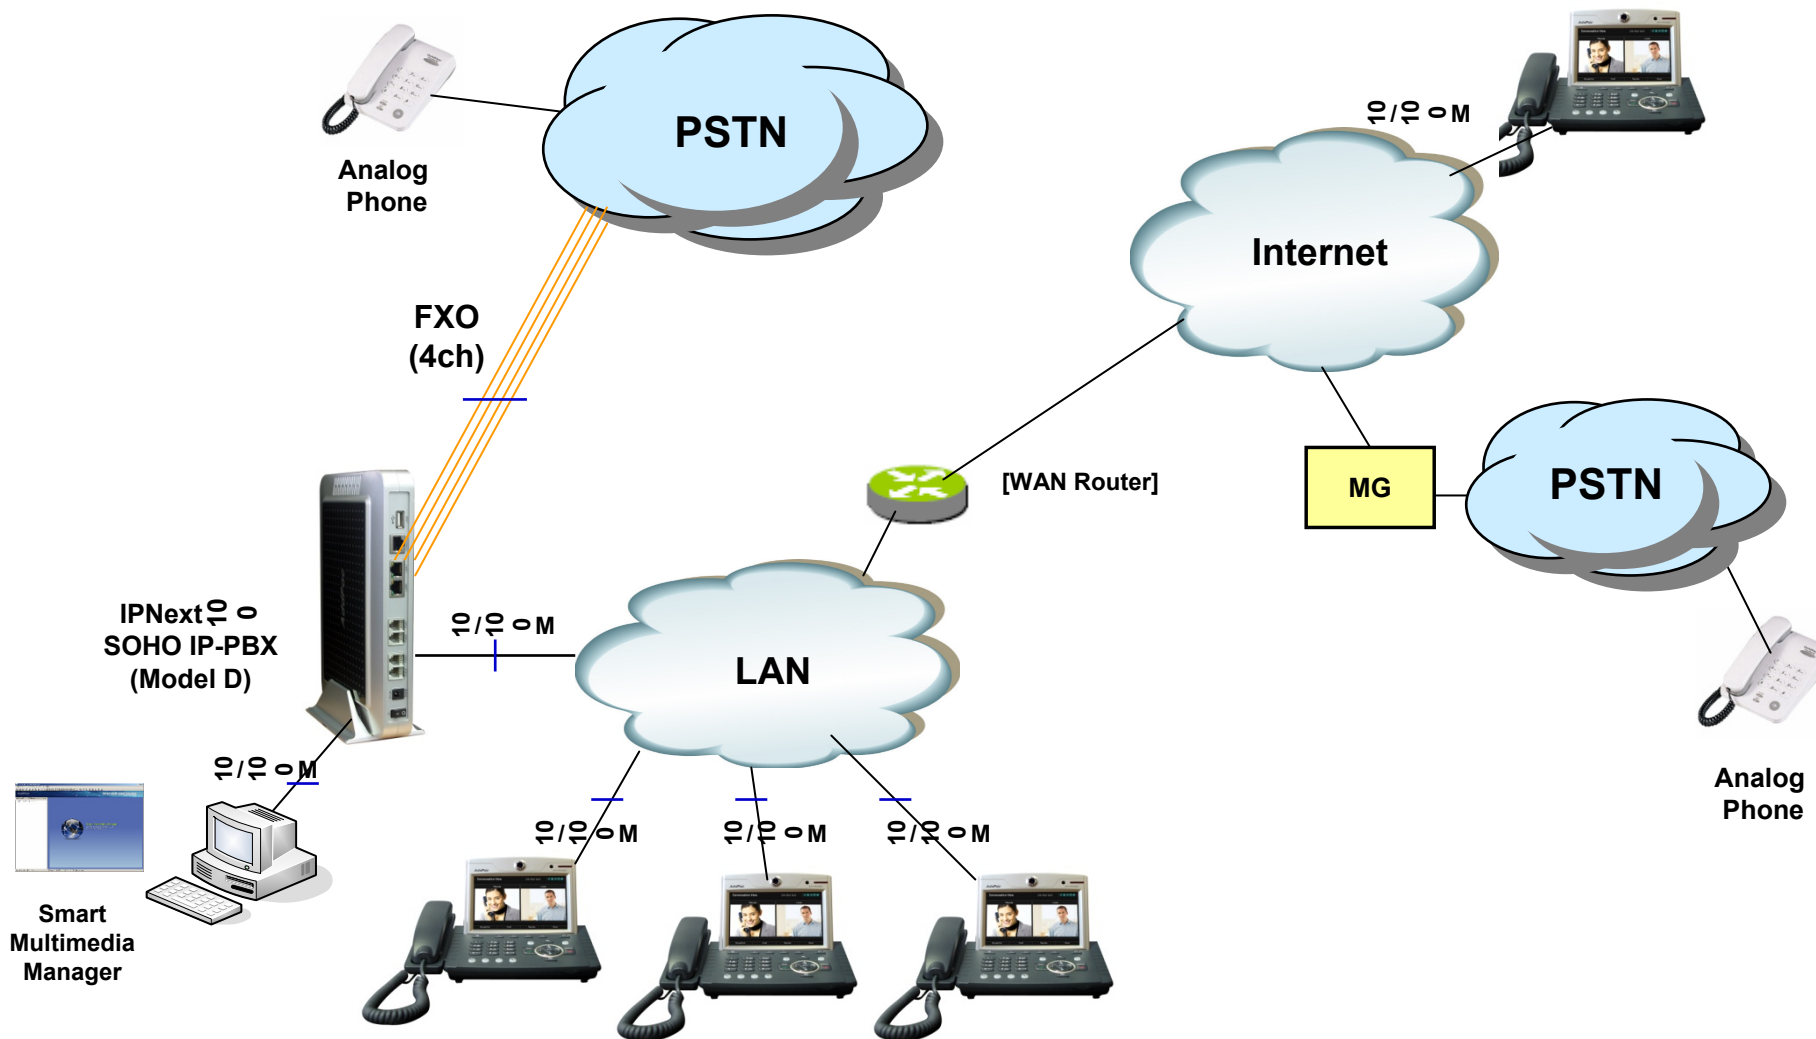

IPNext50 SOHO IP-PBX



Main Features

IPNext50 IP-PBX for SOHO

- SIP Application Server, Proxy, Registrar and Location Server
- Multiple ITSP Trunk with SIP & H.323 Accounts Support
- High Performance RISC & Programmable DSP Architecture
- Two(2) 10/100Mbps Fast Ethernet (IP Share ,etc)
- One(1) USB Port for USB Memory and Wireless LAN
- Up to Four(4) PSTN FXO VoIP Interface
- High Performance LAN-to-LAN Routing Capability
- VoIP Gateway : G.711/G.726/G.723/G.729, T.38 Fax , VAD, etc
- Powerful Network Protocols (PPPoE, DHCP, Static Routing, etc)
- IPv4/IPv6 Dual Stack
- RTP Proxy Function Embedded for Private IP and IPv6 Address Interworking
- Presence Service Features for Smart Multimedia Messenger and Smart IP Phone
- IVR Scenario Editor, Voice Mail, Third Party Conference (G.711)
- Firmware Upgradeable Architecture
- Smart Multimedia Manager for IP-PBX Management
- Smart Messenger Service for UC
- VPMS (VoIP Plug&Play Management System) for Large Scale Deployment
- Advanced Voice QoS Mechanism
- Small, Light and Compact Design
- Power Switch for Stability and Status LEDs

Hardware Specification

IPNext50 IP-PBX for SOHO

RISC
CPU

High-end
DSP

- RISC Computing Power + High End Programmable DSP
- VoIP Gateway Interface
 - IPNext50 Model A: Basic Configuration
 - IPNext50 Model B: Two(2) FXO Port
 - IPNext50 Model C: Four(4) FXO Port
 - IPNext50 Model D: Two(2) FXS & Two(2) FXO Port
 - IPNext50 Model R: Voice Recording Service
- Network Interface
 - Two(2) 10/100Mbps Fast Ethernet (RJ45)
- USB Interface
 - One(1) USB Host Mode Interface for USB Memory and Wireless LAN
- Power Supply
 - External Power Adaptor
- Power On/Off Switch
- Power LED, LAN LEDs, FXO Port LEDs

Hardware Specification

IPNext50 IP-PBX for SOHO


RISC
CPU

High-end
DSP

Hardware Specifications


IPNext 50 Series	Basic Specifications
CPU	High End RISC Microprocessor
Voice Interface (Option)	2 FXO Voice Interface(RJ-11) :Model B
Ethernet Interface	2-Ports 10/100Mbps Ethernet Interface(RJ-45)
Flash Memory	High-speed Flash Memory for System, Voice Mail, etc
System Main Memory	128Mbyte High-speed SDRAM
USB Interface	USB Host Mode Interface for USB Memory, Wireless LAN, USB Hub.
Power Requirement	External Power Supply Adaptor / VAC 110~220V, 50/60Hz, 5V 3A
Operating Temperature	0°C ~ 45°C (32 °F ~ 122°F)
Storage Temperature	-40°C ~ 85°C (-40°C ~ 185°F)
Relative Humidity	5% ~ 95% (Non-condensing)
Dimensions	182mm x 182mm x 38mm (W x D x H)

Network interface Configurations

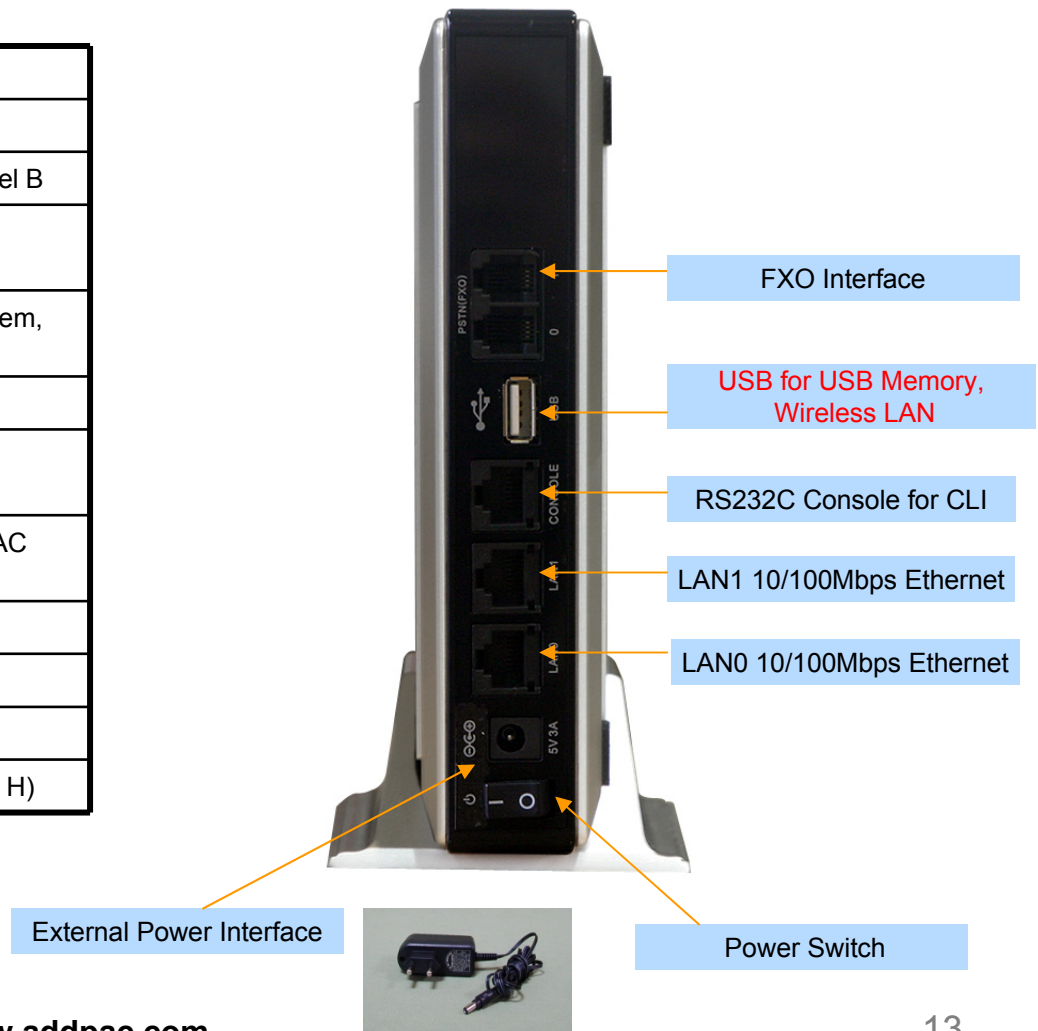


Network Diagram

IPNext50 IP-PBX for SOHO (Model C)

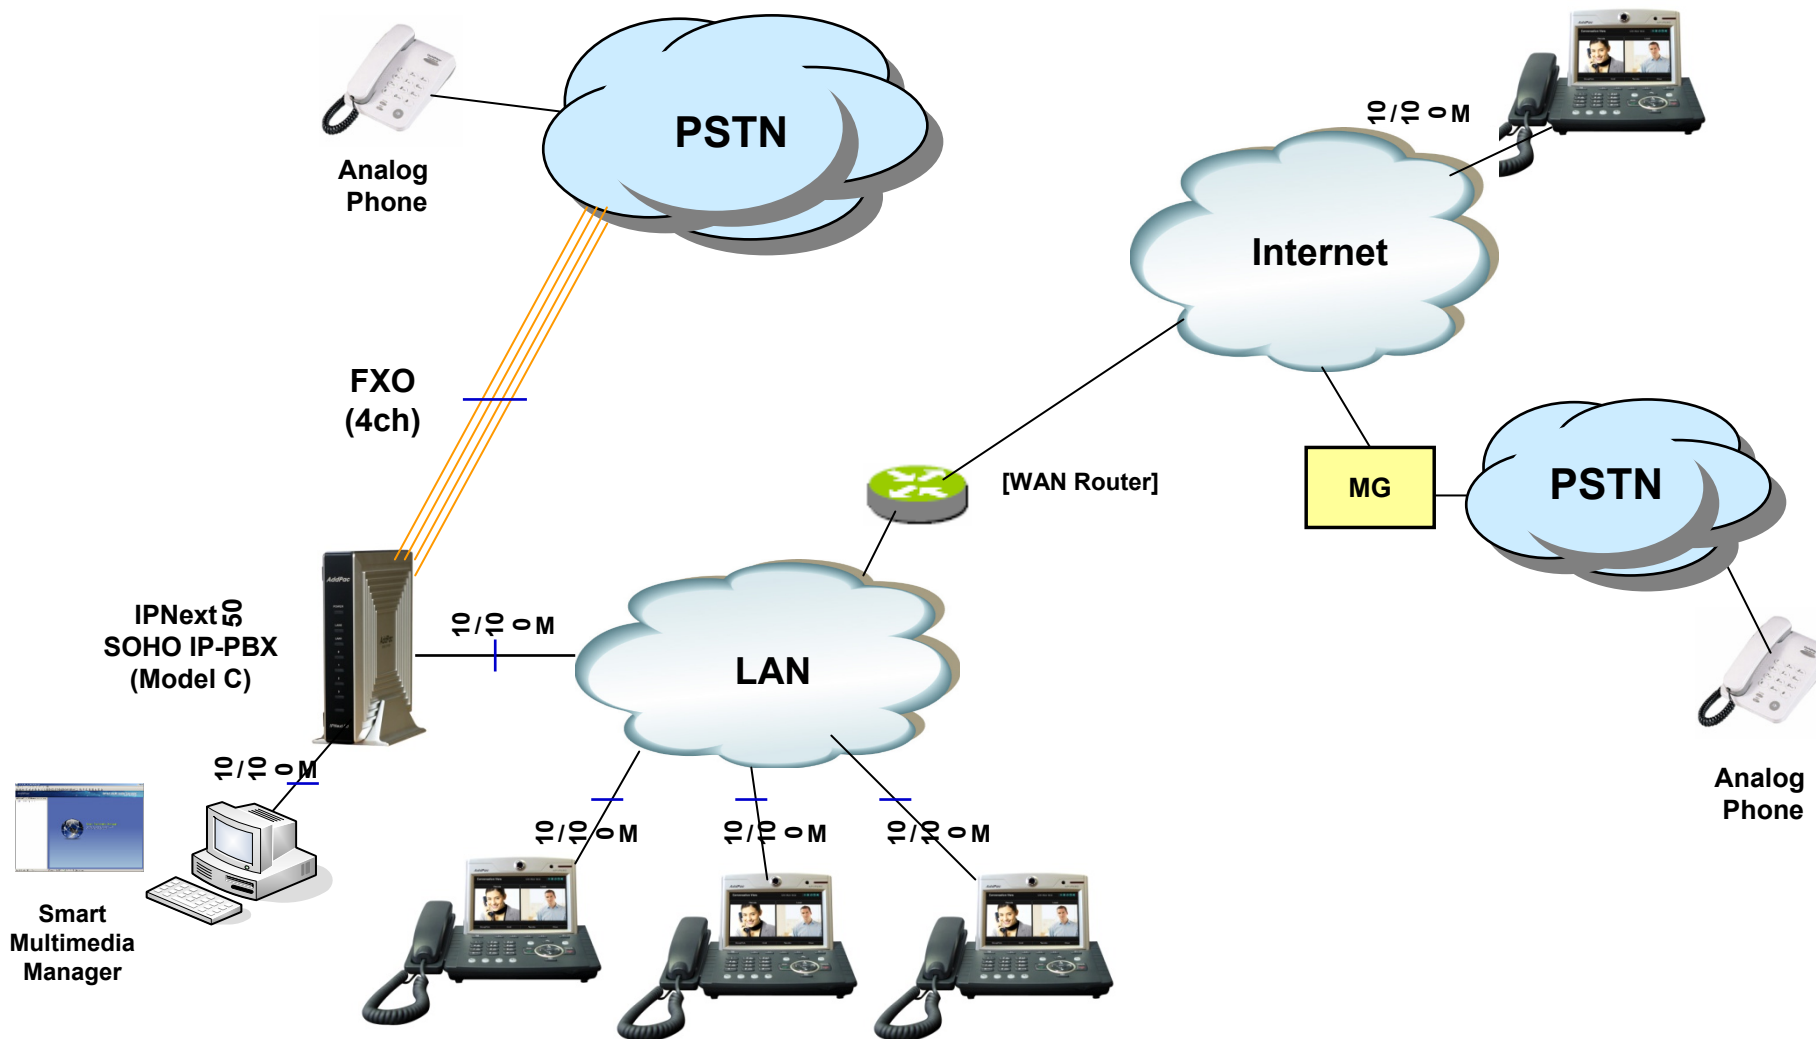

Network Diagram

IPNext50 IP-PBX for SOHO (Model D)

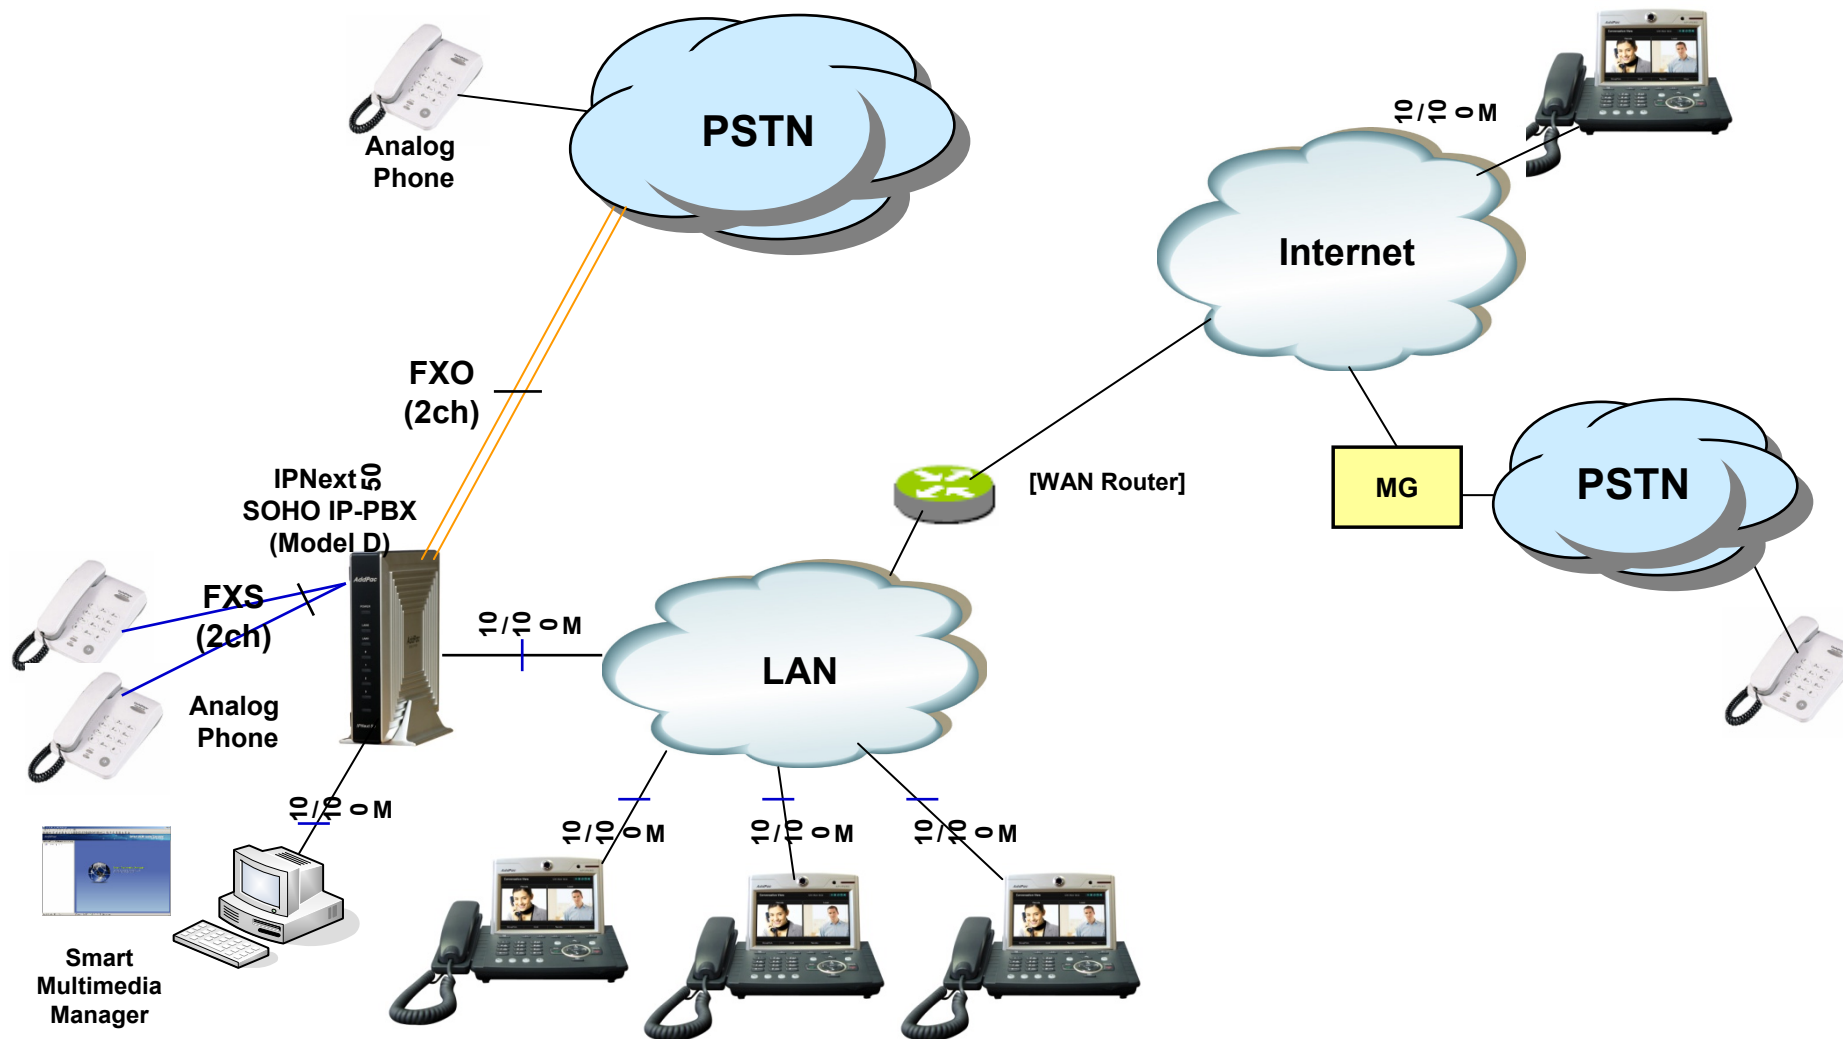


Smart
Multimedia
Manager

AddPac

www.addpac.com

Network Diagram (ex.) : Voice Recording

IPNext50 IP-PBX for SOHO (Model R)

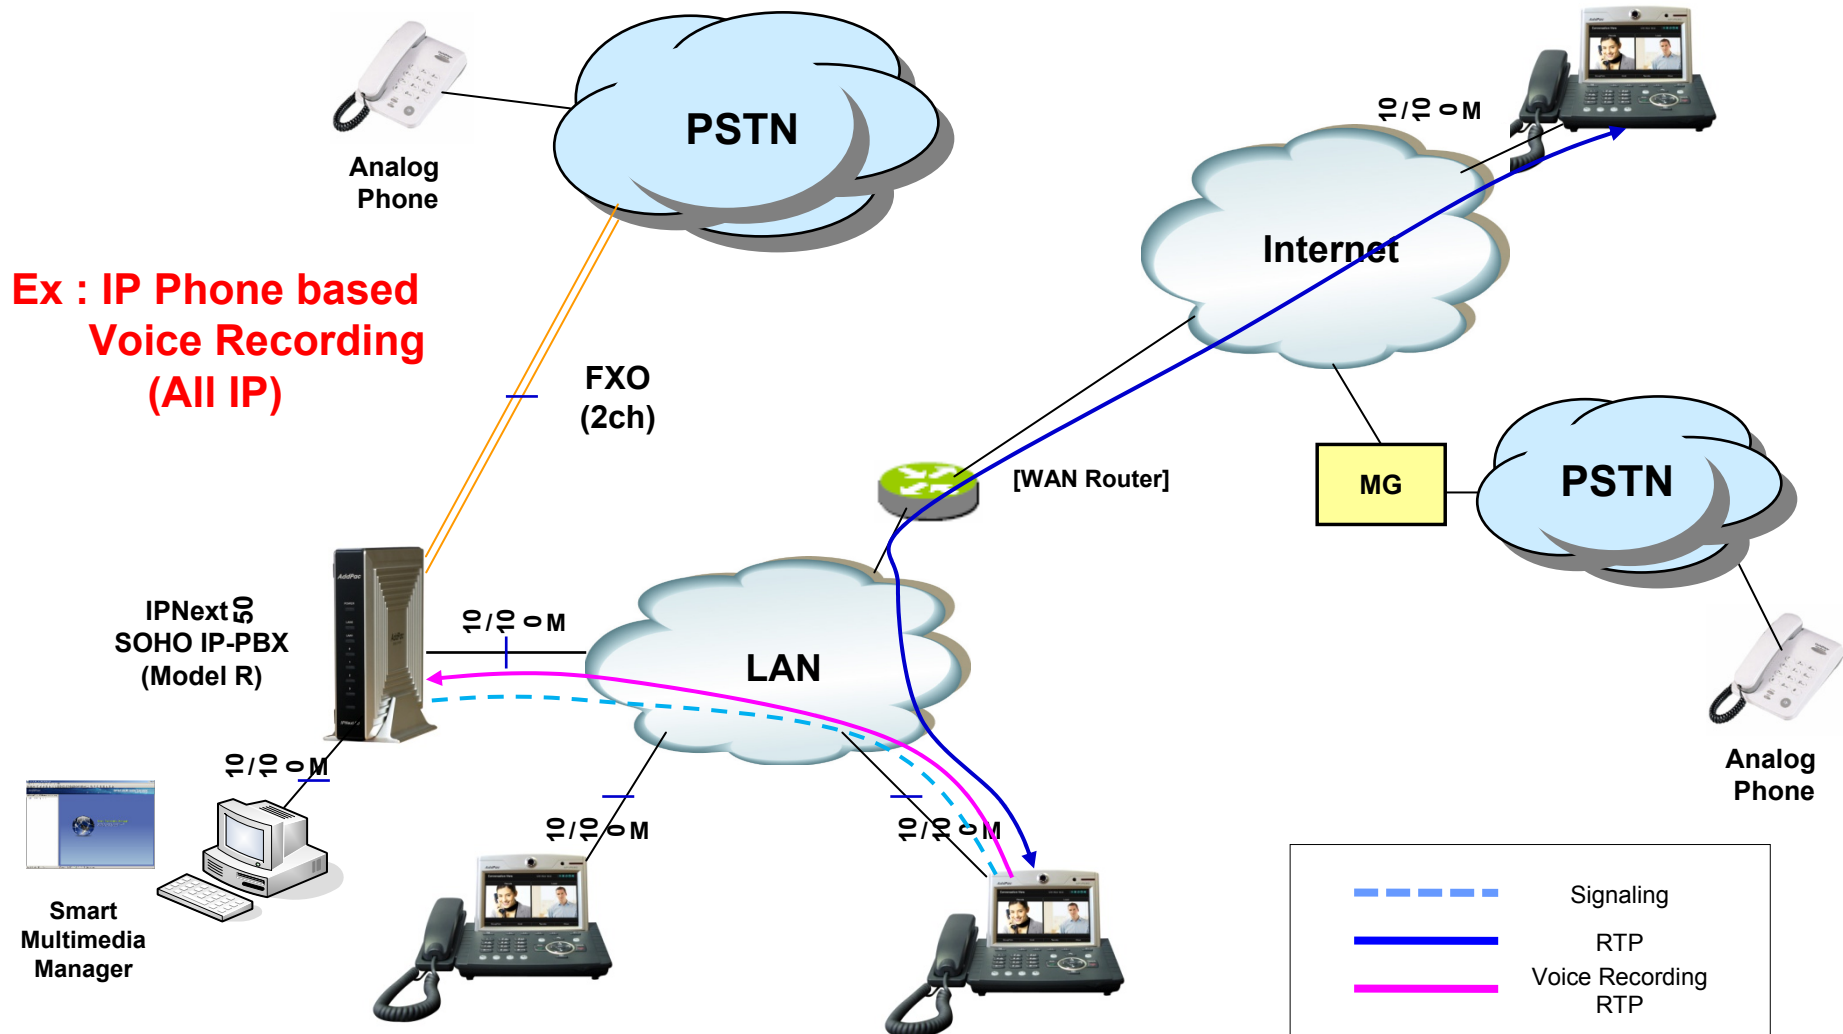

IPNext20 SOHO IP-PBX



Main Features

IPNext20 IP-PBX for SOHO

- SIP Application Server, Proxy, Registrar and Location Server
- Multiple ITSP Trunk with SIP & H.323 Accounts Support
- High Performance RISC & Programmable DSP Architecture
- Two(2) 10/100Mbps Fast Ethernet (IP Share ,etc)
- Up to Two(2) PSTN FXO VoIP Interface
- High Performance LAN-to-LAN Routing Capability
- VoIP Gateway : G.711/G.726/G.723/G.729, T.38 Fax , VAD, etc
- Powerful Network Protocols (PPPoE, DHCP, Static Routing, etc)
- IPv4/IPv6 Dual Stack
- RTP Proxy Function Embedded for Private IP and IPv6 Address Interworking
- Presence Service Features for Smart Multimedia Messenger and Smart IP Phone
- IVR Scenario Editor, Voice Mail, Third Party Conference (G.711)
- Firmware Upgradeable Architecture
- Smart Multimedia Manager for IP-PBX Management
- Smart Messenger Service for UC
- VPMS (VoIP Plug&Play Management System) for Large Scale Deployment
- Advanced Voice QoS Mechanism
- Small, Light and Compact Design
- Power Switch for Stability and Status LEDs

Hardware Specification

IPNext20 IP-PBX for SOHO

RISC
CPU

High-end
DSP

- RISC Microprocessor Computing Power
- + High End Programmable DSP
- VoIP Gateway Interface
 - IPNext20 Model A: Basic Configuration
 - IPNext20 Model B: Two(2) FXO Port
 - IPNext20 Model U: USB Interface
 - IPNext20 Model R: Voice Recording Service
- Network Interface
 - Two(2) 10/100Mbps Fast Ethernet (RJ45)
- Power Supply
 - External Power Adaptor
- Power On/Off Switch
- Power LED, LAN LEDs, FXO, FXS Port LEDs


Hardware Specification

IPNext20 IP-PBX for SOHO

Hardware Specifications

IPNext20 Series	Basic Specifications
CPU	High End RISC Microprocessor + Voice DSP Processor
Voice Interface (PSTN)	None :Model A
	2 FXO Voice Interface(RJ-11) :Model B
	2 FXS Voice Interface(RJ-11) :Model C
Ethernet Interface	2-Ports 10/100Mbps Ethernet Interface(RJ-45)
Flash Memory	High-speed Flash Memory for System, Voice Mail, etc
System Main Memory	128Mbyte High-speed SDRAM
Power Requirement	External Power Supply Adaptor / VAC 110~220V, 50/60Hz, 5V 2A
Operating Temperature	0°C ~ 45°C (32 °F ~ 122°F)
Storage Temperature	-40°C ~ 85°C (-40°C ~ 185°F)
Relative Humidity	5% ~ 95% (Non-condensing)
Dimension	142mm x 142mm x 28mm (H x W x D)
Weight	0.42kg

Network interface Configurations

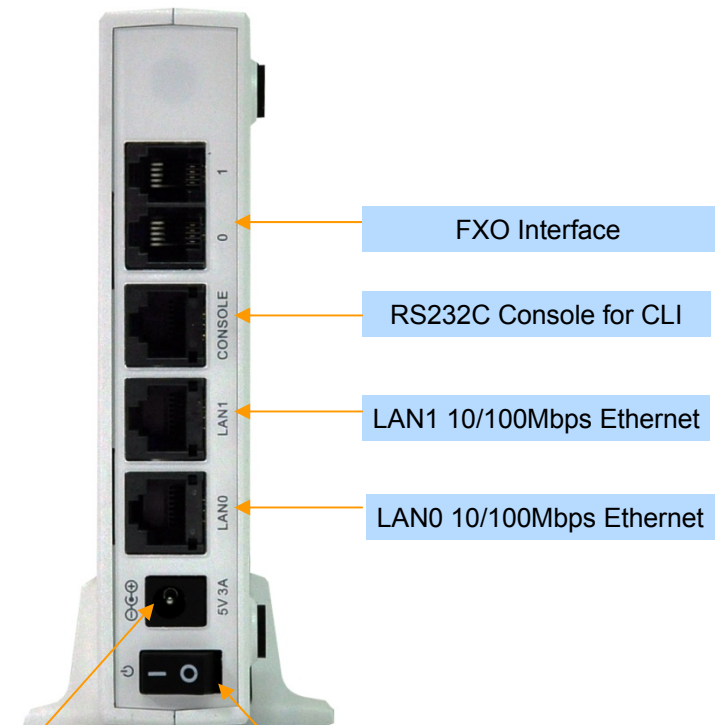


External Power Interface



Power Switch

Network Diagram

IPNext20 IP-PBX for SOHO (Model UB)

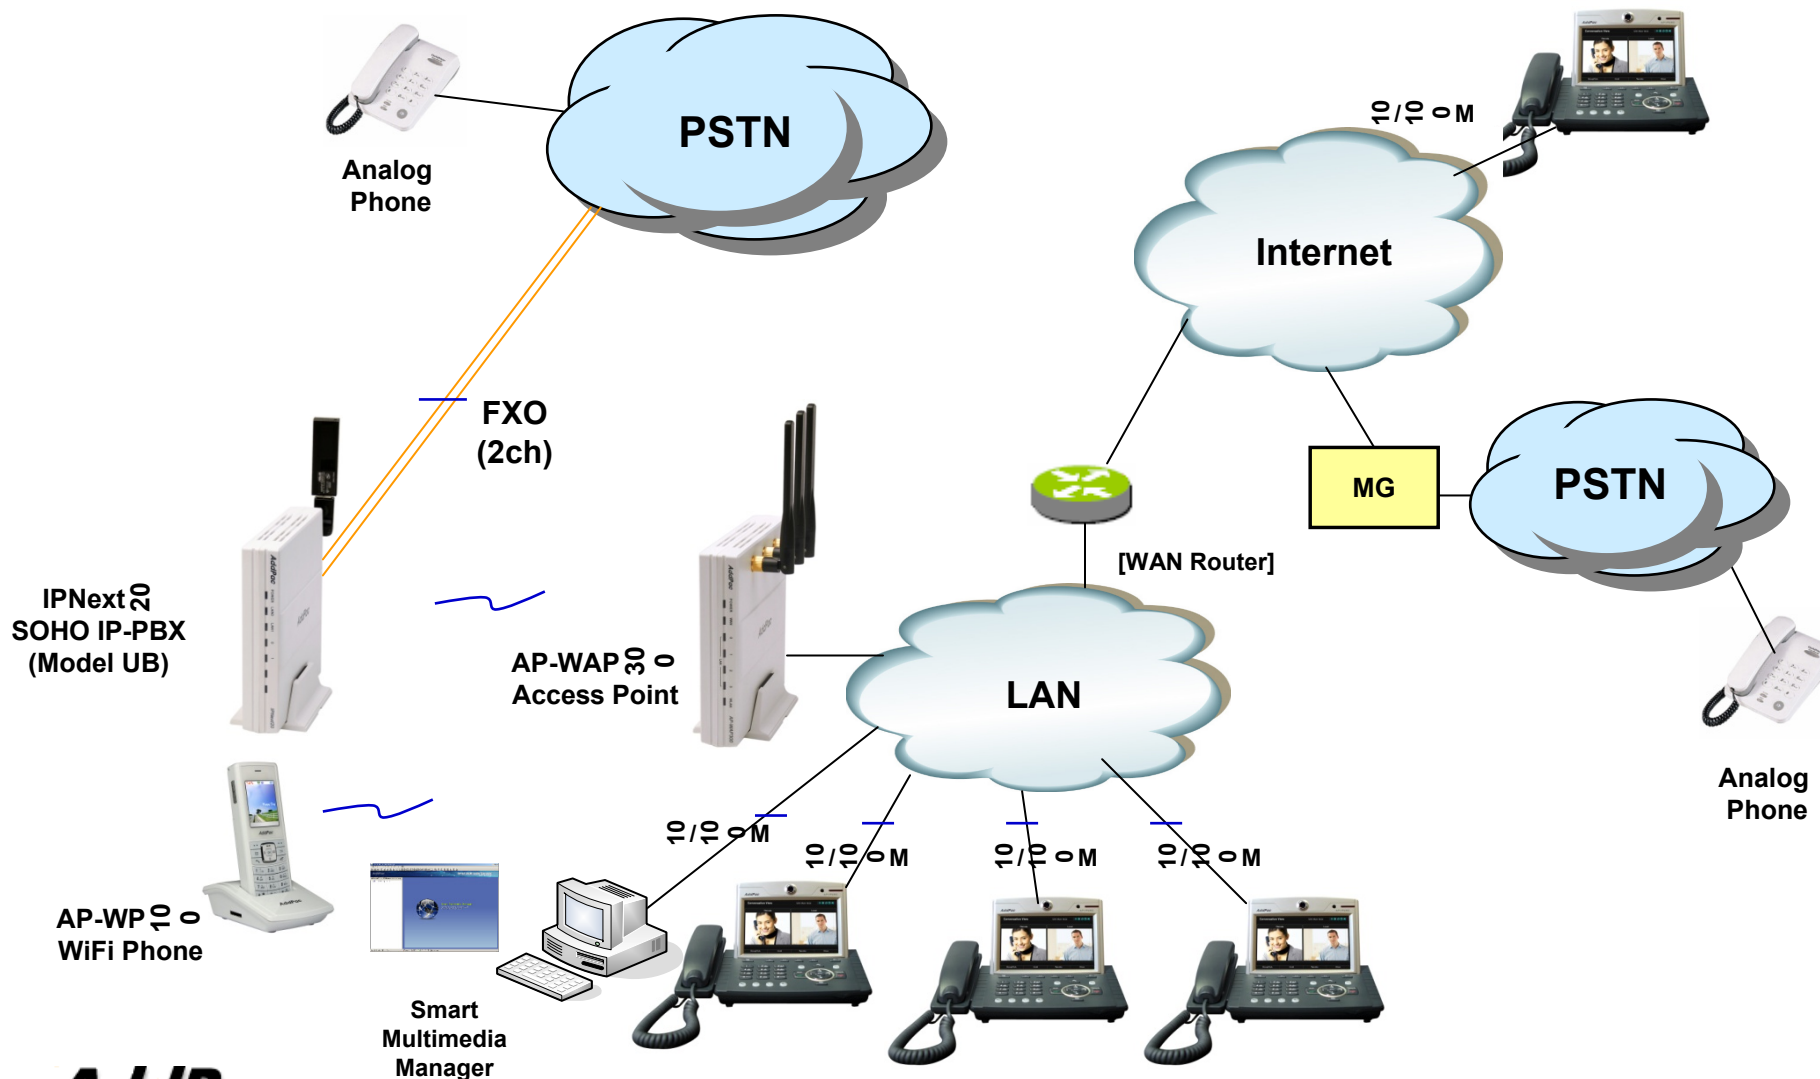

AddPac

www.addpac.com



AddPac IP Terminals

AddPac IP Terminals

- AP-VP500 Video Phone
- AP-VP350 MCU Video Phone
- AP-VP300 Video Phone
- AP-VP280 Video Phone
- AP-VP250 Video Phone
- AP-VP230 Video Phone
- AP-VP150 Video Phone
- AP-VP120 Video Phone
- AP-IP300 IP Phone
- AP-IP250 IP Phone
- AP-IP230 IP Phone
- AP-IP160 IP Phone
- AP-IP120 IP Phone
- AP-IP90 IP Phone
- AP-WP100 Wi-Fi Phone
- AP-SMP100 Soft Phone



AP-VP500



AP-VP300



AP-VP150



AP-WP100



AP-VP120



AP-IP300



AP-IP230



AP-IP160



AP-IP120

Smart Communicator

AP-SMP100 Soft Phone (Video/Voice)

- MS-Window based Soft-Phone
- Smart Multimedia (Video/Voice) Soft-Phone
- IP Real-time Audio/Video Broadcasting Terminal Solution
- Built-In Smart Messenger Function
- Up to 30fps with VGA-Resolution(MPEG-4)
- Video Conference Call Support (AddPac External MCU Inter-working)
- Advanced Voice/Video Traffic QoS
- SIP, H.323* Signaling Support
- Support Various Call Signal via AddPac IP-PBX Inter-working

Smart Messenger

- MS-Window based Application
- Support Messenger Service
- Support Various Address Book
- Support User Presence Information
- Support User Search Feature
- Interoperation with Address Book and Smart Phone
- Support Smart Phone Control and Setup
 - Call Control and Forward Setup
- Support Unified Message Box
 - Voice Mail Box
 - Short Message Box



AP-VP300



AP-VP280



IPNext20
IP-PBX



AddPac Smart Messenger

Smart Window(1/2)

Smart Window is simple web based personal information management program for IP-PBX, Call Manager, etc.

Service Features

- User Information
 - Personal information configuration
- Alarm
 - Alarm event configuration
- User Search
 - User search using search keyword
- Call Forwarding
 - Call forwarding configuration
- Speed Dial
 - Speed dial configuration
- Conference*
 - Configuration of audio, video multiparty conference

Smart Window (2/2)

Main Layout of Smart Window consists of Menu, Contents, Help Message, etc.

The screenshot shows the Smart Window interface in a browser window. The main menu on the left includes 'Service' (Call Transfer, User Search, Speed Dial, Alarm) and 'Personal Information' (User Information). The main content area displays the 'User Search' page with a search form and a table of user information. The help message on the right explains the search functionality.

[User Name]	[User ID]	[E-mail]	[Phone Number]
대연석	1001	yslee@addpac.com	1001
권익현	1000	kkwon@addpac.com	123456789
서연호	1003	shseo@addpac.com	1003
홍길동	4000	dghong@addpac.com	4000
김민준	1002	mkim@addpac.com	1002
김희규	1005	ghkim@addpac.com	1005
오현석	1004	ohoo@addpac.com	1004
김진영	1007	pkwon@addpac.com	
김진태	1006	smkim@addpac.com	1006
전백동	1009	bdswong@addpac.com	

Main Menu









Help Message

Main Layout



IP Video Phones for IPNext SOHO

IP Video Phones for IPNext SOHO

	AP-VP500	AP-VP350	AP-VP300N	AP-VP280	AP-VP250	AP-VP230	AP-VP150	AP-VP120
								
LCD Size	12.1 Inch Touch Screen	7Inch Touch Screen	7Inch Touch Screen	7Inch Touch Screen	4.3Inch Touch Screen	5Inch Touch Screen	4.3Inch Touch Screen	4.3Inch
Camera	CCD	CCD	CCD	CMOS	CMOS	CMOS	CCD	CMOS
Video Codec	H.263 MPEG4 H.264	H.263 MPEG4 H.264	H.263 MPEG4 H.264	H.263 MPEG4 H.264	H.263 MPEG4 H.264	H.263 MPEG4 H.264	H.263 MPEG4 H.264	H.263 MPEG4 H.264
Signaling	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP
Video MCU	N/A	4-Party Video MCU	N/A	N/A	N/A	N/A	N/A	N/A
Voice MCU	3-Party	3-Party	3-Party	3-Party	3-Party	3-Party	3-Party	3-Party
LAN Port	2	2	2	2	2	2	2	2
PoE	N/A	N/A	Support	Support	Support	Support	Support	Support



IP Phones for IPNext SOHO

IP Phones for IPNext SOHO

	AP-IP300	AP-IP250	AP-IP230	AP-IP160	AP-IP120	AP-IP90
						
LCD Size	4.3 Inch Color LCD	4.3 Inch Color LCD	5 Inch Color LCD	4 Text Line Graphic LCD	4 Text Line Graphic LCD	4 Text Line Graphic LCD
Touch Screen	N/A	Support	Support	N/A	N/A	N/A
Speed-Dial Keys	25 Key with Presence LED	Touch Screen based 25 Keys	Touch Screen based 25 Keys	16 Key with Presence LED	12 Key with Presence LED	N/A
Voice Codec	G.711/G.726/G.729/G.723	G.711/G.726/G.729/G.723	G.711/G.726/G.729/G.723	G.711/G.726/G.729/G.723	G.711/G.726/G.729/G.723	G.711/G.726/G.729/G.723
Signaling	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP	H.323/SIP
3-Party Conversation	Support	Support	Support	Support	Support	Support
LAN Port	2	2	2	2	2	2
PoE(Optional)	Support	Support	Support	Support	Support	Support
FXO(Optional)	Support	Support	Support	Support	Support	Support



Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail : sales@addpac.com