

# Satellite based IP-PBX and VoIP Gateway Application



Satellite IP Telephony Solution

- IPNext600 IP-PBX Call Manager
- AP-MC1500 IP Audio MCU
- AP1800 VoIP Gateway
- AP-IP90 IP Phone

[Learn More >](#)

The advertisement features a blue background with a satellite in the upper right corner and two boats in the lower right. In the center, there are three pieces of AddPac hardware: a corded IP phone on the left, a rack-mounted IP Audio MCU in the middle, and a VoIP Gateway on the right.

**AddPac**

**AddPac Technology**


Sales and Marketing

[www.addpac.com](http://www.addpac.com)

# Contents


- Satellite IP Telephony Network Service Diagram
- Satellite IP Telephony Solution Devices
  - IPNext600 Dual Redundancy IP-PBX
  - AP-MC1500 Voice Multipoint MCU
  - AP1800 Analog/Digital VoIP Gateway

# Satellite IP Telephony Network Service Diagram

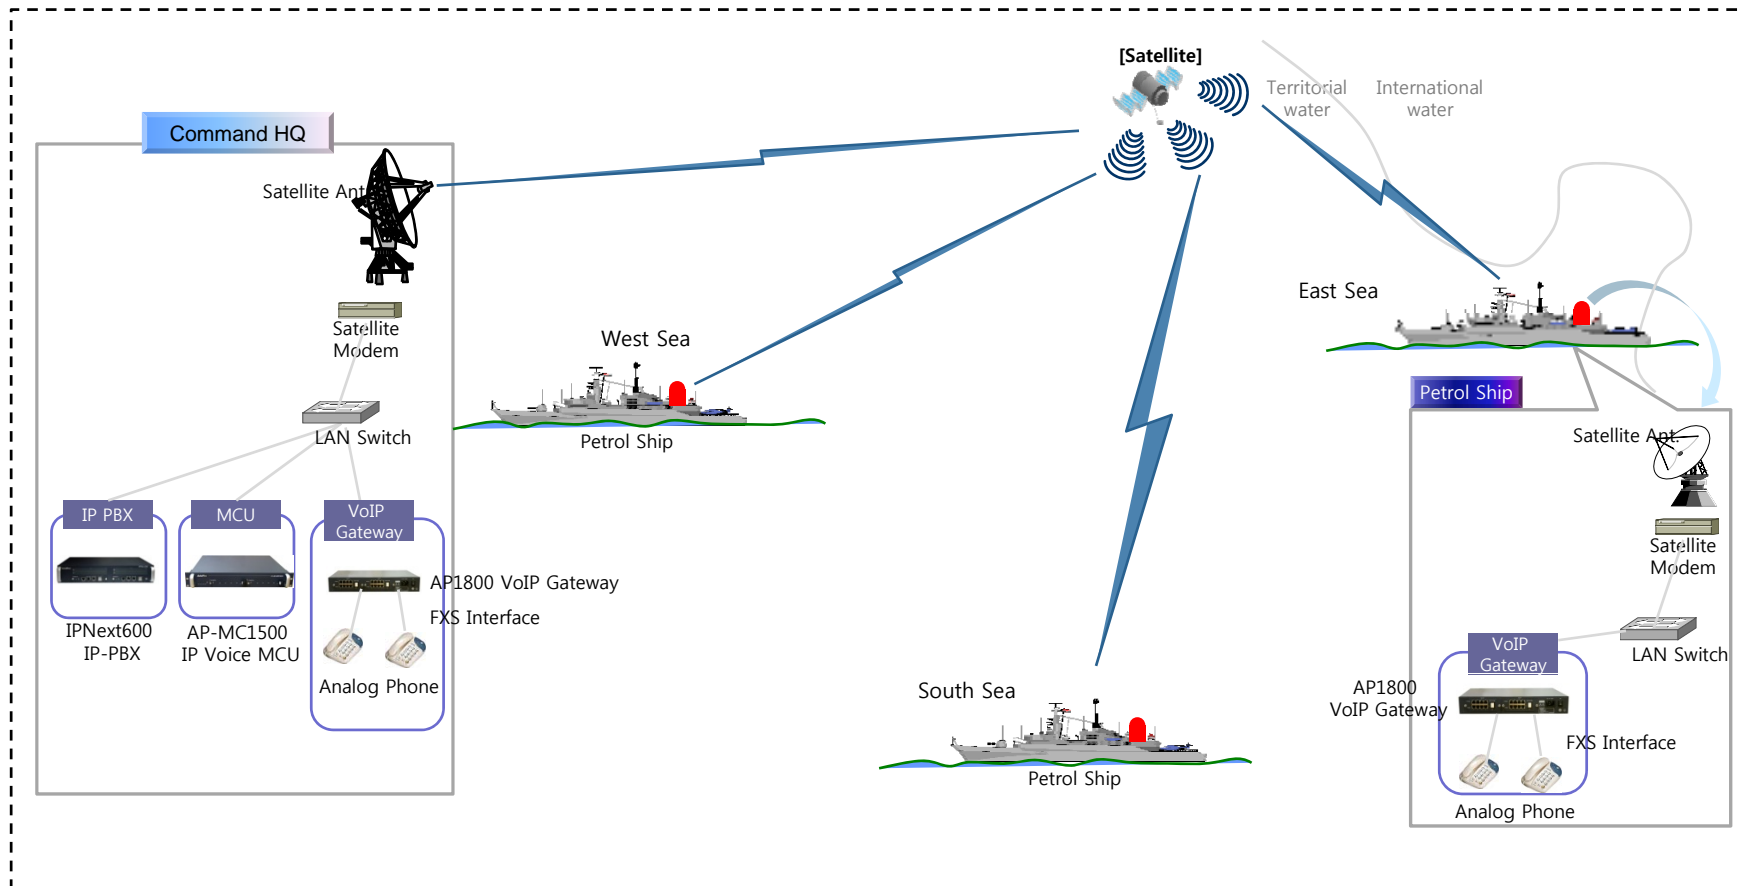



# Satellite IP Telephony Solution Devices



# IPNext600 IP-PBX (One System, Dual IP-PBX)

# Main Features

## IPNext600 Next Generation IP-PBX

- SIP Application Server, Proxy, Registrar and Location Server
- Multiple ITSP Trunk with SIP & H.323 Accounts Support
- Dual System Redundancy Architecture
  - Two(2) Fast Ethernet Interface / System
- High Performance RISC Architecture
- Powerful Network Protocols (PPPoE, DHCP, Static Routing, etc)
- IPv4/IPv6 Dual Stack
- RTP Proxy Function Embedded for Private IP and IPv6 Address Interworking
- User Presence Service Features for Smart Multimedia Messenger and Smart IP Phone
- IVR Scenario Editor, Voice Mail, Media Service (Coloring), Conference
- Firmware Upgradeable Architecture
- Smart Multimedia Manager for IP-PBX Management
- Smart Messenger Service (click to dial) for Unified Communication
- VPMS (VoIP Plug&Play Management System) & Smart NMS for Large Scale Deployment
- Advanced Voice QoS Mechanism
- Dual Redundancy Power Module

# Hardware Specification

IPNext600 Next Generation IP-PBX

RISC  
CPU

- 64bit High-End Microprocessor Computing Power
- Main Chassis
  - Dual Redundancy CPU Boards for System Fault Tolerant
    - Two(2) 10/100Mbps Gigabit Ethernet
    - One(1) RS-232C Console (RJ45)
  - Dual Redundancy Power Supply Module
  - Hot-Swap Features




# Hardware Specification

IPNext600 Next Generation IP-PBX

RISC  
CPU

## IPNext600 Front Side

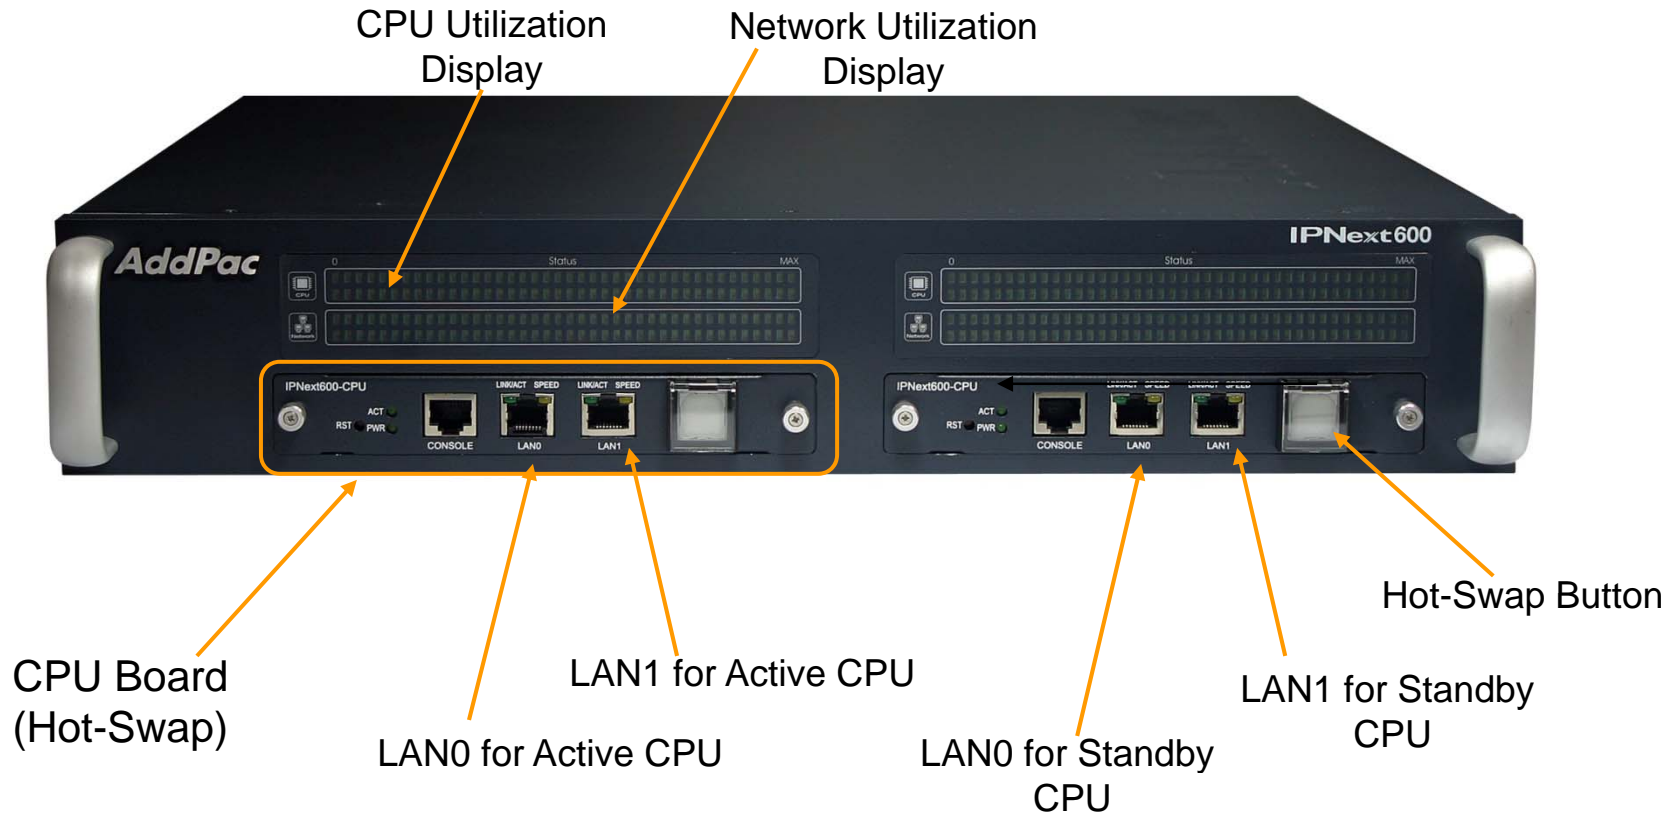



# Hardware Specification

IPNext600 Next Generation IP-PBX

RISC  
CPU

## IPNext600 Back Side

Dual Power Supply  
Modules  
(Hot-Swap)



PSU Module A

PSU Module B

Power On/Off Switch  
for System



# AP-MC1500

## IP based Audio MCU

# IP based Audio MCU

AP-MC1500 IP based Audio MCU

## Main Features

- IP based Hardware Audio Mixing Solution
- Support Various Conference System Model
  - Add-Hoc, Meet-Me, Dial Out
- Two(2) Module Slots for Audio MCU Module, Network Interface Modules
  - HIM-AMCU128, HIM-AMU64, etc
- Scalability and Flexibility
- G.711, G.726, G.729, G.723,1, etc
- High-performance Audio Mixing Service
- SIP and H.323 VoIP Signaling Support
- Smart Multimedia Manager Software for Management
- Firmware Upgradeable Architecture
- Audio Solution with Outstanding Network Service Capability

# IP based Audio MCU

AP-MC1500 IP based Audio MCU

## Hardware Specification

- High Performance RISC Microprocessor Computing Power
- Built-in High-end Programmable DSP Hardware Architecture
- Two(2) Module Slots for Audio MCU Module, Network Interface Module
- Main Chassis
  - Network Interface
    - Two(2) 10/100Mbps Fast Ethernet
    - One(1) RS-232C Console (RJ45)



# IP based Audio MCU

AP-MC1500 IP based Audio MCU

## Hardware Specification

- 128ch MCU Module (HIM-AMCU128)
  - High quality Audio Mixing
  - 128Channel Audio Mixing
  - Compact PCI Style Hot-Swap Function
  - High-End Programmable DSPs
  - Parallel DSP Processing for High Quality Audio Mixing
  - Concurrent Different Audio Codec Support
- 64ch MCU Module (HIM-AMCU64)
  - High quality Audio Mixing
  - 64 Channel Audio Mixing
  - Compact PCI Style Hot-Swap Function
  - High-End Programmable DSPs
  - Parallel DSP Processing for High Quality Audio Mixing
  - Concurrent Different Audio Codec Support
  - Cascade Support



# IP based Audio MCU

AP-MC1500 IP based Audio MCU

## Hardware Specification



Audio MCU Module (128ch, 64ch)



Reset

RS232C  
Console  
Port


LAN0 10/100Mbps Interface  
[www.addpac.com](http://www.addpac.com)

LAN1 10/100Mbps Interface

Power Switch

Power Inlet

**AddPac**



# AP1800 Analog/Digital VoIP Gateway

# Product Overview

## AP1800 VoIP Gateway

- High Performance Analog/Digital VoIP Gateway Solution
- H.323/SIP Dual Concurrent Stack Embedded
- High Performance RISC & Programmable DSP Architecture
- Two(2) 10/100Mbps Fast Ethernet (IP Share, etc)
- High Performance LAN-to-LAN Routing Capability
- G.711/G.726/G.723/G.729, T.38 Fax , VAD, etc
- Powerful Network Protocols (PPPoE, DHCP, Static Routing, etc)
- Firmware Upgradeable Architecture
- Smart NMS for Large Scale Deployment
- Advanced Voice QoS Mechanism
- Light and Compact Design with Internal Power Supply
- Two(2) VoIP Module Slot : 1-Port Digital E1, 8-Port FXS, 8-Port FXO, etc



# Hardware Specification

## AP1800 VoIP Gateway

RISC  
CPU

High-end  
DSP

- RISC Microprocessor Computing Power
- Up to 16 Port Analog VoIP Gateway
- Two(2) VoIP Module Slots (Hot-Swap)
  - 8-Port FXS Card, 8-Port FXO Card, 4-Port FXS 4-Port FXO Card , Digital E1/T1 Card
- Network Interface
  - Two(2) 10/100Mbps Fast Ethernet (RJ45)
- RS232C Console Interface
- Run LED, LAN LED, Port LEDs
- Internal Power Supply


# Hardware Specification

## AP1800 VoIP Gateway

### Hardware Specifications

AP1800 VoIP Series	Basic Specifications
Voice Interface	Two(2) VoIP Module Slots
	AP-N1-FXS8, AP-N1-FXO8, AP-N1-FXS4O4, AP-N1-E1
Ethernet Interface	2-Ports 10/100Mbps Ethernet Interface(RJ-45)
Flash Memory	4Mbyte High-speed Flash Memory
Base Memory	32 Mbyte High-speed SDRAM
Power Requirement	Power Supply Adaptor / VAC 110~220V, 50/60Hz,
Operating Temperature	0°C ~ 45°C (32 °F ~ 122°F)
Storage Temperature	-40°C ~ 85°C (-40°C ~ 185°F)
Relative Humidity	5% ~ 95% (Non-condensing)



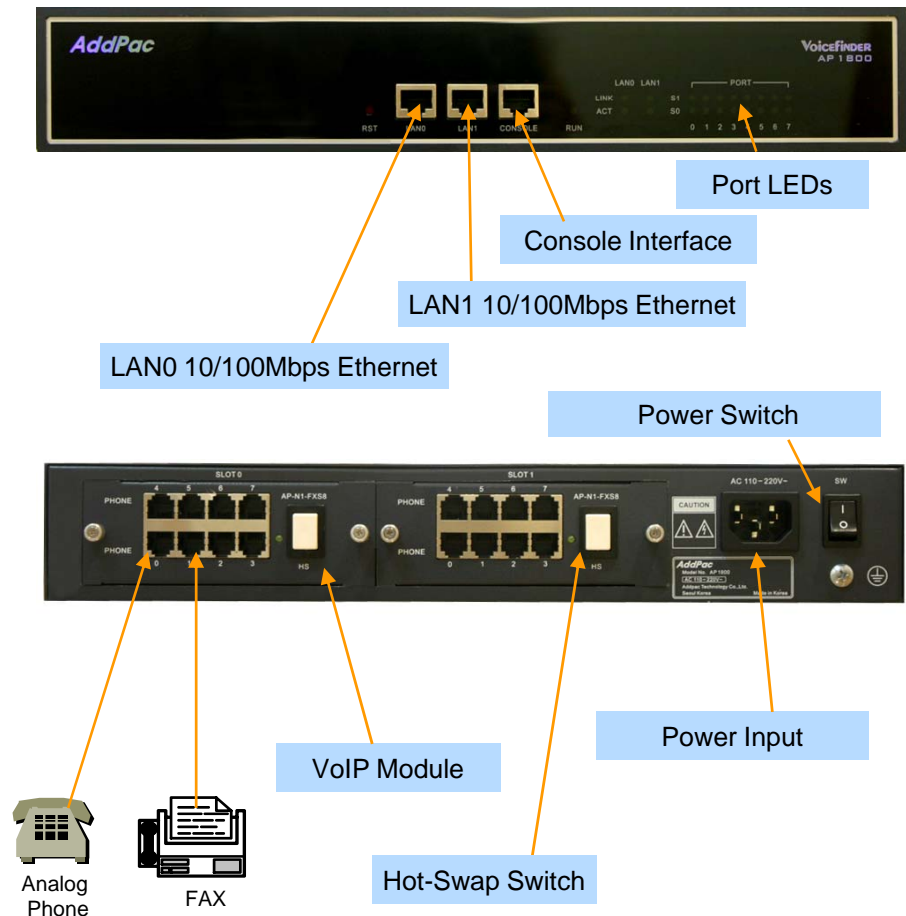


### Network interface Configurations



# VoIP Module Hardware Specification

AP1800 VoIP Gateway

DSP

Target	VoIP Modules	Module Features	Module Picture
AP1800	<b>AP-N1-FXS8</b>	8-Port FXS Module	
AP1800	<b>AP-N1-FXO8</b>	8-Port FXO Module	
AP1800	<b>AP-N1-FXS4O4</b>	4-Port FXS&4-Port FXO Module	
AP1800	<b>AP-N1-E1</b>	1-Port Digital E1/T1 Module	
AP1800	<b>AP-N1-2E1</b>	2-Port Digital E1/T1 Module	



# Thank you!

**AddPac Technology Co., Ltd.**  
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail [sales@addpac.com](mailto:sales@addpac.com)