

AP-EAP70

Emergency Call Analog FXO Phone

High Performance Emergency Call Analog FXO Phone Solution



Analog Line FXO Service

AddPac

AddPac Technology

2015, Sales and Marketing

Contents

- Product Overview
- Hardware Specification
- Analog FXO Application
 - Point-to-Point Connection
 - Point-to-Multipoint Connection
- Analog Line Distance Network Diagram
- VoIP Gateway FXS SLIC Modules Comparison (Ex.)
for Reachable Line Distance

Product Overview


AP-EAP70 Emergency Call Analog FXO Phone

- High Performance Emergency Call Analog FXO Phone Solution
- Full Duplex Voice Communication
- One(1) 10/100Mbps Fast Ethernet for Installation, Debugging, Management, Firmware Upgrade, etc
- Long distance like as PSTN (Normal 3km)
- Very Long Distance Support (7~9Km, Option : Interworking with AddPac NGN FXS VoIP Gateway)
- High Quality Speaker Phone Features
- Powerful Network Protocols (PPPoE, DHCP, Static Routing, etc)
- Firmware Upgradeable Architecture
- Advanced Voice QoS Mechanism
- Die-Casting STILL Chassis (Option)
- External Power Supply

Hardware Specification

AP-EAP70 Emergency Call Analog FXO Phone

Front Side

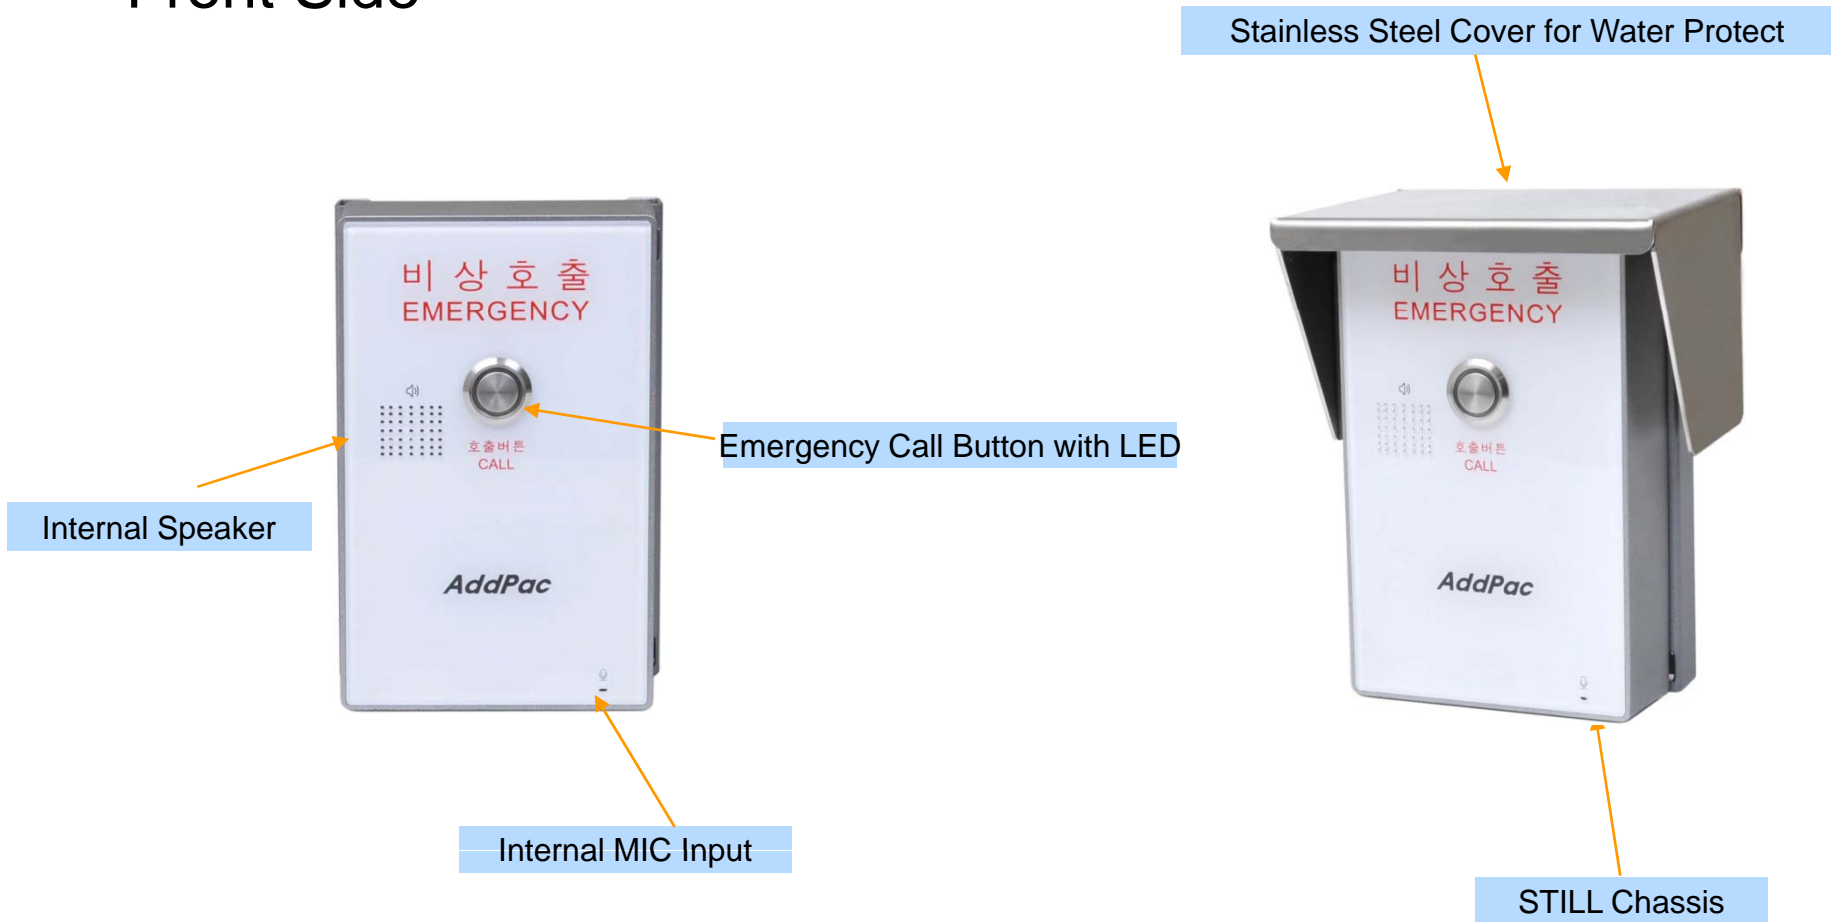

Hardware Specification

AP-EAP70 Emergency Call Analog FXO Phone

Back Side



Backside Wall Mount Bracket




Rubber Cover for Water Protect

Hardware Specification

AP-EAP70 Emergency Call Analog FXO Phone

Back Side

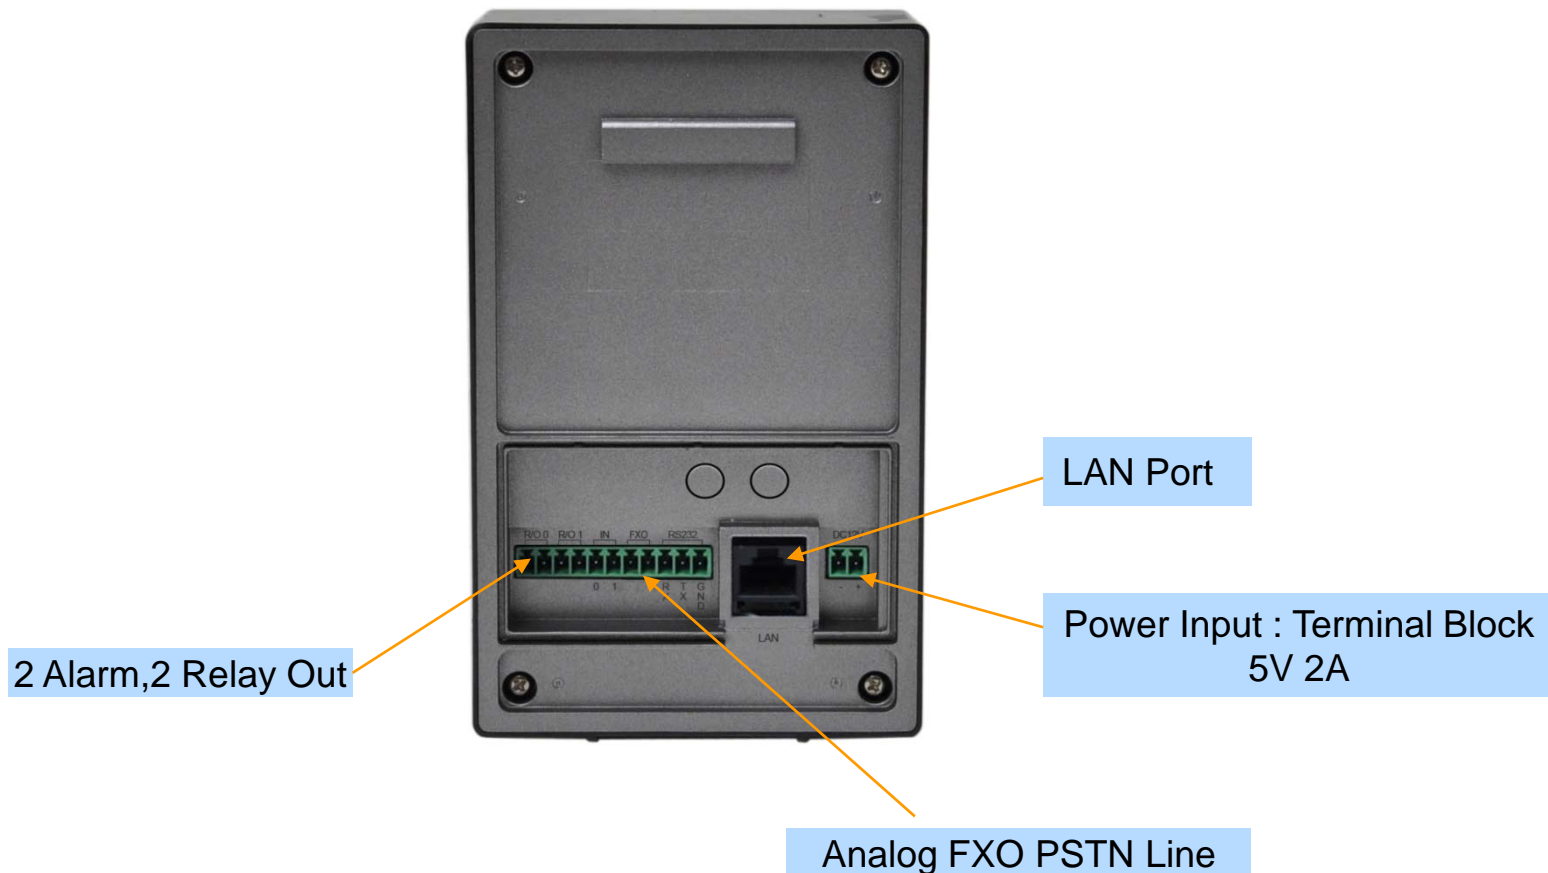

Hardware Specification

AP-EAP70 Emergency Call Analog FXO Phone

Power Supply

Terminal Block



12V 1A Power Adaptor

Example




Analog FXO Line Interface


Application Area

- Point-to-Point Application (Simple Application)
 - Legacy PBX Environment (FXO Interface)
- Point-to-Multipoint Application
 - Analog Line Service Environment (FXO, VoIP Gateway, IP-PBX, etc)


Point-to-Point Connection (Simple Appl.)

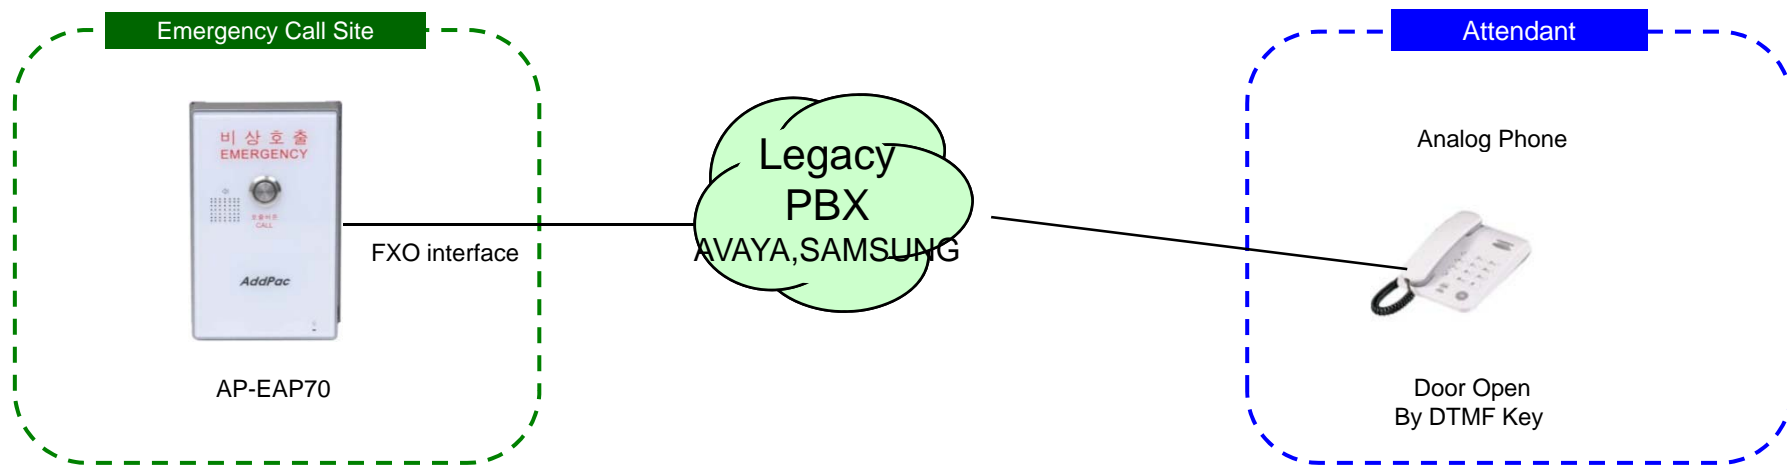

Analog Line Service Environment

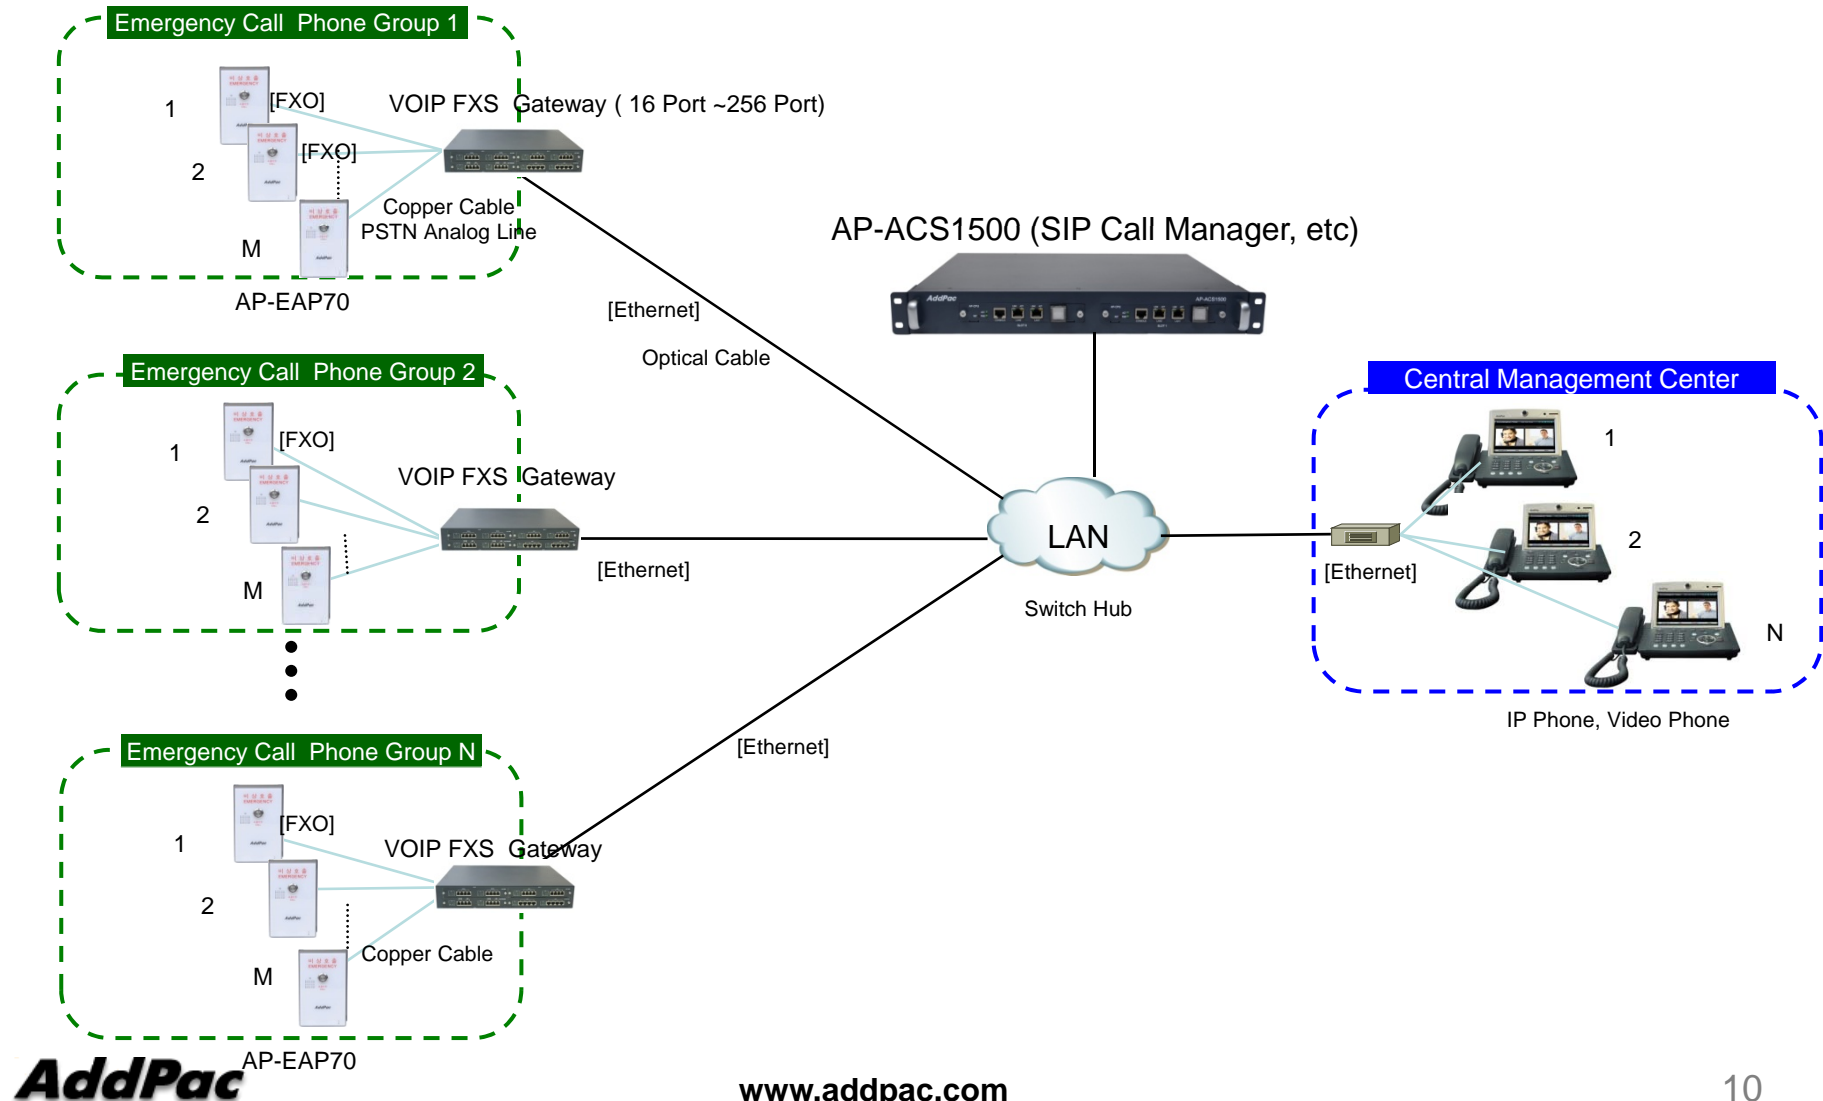

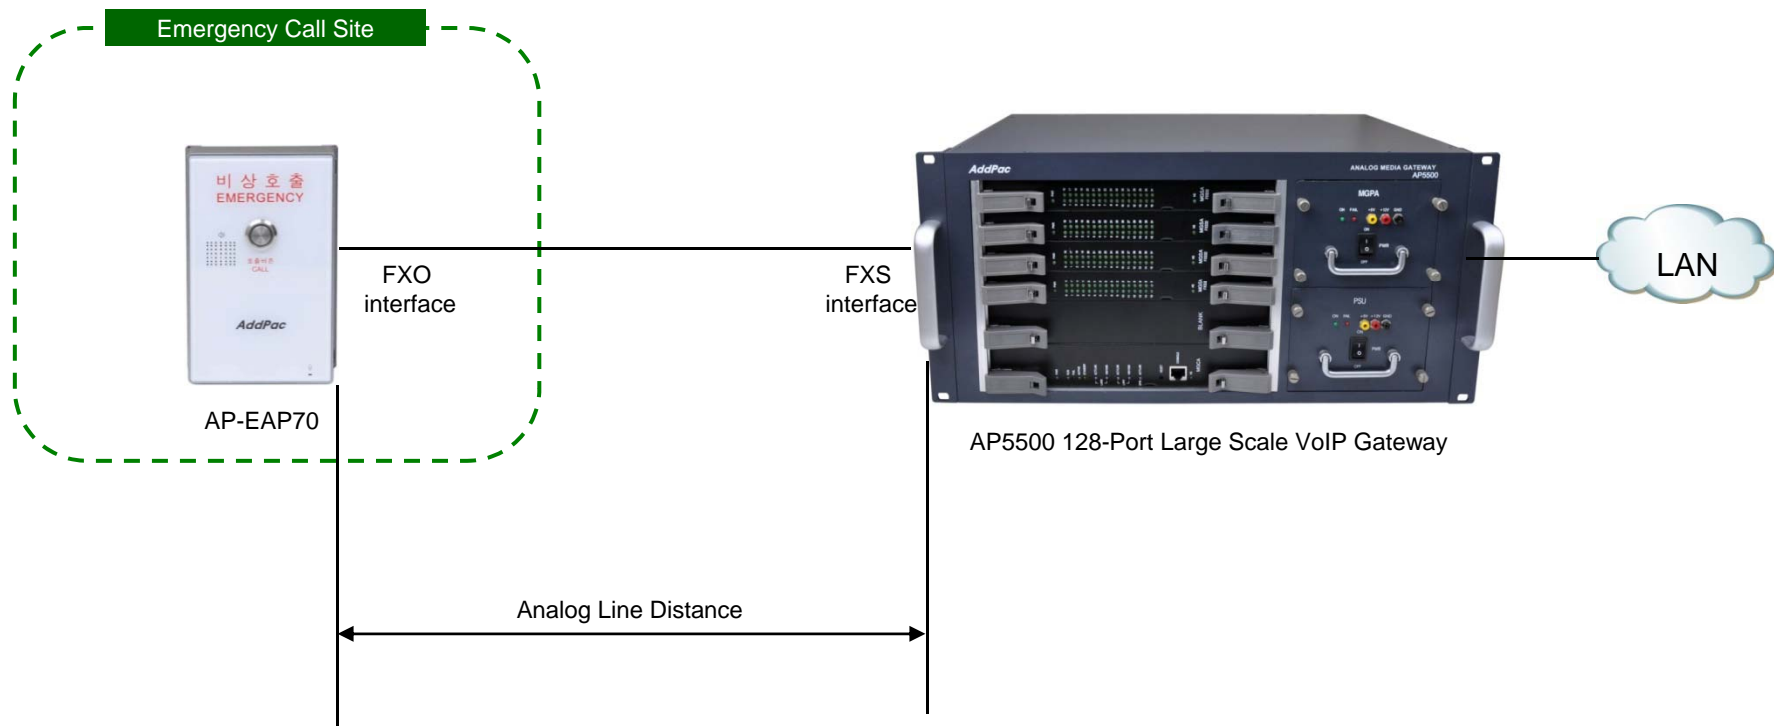

Analog FXO Line Distance



FXS SLIC Module Comparison

AP5500 Large Scale VoIP Gateway

Product	MGSA-FXS32	MGSA-FXS32-N1
		
Distance	Long Reachable Distance for Next Generation Network Service (8~9km)	Short & medium Reachable Distance (3km)
Analog Ports	32 Port FXS Module	32 Port FXS Module
Connector	Champ Connector	Champ Connector
Caller ID	Support	Support
Hot-Swap	Support	Support
DSP based Voice Codec	G.711,G.729,G.723, etc	G.711,G.729,G.723, etc
Ringing Voltage	Programmable : Typical 80Vrms	65Vrms
REN	5	3



Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)

FAX +82.2.568.3847 (KOREA)

E-mail sales@addpac.com