AP-GTR1000

GPS based Embedded NTP Server

High Performance GPS NTP Server Solution

보안관련 설정



AddPac Technology

Sales and Marketing

목 차


- **제품 주요 특징**
- **하드웨어 사양**
- FTP Port **변경 및** FTP **활성 및 차단**
- Telnet Port **변경 및** Telnet **활성 및 차단**
- SSH Port **변경 및** SSH **활성 및 차단**



제품 주요 특징

- High Performance GPS Time Receiver Terminal Solution
- IP based GPS Time Receiver (Location Free, etc)
- Embedded NTP (Network Time Protocol) Sever Solution
- Dual RS232 Port for GPS Time Information Transmission
- LCD Display for GPS Time Information
- External Antenna Interface Support
- Various Antenna Support for GPS Signal
- Blue LAMP for GPS Device Status
- Smart Web Manager for System Configuration & Management
- Window, Linux Simple Socket API Program Support
- Firmware Upgradeable Architecture
- Broadcasting Solution with Outstanding Network Service Capability
- RS232C Port Support for Command Line Interface

하드웨서 사양

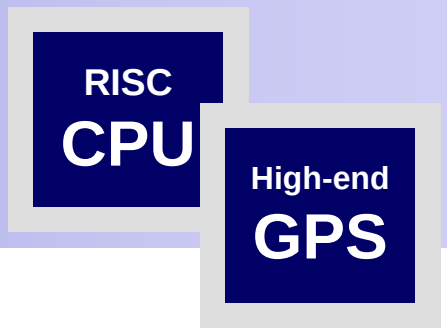

- RISC Microprocessor Computing Power
- High-end GPS Module Hardware Architecture
- One(1) Module Slot for GPS Module
- LCD Display at Front Side
- Blue LAMP
- One(1) 10/100Mbps Fast Ethernet Interface
- Dual(2) DB-9 RS232C Interface
- Internal Power Supply
- Rack Mount Bracket (Option)
- GPS Antenna (Option)
- Option Module : AP-GPS-RS232
  - Two(2) DB-9 RS232C Interface Port
  - GPS Antenna Interface Port

하드웨어 사양

RISC CPU

High-end GPS

Front Side



One(1) 10/100Mbps LAN

RS232C Console

Status LCD


On-Air Blue LAMP & Switch

하드웨어 사양

RISC CPU

High-end GPS

Back Side

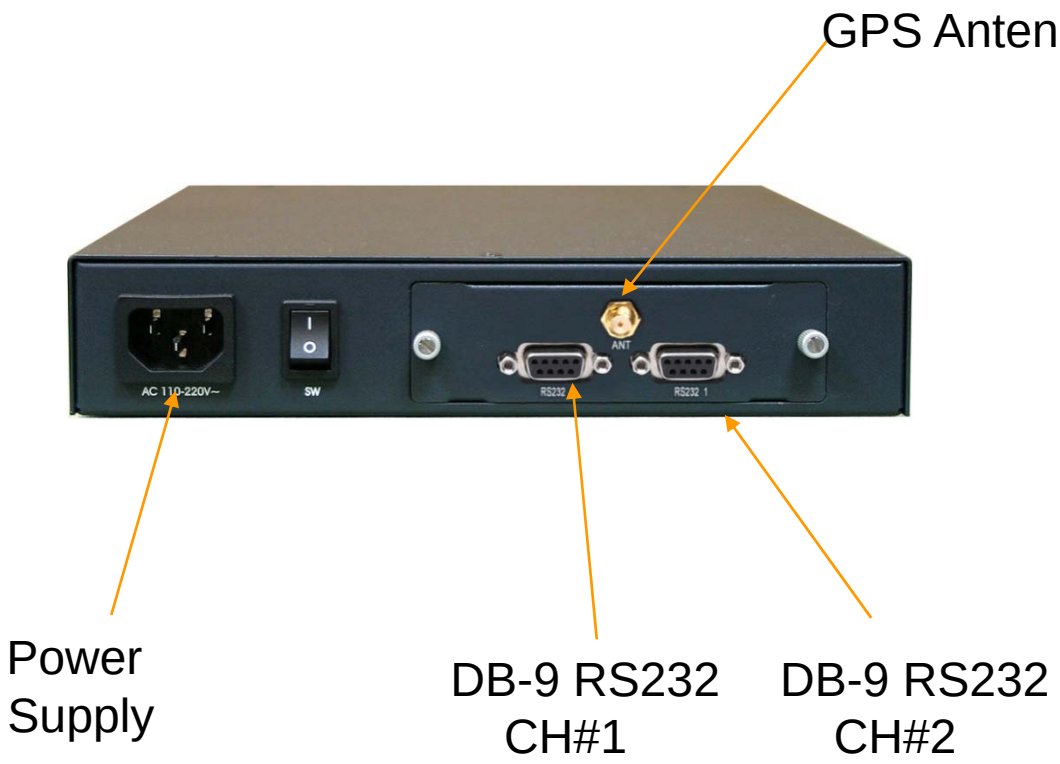

하드웨어 사양

RISC CPU

High-end GPS

GPS Antenna



FTP Port **변경 및** FTP **활성 및 차단**

•GTR# configure terminal
•GTR(config)# ftp server

ftp server – ftp **활성**
(default :21)

•GTR# configure terminal
•GTR(config)# no ftp server

ftp server – ftp **비활성**

•GTR# configure terminal
•GTR(config)# ftp port control 35021 data 35020

ftp port **변경 예** (21 -> 35021)

Telnet Port **변경 및** Telnet **활성 및 차단**

•GTR# configure terminal
•GTR(config)# telnet server

telnet port **활성** (default :23)

•GTR# configure terminal
•GTR(config)# no telnet server

telnet port **비활성**

•GTR# configure terminal
•GTR(config)# telnet port 2023

telnet port – telnet port 23**에서** 2023 **으로 변경**

SSH Port **변경 및** SSH **활성 및 차단**

•GTR# configure terminal
•GTR(config)# ssh server

ssh port **활성** (default :22)

•GTR# configure terminal
•GTR(config)# no ssh server

ssh **비활성**

•GTR# configure terminal
•GTR(config)# ssh port 20022

ssh port **변경** (**예** 20022 port)

Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)
FAX +82.2.568.3847 (KOREA)
E-mail sales@addpac.com