

APOSd™

Audio/Video DSP Codec Solution
APOSd : AddPac Operating System for DSP





AddPac

AddPac Technology

Sales and Marketing

www.addpac.com

Contents

APOSd Solution

AddPac

- **APOSd Overview**
- **APOSd Software Service**
- **Video Codec Features & Service**
  - H.263, MPEG-4, H.264, JPEG, MJPEG etc
- **Audio & Voice Codec Features and Service**
  - MP3, G.711, G.726, etc
- **AV Mixing Features for MCU Application**
  - Simplified AV Mixing Model
  - Advanced AV Mixing Model
- **Dual Video Decoder, Single Encoder Service**
- **Single Source, Dual Video Encoding Feature & Service**
- **Network Service and Features**
- **OSD Software Features**

APOSd Overview

AddPac

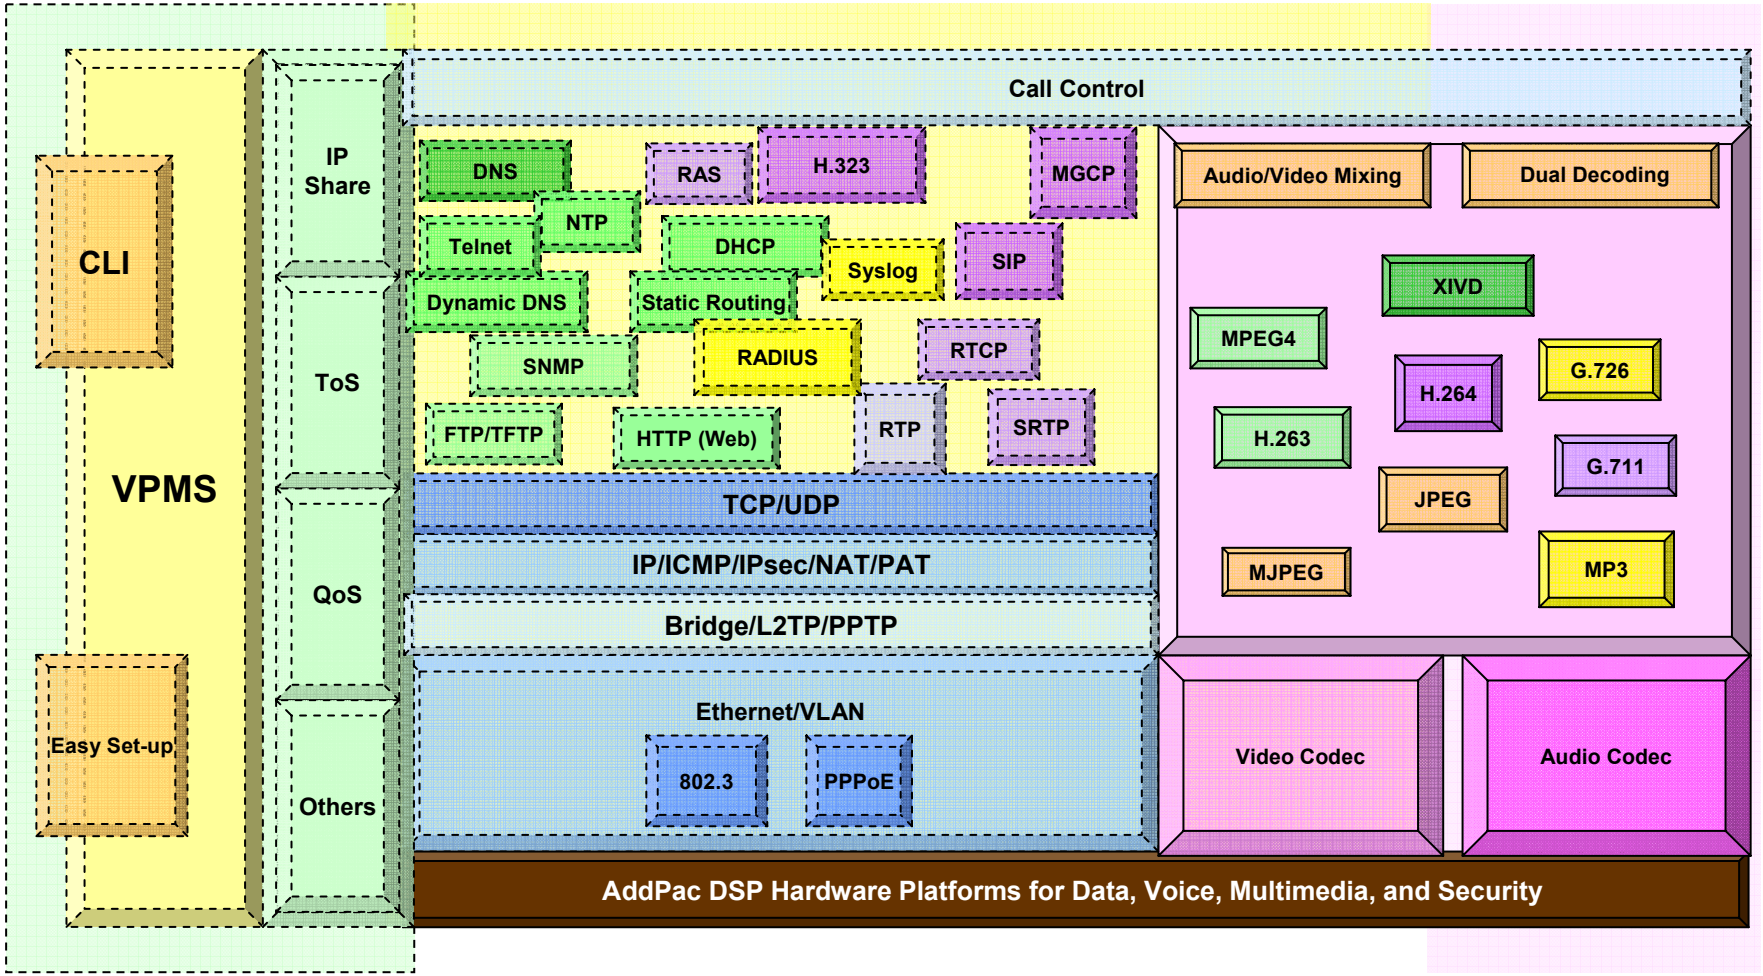

APOSd Software Service

- **Built-in AddPac APOSd Internetworking Software**
  - Scalability, Functionality, and Stability Features
  - Video Traffic QoS Control
- **Programmable Video, Audio, and Voice Services**
  - Video Codes, Audio, and Voice Codec
- **Firmware Upgradeable DSP Architecture**
- **OSD (On-screen Display) Function Support**
- **Industry Standard IP based Network Protocol Features**



Video Codec Features & Service

AddPac

H.263 Video Codec

- **Baseline H.263**
- **Half Pixel Motion Estimation**
- **Variable Size Support**
  - QCIF(176x144), CIF(352x288), QVGA(320x240)
- **Advanced Rate Control**
  - **32kbps ~ 4Mbps , 1frame ~ 30frame**
  - **VBR / CBR / Hybrid CBR**
- **User Control Interface**
  - **Frame rate, Picture size, Target rate, Intra refresh interval**
- **Motion Detection**
- **Multi Channel Encoding**
- **Multi Channel Decoding**
- **High-end Error Resilient Against Various Packet Error**

Video Codec Features & Service

MPEG-4 Video Codec

- **Simple Profile MPEG4**
- **AC/DC Prediction**
- **Half Pixel Motion Estimation**
- **Variable Size Support**
  - QCIF(176x144), CIF(352x288), QVGA(320x240), and VGA(640x480), HVGA(640x240)
- **Advanced Rate Control**
  - **32kbps ~ 4Mbps , 1frame ~ 30frame**
  - **VBR / CBR / Hybrid CBR**
- **User Control Interface**
  - **Frame rate, Picture size, Target rate, Intra refresh interval**
- **Motion Detection**
- **Multi Channel Encoding**
- **Multi Channel Decoding**
- **High-end Error Resilient Against Various Packet Error**

Video Codec Features & Service

H.264 Video Codec

- **Baseline Profile**
- **All 9-Direction Intra-Prediction Modes with 4x4 Block Size**
- **Integer Pel Motion Estimation with 16x16 Block Size**
- **CAVLC (Context-Adaptive Variable Length Coding)**
- **In-Loop Deblock Filter**
- **Variable Size Support**
  - QCIF(176x144), CIF(352x288), QVGA(320x240) : Encoder/Decoder
  - VGA(640x480), HVGA(640x240) : Decoder Only
- **Advanced Rate Control**
  - **32kbps ~ 4Mbps , 1frame ~ 30frame**
  - **VBR / CBR / Hybrid CBR**
- **User Control Interface**
  - **Frame rate, Picture size, Target rate, Intra refresh interval**
- **High-end Error Resilient Against Various Packet**

Video Codec Features &Service

JPEG/M-JPEG Video Codec

- **Variable Size Support**

Audio & Voice Service and Features

MP3 Audio Codec

- MPEG1 / MPEG2 layer-3(LSF) encoding support
- MPEG1 / MPEG2 layer-2, 3 decoding support
- Bit rates support
  - 32kbps ~ 192kbps
  - CBR
- Sampling rates support
  - 16kHz, 22.05kHz, 24kHz (for MPEG2 lsf)
  - 32kHz, 44.1kHz, 48kHz
- Joint-stereo, stereo, mono Channel mode
- Apply Psycho-acoustic model II

AV Mixing Feature for MCU App.

AddPac

Simplified Audio/Video Mixing Model

- Single Codec : H.263 or MPEG4
- Single Rate Control
- Asymmetric Rate Control between Encoder & Decoder
- Same Conference Layout for All Party

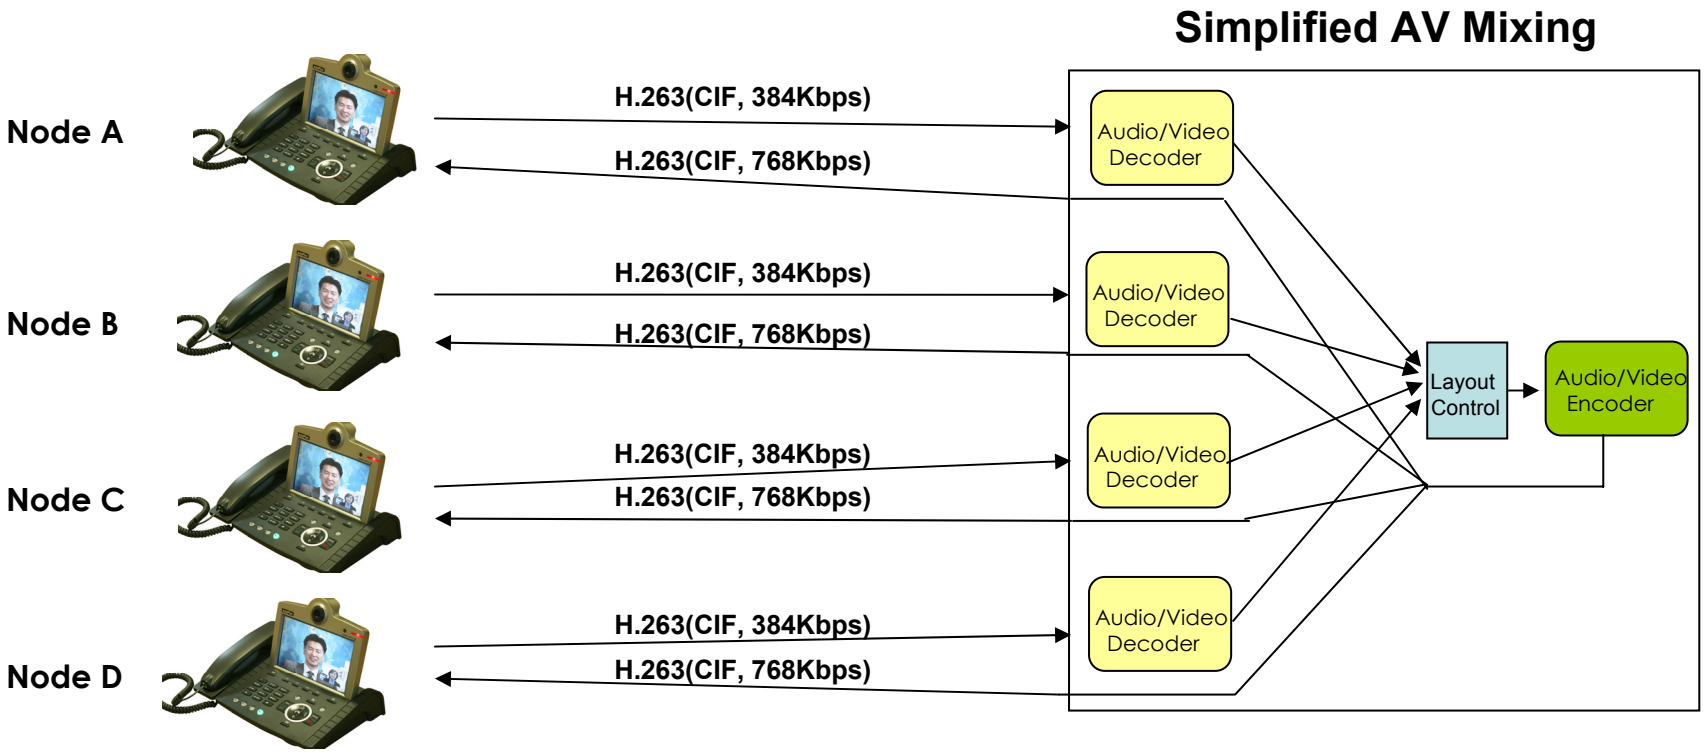

AV Mixing Feature for MCU App.

Advanced Audio/Video Mixing Model

- Multiple Codec : H.263 and MPEG4
- Independent Rate Control
- Asymmetric Rate Control Between Encoder & Decoder
- Independent Conference Layout Control

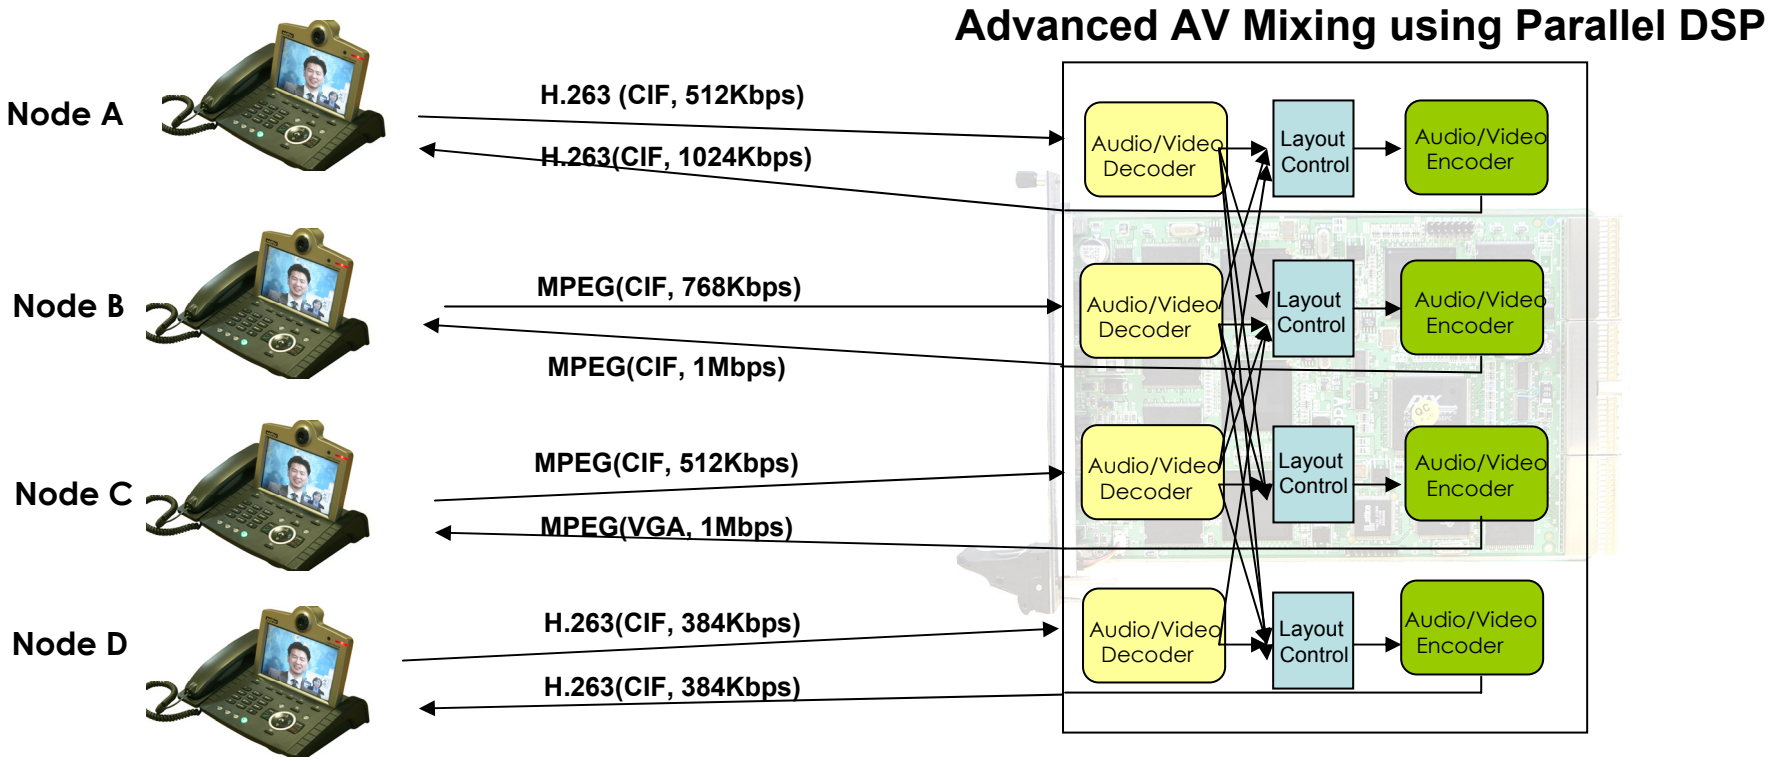

Dual Decoder & Single Encoder

Video Broadcasting + Communication Service Model



AddPac AP5840
Video Broadcasting Server

Video Broadcasting (MPEG4)

IP Network



LAN Port

LAN Port

Video Communication
(H.263,MPEG4,etc)

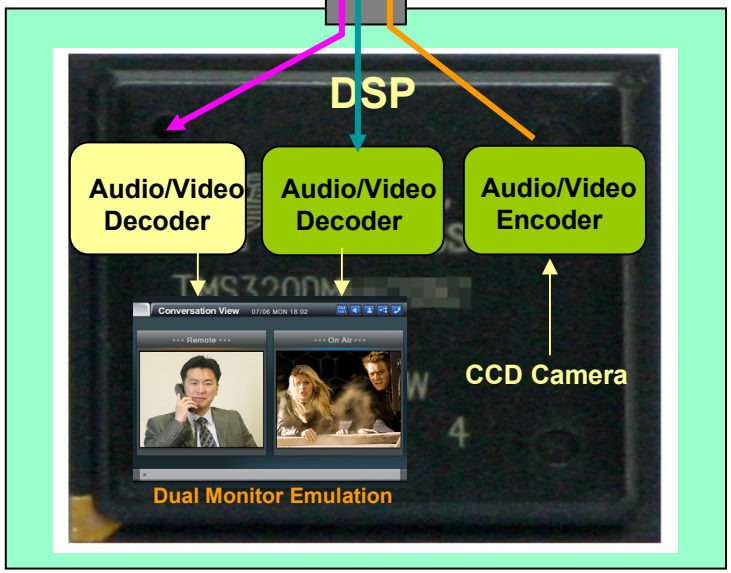

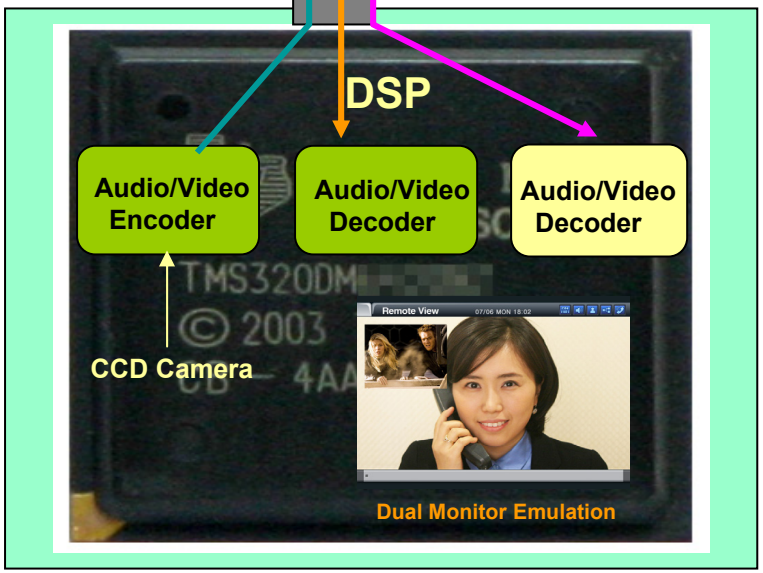

AP-VP300 Video Phone

AP-VP300 Video Phone

Dual Decoder & Single Encoder

Video Broadcasting + Communication Service Model

- **Video Codec for AV Broadcasting :**
  - MPEG4
- **Audio Codec for AV Broadcasting :**
  - MP3, G.711, G.726, etc
- **Video Codecs for Visual Communication :**
  - H.263, MPEG4, H.264

Dual Encoding Feature & Service

AddPac

Network Camera Service

- **Dual Video Encoding for Network Camera**
  - High Quality, Low Frame Rate for Storage (Ex : VGA, 10Frame)
  - Low Quality, High Frame Rate for Real time Display (Ex: CIF, 30 Frame)
- Video Codec : MPEG4
- Service Architecture

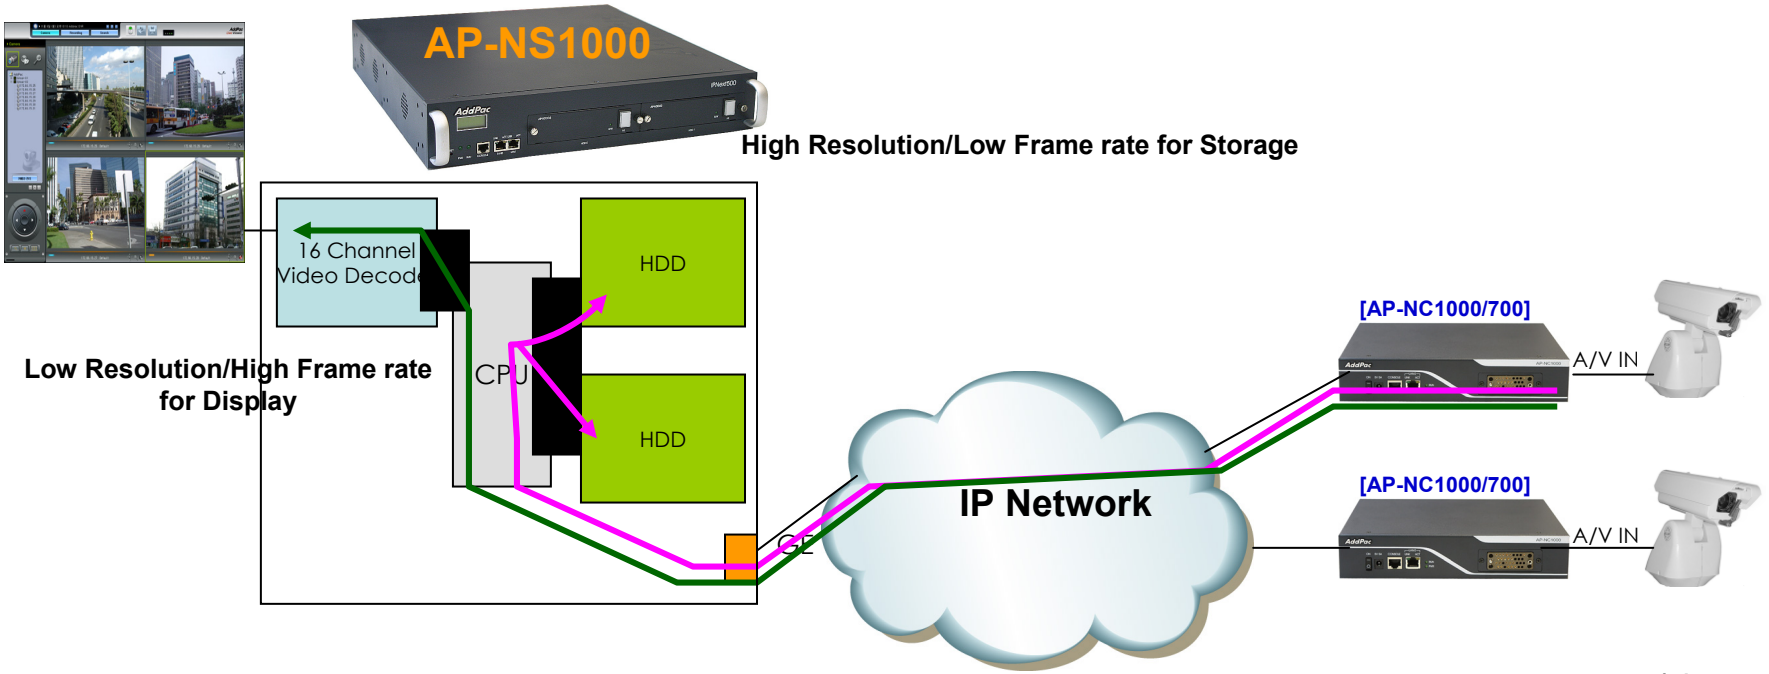

Network Service and Features

AddPac

- **Network Managements**
  - Standard SNMP Agent (MIB v2) Support
  - Remote Management using Console, Telnet
  - Web based Management using HTTP Server Interface
- **Security Functions**
  - Standard & Extended IP Access List
  - Enable/Disable for Specific Network Protocols
  - Multi-level User Account Management
  - Auto-disconnect for Telnet/Console Sessions
  - PPP User Authentication Supports (PAP & CHAP)
- **Operation & Managements**
  - System Performance Analysis for Process, CPU, Connection Interface
  - Debugging, System Auditing, and Diagnostics Support
  - System Booting and Auto-rebooting with Watchdog Feature
  - System Managements with Data Logging
  - IP Traffic Statistics with Accounting

Network Service and Features

- **Network Managements**
  - DHCP Server & Relay Functions
  - Network Address Translation (NAT) Function
  - Port Address Translation (PAT) Function
  - Transparent Bridging (IEEE Standard) Function
    - Spanning Tree Bridging Protocol Support
    - Remote Bridging Support
    - Concurrent Routing and Bridging Support
  - Cisco Style Command Line Interface (CLI)
  - Network time Protocol (NTP) Support

OSD Software Features



Remote Commander

OSD Software Features

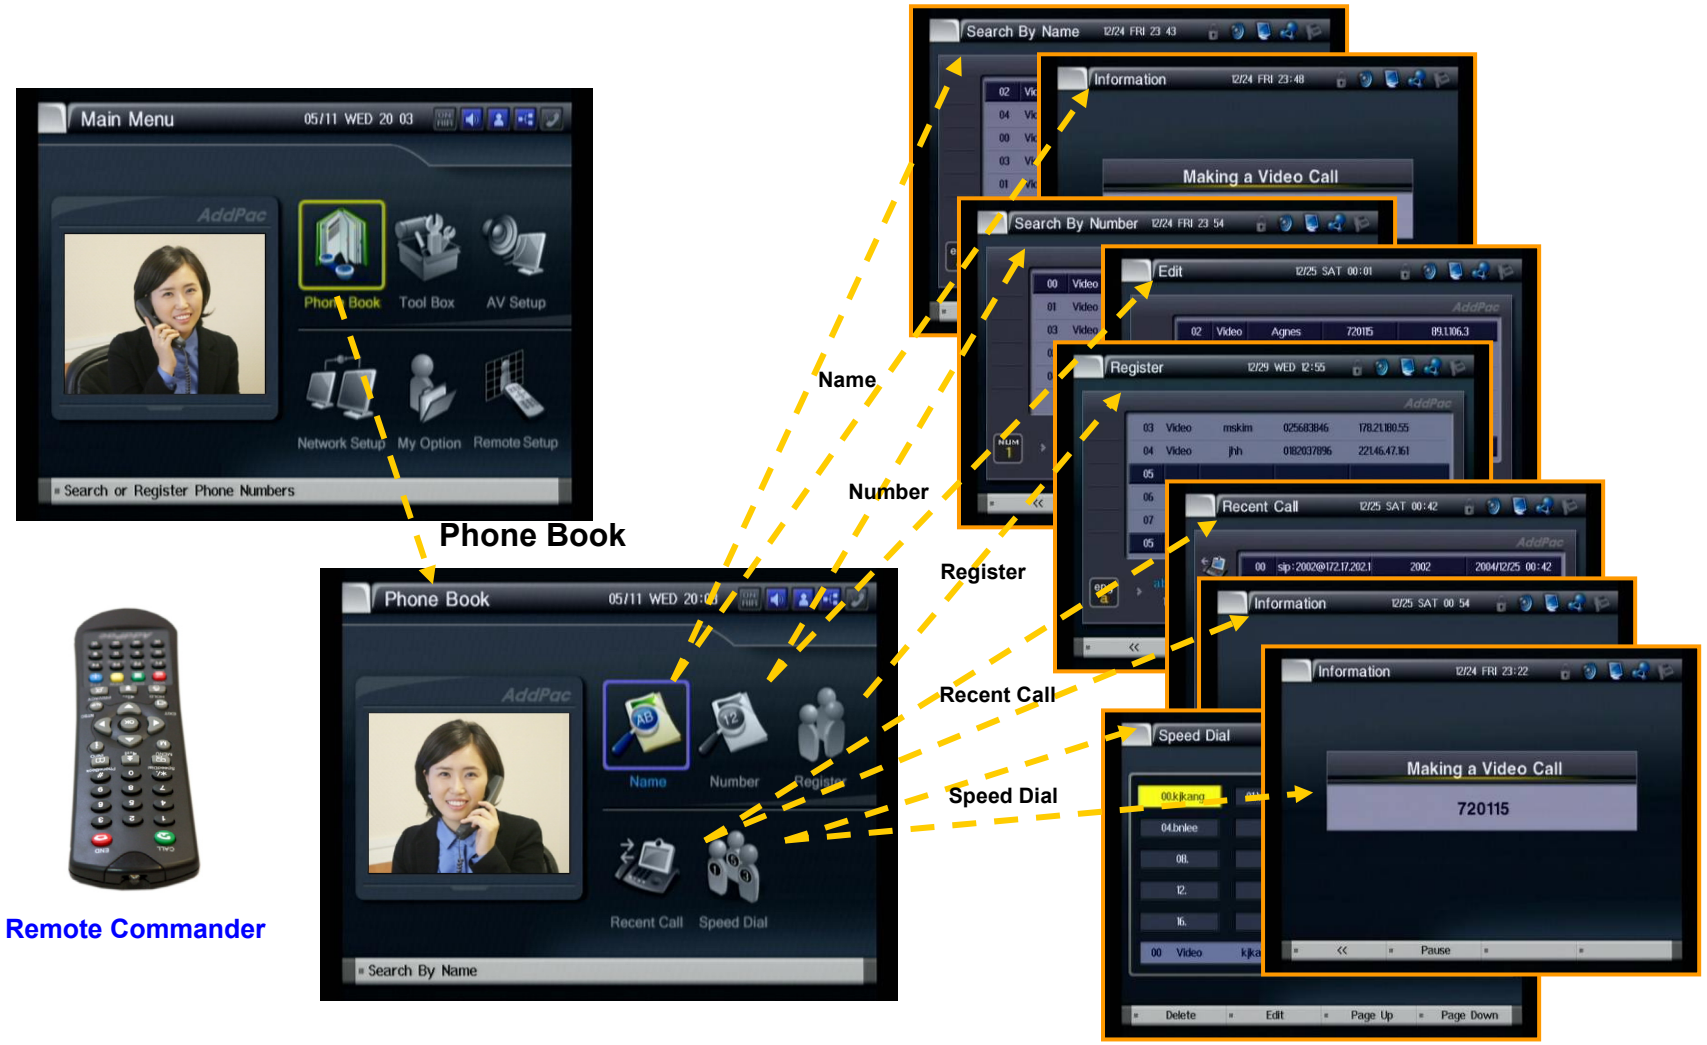

OSD Software Features



AV Setup

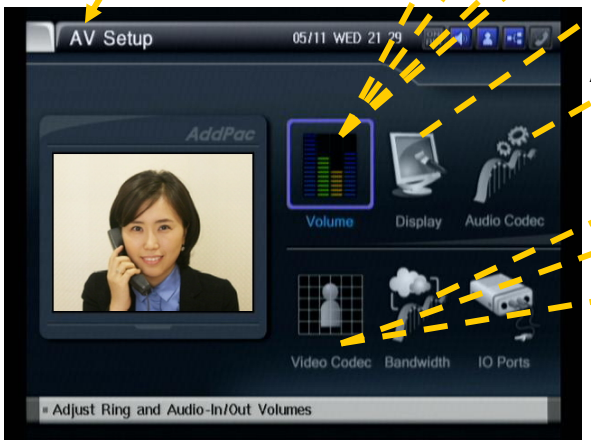



Remote Commander

Volume

Display

Audio Codec

I/O Ports

Video Codec

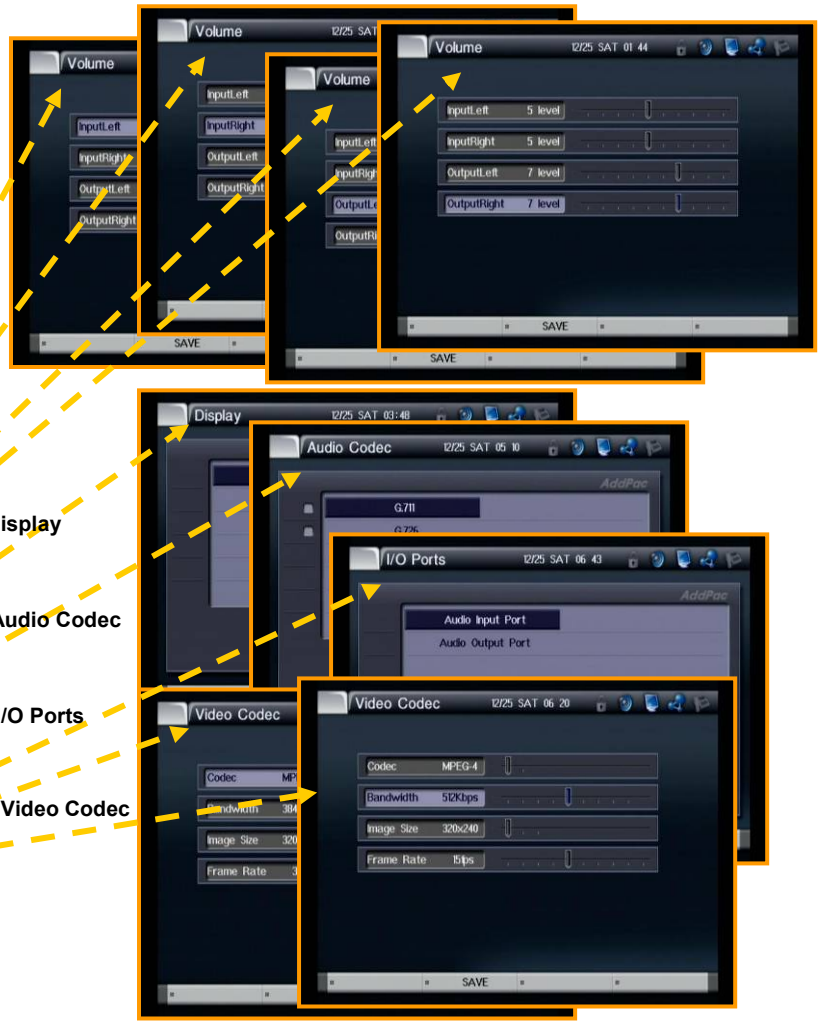

OSD Software Features

AddPac

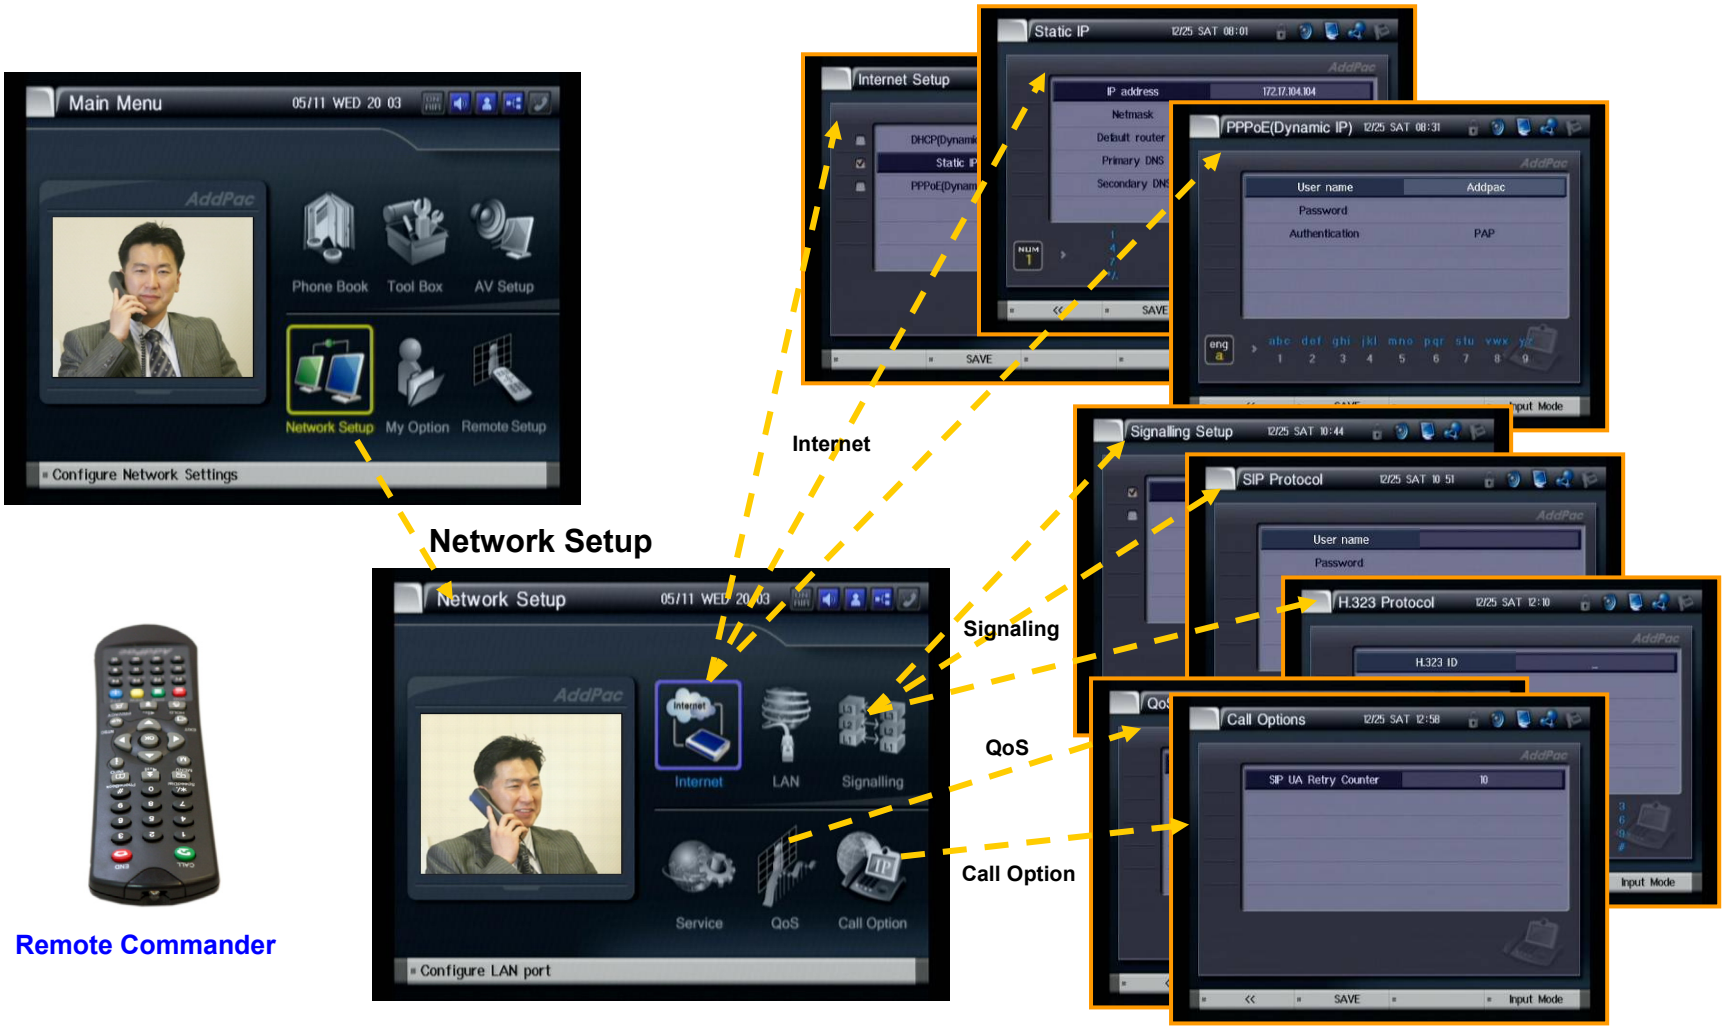

Remote Commander

Thank you!

AddPac Technology Co., Ltd.
Sales and Marketing

Phone +82.2.568.3848 (KOREA)
FAX +82.2.568.3847 (KOREA)
E-mail sales@addpac.com